
# pgf-go




**Manual for version 0.2026.10.16**

Jonatán Perren Hug
jonatan.perren@gmail.com

October 16, 2026

## Contents

**1 Introduction** **3**
1.1 Motivation . . . 3
1.2 What's New . . . 3

**2 The Boards of Kāru** **4**
2.1 Board and Stones . . . 4
2.2 Moves . . . 7
2.3 Partial Board and Marks . . . 8
2.4 The End of the Game: Territory . . . 9

**3 The keystone** **11**
3.1 The `\let` Game . . . 11
3.2 Configuration . . . 11
3.3 The Compute Kernel . . . 13
3.4 Languages . . . 13
3.5 Coordinate Syntax . . . 14
3.5.1 Stone Groups . . . 15
3.5.2 Additive and Subtractive Groups . . . 19
3.6 Profiles . . . 21
3.7 Changing Options on the Fly . . . 24

**4 The Board** **35**
4.1 Grid . . . 37
4.2 Star Points . . . 40
4.3 Border . . . 43
4.4 Partial Board . . . 49
4.5 Board Labels . . . 50
4.6 Captures . . . 53
4.7 Territory . . . 55
4.8 Moves on Points Already Played . . . 61
4.9 Remembering a Board . . . 62
4.10 Views in the Text . . . 63

**5 Stones, Moves, and Prisoners** **65**
5.1 Stones . . . 66
5.2 Moves . . . 71
5.3 SGF Games . . . 75
5.4 Layout of the Diagrams . . . 90
5.5 Prisoners . . . 92

**6 Marks** **92**
6.1 Arrows and Lines . . . 101

**7 Other Examples** **104**

**8 Catalog** **106**
8.1 Profiles . . . 106
8.1.1 default . . . 106
8.1.2 pgfgo . . . 107
8.1.3 pgfgosmooth . . . 107
8.1.4 wain . . . 107
8.1.5 simple . . . 108

**9 Definitions of Stones and Boards** **108**
9.1 Stones and Players . . . 108
9.1.1 pgfgo . . . 108
9.1.2 pgfgosmooth . . . 110
9.1.3 wain . . . 110
9.2 Boards . . . 112
9.2.1 pgfgo . . . 112
9.2.2 pgfgosmooth . . . 112
9.2.3 wain . . . 113
9.3 Whole Profiles . . . 113
9.3.1 simple . . . 113

# 1 Introduction

## 1.1 Motivation

The following package offers a collection of macros designed to represent Go boards and positions, fully implemented in PGF. This project, although still under development, incorporates innovative features aimed at simplifying and streamlining the creation of Go-related diagrams:

- Profile management for boards and players.
- Loading multiple coordinates simultaneously using a syntax that some might find familiar.

The development of PGFGO stems from frustration with not finding packages that met my needs. The packages I explored allow for the representation of black-and-white boards, suitable for printing, but impractical when combined with technologies like `beamer` or in documents where a color presentation is desired.

Initially, PGFGO was intended to be limited to these tasks; however, I now envision it more as an interface for managing styles and states, avoiding excessive use of direct formatting. This will be reflected primarily in the structure of the *keys* tree.

Regarding the name, although the macros are implemented in PGF and L3, the board is built on `\tikzpicture` so that users familiar with this environment can take advantage of its macros.

## 1.2 What's New

- 0.2026.10.16:
  - The computations (coordinates, move numbers, memory, etc.) have been separated from the drawing. They are done by a *kernel*, chosen with the package option `kernel` (p. 13). Besides the kernel written in L3, a kernel written in Lua has been added, which is the default with LuaLaTeX.
  - With the Lua kernel, captures (`captures`, p. 53) and SGF games (`\sgf`, p. 75) have been added. With the `animate` package, `\sgfanimation` steps through a game with buttons.
  - "N at M" notes have been added for numbered moves on points already played (`notes` and `\pgfgomovenotes`, p. 61).
  - SGF: variations (`variation`), the marks of the file (`marks`), the game information (`\sgfinfo`), numbering with `MN` and `restart`, and the board size taken from the file (`sgf size`).
  - SGF: collections of games (`game`), the view (`VW`, `sgf view`), figures (`FG`) in `\sgfdiagrams`, variations as letters (`variations`), `PL` and Latin-1 files.
  - SGF: node names and annotations (`TE`, `BM`, `GB`, etc.) are written with the comments. `\sgfcomment` writes the comment of a move, and `\sgfdiagrams` can write the comments below each diagram (`comments`).
  - Arrows and lines (`\arrow` and `\line`, p. 101) and the `dim` mark have been added. `\sgf` also draws `AR`, `LN`, `SL` and `DD`.
  - The board draws the star points (`hoshi`, p. 40).
  - `\territory`, which marks the territory (with a polygon, or by itself with `auto` and the Lua kernel), and `\pgfgoscore`, which counts the points, have been added.
  - `\sgfanimation` builds the animation by layers (`layers`): every stone is drawn only once, and the PDF of a long game is much smaller.
  - With `captured marks = remove`, the marks on a captured stone go with it.
  - `\pgfgoprisoners`, which counts the prisoners of each player, and `\sgfdiagrams`, which draws a game as a series of diagrams, as books do, have been added.
  - `\sgfproblem`, which draws a problem (tsumego): the statement and one diagram for each variation of the solution, with its comments, has been added.
  - SGF: the numbering that `PM` asks for (`numbers` and `restart = auto`), and the view (`VW`) when it changes during the game (`sgf view move`; `\sgfdiagrams` and `\sgfanimation` use it by themselves). `\sgfdiagrams` writes the result and the score below the last diagram (`result`).
  - The coordinates on the border can be letters, numbers or kanji on each axis, counted from either side (`columns`, `rows`, `style = japanese`, etc.).

  - SGF: files in GBK, Big5, Shift_JIS, EUC-JP and EUC-KR are read (`CA` or `sgf charset`).

- 0.2025.10.13: Bug fixes. Each `goban` starts at move 1 with Black, `\mark` and `\marks` only exist inside `goban`, and what falls outside a partial board is no longer drawn. The full list is in the file `CHANGELOG.md`.
- 0.2025.03.10:
  - The *keys* `inner` and `outer` have been added for the *rounded corner* of the board.
  - Three new coordinate operators have been added: `*` for all intersections, `L` for vertical lines, and `N` for horizontal lines.
- 0.2025.03.07: First release.

# 2 The Boards of Kāru

## 2.1 Board and Stones

Kāru is writing an article to share with his students. He has noticed that diagramming *software* does not offer satisfactory formats or results. Therefore, he decides to try PGFGO and starts by representing a game like the one shown in Figure 1.







Figure 1

Kāru must start with the board. In PGFGO, there is currently a single environment where elements can be placed: `goban`. This environment controls by default the size and color of the board, the position and type of labels, among other properties. It also allows partial board representations.




```
\begin{goban}
\end{goban}
```

Kāru is satisfied. The environment provides a default $9 \times 9$ board, which is exactly what he needs, but he must add side labels. The `goban` environment does not require mandatory parameters, although it accepts an optional one: a list of `keys` or `key=values` for configuration. Kāru consults the section on `goban` (p. 35) and decides to add labels to the environment. He knows that the *keys* controlling the objects in the goban are divided into three groups: `grid`, for the central grid; `background`, for the border and board fill; and `label`, for coordinate labels. The latter is the one that interests him. This *key*, among other options, can take the *key* `at` to define the label position with values such as `above`, `west`, `below`, `right`, `all`, or `none`. Cardinal points can also be used. Since he only wants labels above and to the left of the goban, he will use the *keys* `above` and `left`.




```
\begin{goban}[label = {at = {above, left}}]
\end{goban}
```


Kāru feels that everything is going well, but he notices that his board includes an `I` instead of omitting it and going directly to `J`. By default, in PGFGO, "I" exists and is used both as a coordinate and in the side labels, although it is possible to remove it. There are two ways to do this: setting `goban/use i` to `false` for every board (`\pgfgoset{goban = {use i = false}}`), which would prevent Kāru from worrying about this throughout the rest of the article, or applying it directly to the board with the same *key* and value.

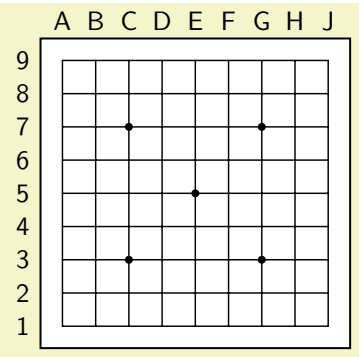


```
\pgfgoset{goban = {use i = false}}

\begin{goban}[label = {at = {above, left}}]
\end{goban}
```


Now he is ready to place the stones. For this, Kāru has several macros. Let's start with the most basic one: `\stone[options]{intersection}`. This command accepts two parameters: the first, optional, controls the appearance and additional elements of the stones (such as marks); the second, mandatory, is the intersection. Kāru does not need to convert intersections to numbers since he can specify them alphanumerically. By default, the stones are neutral, but he can choose the first player by passing the *key* `black` or `b`.




```
\begin{goban}[label = {at = {above, left}}, use i = false]
 \stone[black] {D8}
 \stone[black] {F8}
 \stone[b] {E7}
 \stone[b] {H7}
\end{goban}
```


Kāru suspects that this is not the best option if he needs to add 200 stones or more. To simplify the syntax, he finds in the documentation the macro `\stones[options]{intersection, intersection, ...}`, which accepts the same optional *keys* as `\stone`.[1]

[1] Between `\stone{A1}` and `\stones{A1}`, the first one is much faster. We will see later that many processes are involved in reading the mandatory argument of the plural macros.

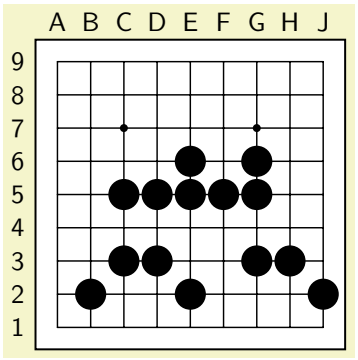


```
\begin{goban}[label = {at = {north, west}}, use i = false]
 \stones[b]{B2,E2,J2,C3,D3,G3,H3,C5,D5,E5,F5,G5,E6,G6}
\end{goban}
```

Kāru also notices that there is a syntax (p. 14) to add several coordinates at once. For example, for a line of stones from C5 to G5, he can write `C:G5` or `C5--G5`.

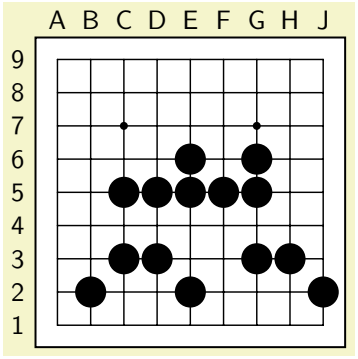


```
\begin{goban}[label = {at = {north, west}}, use i = false]
 \stones[b]{B2,E2,J2,C3,D3,G3,H3,E6,G6,C:G5}
\end{goban}
```

To add white stones, Kāru must include the *key* `white` in the `\stones` command. He knows that `white` and `black` do not literally refer to the colors white and black, but to the second and first player, respectively, and that when these *keys* are applied, the objects inherit their properties.



```
\begin{goban}[label = {at = {north, west}}, use i = false]
 \stones[b]{B2,E2,J2,C3,D3,G3,H3,E6,G6,C:G5}
 \stones[w]{D8,F8,E7,H7,C6,D6,F6,H6,B5,B4,E4,H2,J3:5}
\end{goban}
```

Finally, the style of his board remains. For this, he looks through the catalog (p. 106) and finds a style he likes: `pgfgo`. To apply it, he reads the section on profiles (p. 21) and decides to use the key `profile`: `\pgfgoset{profile = <name>}`.

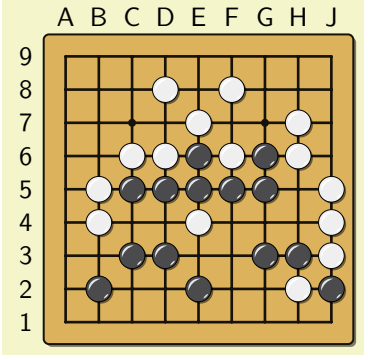

```
\pgfgoset{profile = pgfgo}

\begin{goban}[label = {at = {north, west}}, use i = false]
 \stones[b]{B2,E2,J2,C3,D3,G3,H3,E6,G6,C:G5}
 \stones[w]{D8,F8,E7,H7,C6,D6,F6,H6,B5,B4,E4,H2,J3:5}
\end{goban}
```

## 2.2 Moves


When the stones are to be placed in order, following the sequence ”black, white, black, white”, it can be tedious and unnecessary to give the *key* of each player.

```
\begin{goban}
 \stone[b] {F7}
 \stone[w] {E6}
 \stone[b] {G3}
 \stone[w] {D6}
\end{goban}
```

That is why PGFGO includes macros that make this easier. Let's start with the singular one:

`\move[`⟨*options*⟩`]{`⟨*intersection*⟩`}`

This command works like `\stone`, but alternates the colors automatically.

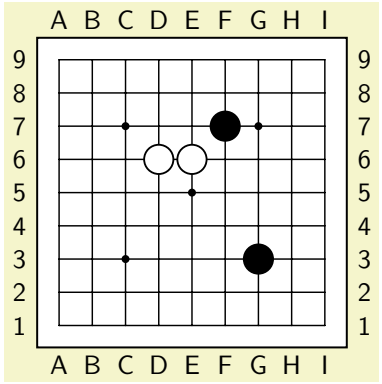



```
\begin{goban}[label = {at = all}]
 \move {F7}
 \move {E6}
 \move {G3}
 \move {D6}
\end{goban}
```

The macro `\move`, like `\stone`, has a plural version:


`\moves[`⟨*options*⟩`]{`⟨*intersection*⟩`}`

In this case, giving the *key* `black` or `white` only sets who is the first player of the sequence.

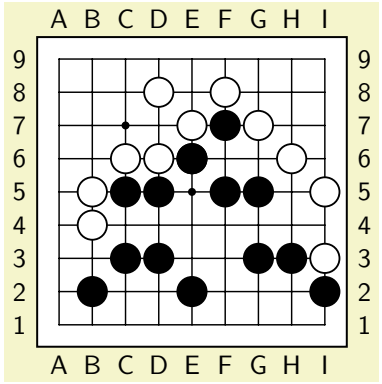


```
\begin{goban}[label = {at = all}]
 \stone[b] {F7}
 \moves[white] { E6,G3,D6,F5,E7,E2,F8,E6,D8,D3,
  G7,C5,C6,D5,B5,G5,B4,B2,H6,C3,
  I3,I2,I5,H3}
\end{goban}
```

The macros `\move` and `\moves` also have ”starred” versions (`\move*` and `\moves*`), which label the moves. The *key* `from` sets the number where the labels start.

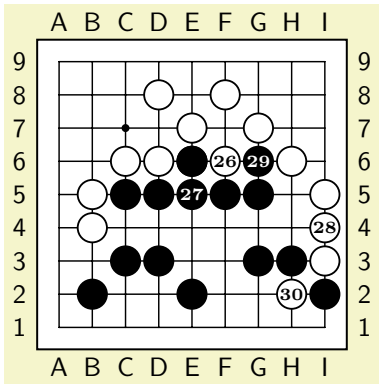



```
\begin{goban}[label = {at = all}]
 \moves[white] { E6,G3,D6,F5,E7,E2,F8,E6,D8,D3,
  G7,C5,C6,D5,B5,G5,B4,B2,H6,C3,
  I3,I2,I5,H3}

 \moves*[from = 26]{F6,E5,I4,G6}
 \move* {H2} % Black and labeled 30, without saying so.
\end{goban}
```


In this last example, `H2` was placed with `\move*` and, although it is separate from `\moves*`, it is black and labeled 30, because the last stone placed (`G6`) was black and labeled 29.

## 2.3 Partial Board and Marks

Sometimes we want to focus on a particular region of the board. For this reason, it is possible to show only a portion of it.




To draw this board, we start by placing the stones.




```
\begin{goban}
 \stones[b] {C2,B3,C4}
 \stones[w] {D4,E3,D2,C3}
\end{goban}
```

With the *key* `partial`, we can set the range of the board through its *key* `from`. It takes a value of the form `LN to LN`, where each `LN` is one of a pair of opposite vertices of the rectangle.



```
\begin{goban}[partial = B2:E4]
 \stones[b] {C2,B3,C4}
 \stones[w] {D4,E3,D2,C3}
\end{goban}
```

To remove the line of the board, we use the *key* `line` of the `background` of the `goban`.



```
\begin{goban}[partial = B2:E4, background = {line = false}]
 \stones[b] {C2,B3,C4}
 \stones[w] {D4,E3,D2,C3}
\end{goban}
```


Now, to place marks we have the macro

`\mark[`⟨*options*⟩`]{`⟨*intersection*⟩`}`

and its plural version.


This macro is quite broad and is documented on its own page. For now, we need to know two things:

- The mark for the circle is called `circle`.
- The mark "!" can be added with `custom`.




```
\begin{goban}[partial = B2:E4, background = {line = false}]
 \stones[b] {C2,B3,C4}
 \stones[w] {D4,E3,D2}
 \mark[custom = {!}] {D3}
 \stone[w, mark = circle] {C3}
\end{goban}
```

We can change the line color of a mark with the *key* `mark/line/color`.




```
\begin{goban}[partial = B2:E4, background = {line = false}]
 \stones[b] {C2,B3,C4}
 \stones[w] {D4,E3,D2}
 \mark[custom = {!}] {D3}
 \stone[w, mark = {circle, line = {color = red}}] {C3}
\end{goban}
```

## 2.4 The End of the Game: Territory




Let's start from the following board:

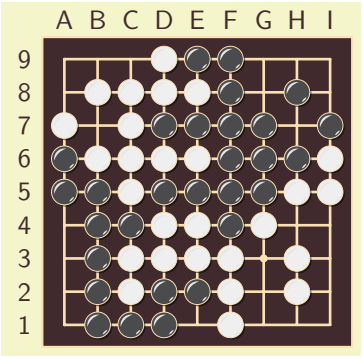



```
\pgfgoset{profile = wain}

\begin{goban}[label = {at = {above, left}}]
 \stones[b] {A6|-B5|-D1|-E2, C4, E9-|F4, D5-|G7--D7, H6, H8, I7}
 \stones[w] {E8-|C5, B:E6, A7, B8, D9, I6|- H5, H2:3, F1|-C3, C2, D:E4, G4}
\end{goban}
```

The next step is to identify the prisoner stones. Prisoners can be marked with the *key* `prisoner` or with the macro

`\prisoner[`⟨*options*⟩`]{`⟨*intersection*⟩`}`

which also has a plural version.

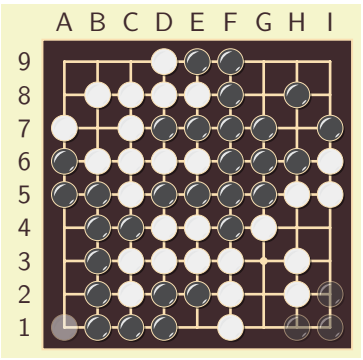



```
\pgfgoset{profile = wain}

\begin{goban}[label = {at = {above, left}}]
 \stones[b] {A6|-B5|-D1|-E2, C4, E9-|F4, D5-|G7--D7, H6, H8, I7}
 \stones[w] {E8-|C5, B:E6, A7, B8, D9, I6|- H5, H2:3, F1|-C3, C2, D:E4, G4}

 \stones[b, prisoner]{H1-|I2} % Same as \prisoners[b] {...}
 \prisoner[w] {A1} % Same as \stone[w, prisoner] {...}
\end{goban}
```

Now let's define the territories. This can be done in many ways. In particular, two are implemented for sure: the mark `t-square` and the mark `t-circle`. These marks always take as fill the fill color of the stone they belong to, and as border color and width those of the grid.

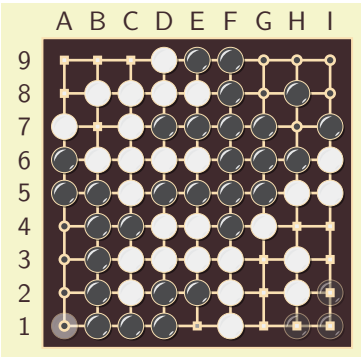



```
\pgfgoset{profile = wain}

\begin{goban}[label = {at = {above, left}}]
 \stones[b] {A6|-B5|-D1|-E2, C4, E9-|F4, D5-|G7--D7, H6, H8, I7}
 \stones[w] {E8-|C5, B:E6, A7, B8, D9, I6|- H5, H2:3, F1|-C3, C2, D:E4, G4}

 \stones[b, prisoner]{H1-|I2}
 \prisoner[w] {A1}

 \marks[b, t-circle]{A1:4, G8|-I9, I8, H7}
 \marks[w, t-square]{G3|-I1|-H4, C9-|A8, B7}
 \marks[t-square, fill = {color = red}] {E1} % Not filled in red: it takes the neutral color.
\end{goban}
```

Another way is `\territory` (p. 55). With a polygon, it marks the points of that region that have no living stone; with `auto` and the Lua kernel, it finds the territory of each player by itself. `\pgfgoscore` writes the score.



Black: 11. White: 23.5.

```
\pgfgoset{profile = wain}

\begin{goban}[label = {at = {above, left}}]
 \stones[b] {A6|-B5|-D1|-E2, C4, E9-|F4, D5-|G7--D7, H6, H8, I7}
 \stones[w] {E8-|C5, B:E6, A7, B8, D9, I6|- H5, H2:3, F1|-C3, C2, D:E4, G4}

 \stones[b, prisoner]{H1-|I2}
 \prisoner[w] {A1}

 \territory[dame]{auto}
\end{goban}

Black: \pgfgoscore{black}. White: \pgfgoscore[komi = 6.5]{white}.
```

# 3 The keystone

## 3.1 The `\let` Game

`\mark` and `\marks` are TEX primitives. To leave them untouched, the PGFGO macros `\mark` and `\marks` only exist inside the `goban` environment. Outside it they are still the primitives, so page marks and running heads are not affected. `\sgf` does not exist outside `goban` either.

## 3.2 Configuration

The macro `\pgfgoset{...}` allows defining general configurations for the package. It is equivalent to `\keys_set:nn{pgfgo}{...}`, meaning it uses the LaTeX3 key system to set options in a structured and hierarchical manner. This macro is particularly useful for customizing the package's global behavior, such as the appearance of the board, stones, or moves, without needing to repeat configurations in each individual environment. For example, a user could define custom colors for players or adjust the board's design to apply to all diagrams in the document. It also serves as a gateway to direct formatting.[2]

`\pgfgoset{`⟨*options*⟩`}`

`/pgfgo/goban` = ⟨*goban options*⟩ (no default)

Sets general options for the board. This includes properties such as size, background color, visibility of grid lines, or coordinate labels. For example, it can be used to create partial boards or modify the visual style of the border.

`/pgfgo/stone` = ⟨*stone options*⟩ (no default)

Defines general options for stones, such as their fill color, outline, or default markings. It is useful for establishing a consistent style across all stones in a document (neutral, white, or black).

`/pgfgo/move` = ⟨*move options*⟩ (no default)

Sets general options for moves, such as the format of their numbers. It is the same as `\pgfgoset{players = {all = {m`

`/pgfgo/mark` = ⟨*mark options*⟩ (no default)

[2] Use with discretion…unlike footnotes.

Sets general options for the marks: the default shape of `\marks` (`\pgfgoset{mark = {triangle}}`) and the style of the marks of the three players (`line`, `fill`, `label`, `sequence` and `scale`). `\pgfgoset{mark = {line = {color = red}}}` is the same as `\pgfgoset{players = {all = {mark = {line = {co`

`/pgfgo/sgf animation` = ⟨*sgf animation options*⟩ (no default)

Options of every `\sgfanimation` in the document (p. 75).

`/pgfgo/sgf diagrams` = ⟨*sgf diagrams options*⟩ (no default)

Options of every `\sgfdiagrams` in the document (p. 75).

`/pgfgo/sgf problem` = ⟨*sgf problem options*⟩ (no default)

Options of every `\sgfproblem` in the document (p. 75).

`/pgfgo/sgf comment` = ⟨*sgf comment options*⟩ (no default)

Options of every `\sgfcomment` in the document (p. 75).

`/pgfgo/sgf info` = ⟨*sgf info options*⟩ (no default)

Options of every `\sgfinfo` in the document (p. 75).

`/pgfgo/sgf annotations` = ⟨*texts*⟩ (no default)

The texts of the annotations of SGF files (p. 75).

`/pgfgo/arrow` = ⟨*arrow options*⟩ (no default)

Options of every arrow in the document (p. 101).

`/pgfgo/line` = ⟨*line options*⟩ (no default)

Options of every line in the document (p. 101).

`/pgfgo/territory` = ⟨*territory options*⟩ (no default)


Options of every `\territory` in the document, like `draw = fill` (p. 55).

`/pgfgo/score` = ⟨*score options*⟩ (no default)

Options of every `\pgfgoscore` in the document, like `komi = 6.5` (p. 55).

`/pgfgo/players` = ⟨*players options*⟩ (no default)

Allows defining options for each player (including neutral ones). This *key* acts as a container encompassing specific configurations for black, white, and neutral players, facilitating customization based on the user's rules or preferences. All available options and how to customize stone styles will be detailed in another section.



```
\pgfgoset{
 goban = {
  background = {
   fill = {color = pgfgo},
   line = false},
  grid = {line = {color = white}}},
 players = {
  black = {
   stone = {
    line = {color = magenta},
    fill = {color = blue!50!black}}},
  white = {
   stone = {line = {color = blue}},
   mark = {line = {color = orange}}
  }
 }
}

\begin{goban}[3]
 \stone[black] {A1}
 \stone[white, mark = {triangle}] {A2}
\end{goban}

\begin{goban}[4]
 \stone[black] {A2}
 \stones[white, mark = {circle}] {B2,A3}
\end{goban}
```

Subsequent `goban` environments inherit these configurations, although they can be overridden locally if necessary. Besides the options of the board, the options of a `goban` accept those of `\pgfgoset`, which then apply only to that board: `\begin{goban}[9, stone = {radius = 4pt}, mark = {line = {color = red}}]`.

Many *keys* turn something on or off: the grid, the background, the coordinates, the outline and the fill of the stones, their shadows and their shines, etc. All of them follow the same rule:

- the *key* alone, or with `true`, turns it on: `shine`, `shine = true`;
- with `false`, it turns it off: `shine = false`;
- giving options does not turn it on: `shine = {angle = 45}` changes the angle, but the shine stays as it was. To turn it on and change it at once, `shine = {true, angle = 45}`.

The exceptions are the *keys* whose value is the content itself, such as `partial` (the part of the board) and `sequence` (where the numbering starts).

## 3.3 The Compute Kernel

PGFGO separates computing from drawing. The computations (reading coordinates, knowing which part of the board is visible, numbering moves and keeping track of the turn, remembering boards, etc.) are done by a *kernel*. The drawing, the *keys* and the profiles are always the same. There are two kernels:

- `lua`: written in Lua. It needs LuaLaTeX, and it is the default with LuaLaTeX.
- `expl3`: written in L3. It works with any engine, and it is the default with the other ones.

Both produce exactly the same diagrams. The Lua kernel can also do three things that the other one cannot: captures (p. 53), finding the territory with `\territory{auto}` (p. 55) and reading SGF games (p. 75). This manual is compiled with the Lua kernel.

`/pgfgo/package/kernel` = ⟨*expl3 or lua*⟩ (no default, initially `lua with LuaLaTeX, expl3 with other engines`)

Package option that chooses the kernel. It is only needed to use `expl3` with LuaLaTeX. It can only be given when PGFGO is loaded; it cannot be changed with `\pgfgoset`. If `kernel = lua` is requested with pdfLaTeX, the package warns and uses `expl3`. With `expl3`, `captures`, `\territory{auto}` and `\sgf` raise an error.

```
\usepackage[kernel = expl3]{pgf-go}
```

## 3.4 Languages

Some texts are written by the package itself: the captions of `\sgfdiagrams` and `\sgfproblem`, the result of the game, the annotations of the comments (`/pgfgo/sgf annotations`) and the word of the "N at M" notes. They are translated into English (`en`), Spanish (`es`), French (`fr`), German (`de`), Portuguese (`pt`), Italian (`it`), Esperanto (`eo`), Japanese (`ja`), Chinese (`zh`) and Korean (`ko`). Japanese, Chinese and Korean need a font with those characters.

By default, the texts are in the language set by babel or polyglossia, and they follow it if it changes within the document (`\selectlanguage`, `otherlanguage`). Without babel or polyglossia, or in a language without a translation, they are in English. Each text can be changed with its key (for example, `/pgfgo/sgf diagrams/title`); what is set this way holds in any language.

`/pgfgo/lang` = ⟨*language*⟩ (no default, initially `auto`)

Language of the texts: `auto` (the one of babel or polyglossia), the code of a language (`fr`) or the name babel or polyglossia give it (`french`). If the language is not known, the package warns and uses English.

```
\pgfgoset{lang = fr}
```

`/pgfgo/package/lang` = ⟨*language*⟩ (no default, initially `auto`)

The same, as a package option: `\usepackage[lang = fr]{pgf-go}`.

\pgfgotext{⟨*text*⟩}

Writes one of the texts in the current language. The texts, with their value in English and in Spanish, are:

| | | |
|---|---|---|
| `tesuji` | Tesuji | Tesuji |
| `very good tesuji` | Very good tesuji | Muy buen tesuji |
| `bad move` | Bad move | Mala jugada |
| `very bad move` | Very bad move | Muy mala jugada |
| `doubtful` | Doubtful move | Jugada dudosa |
| `interesting` | Interesting move | Jugada interesante |
| `good for black` | Good for Black | Bueno para Negras |
| `very good for black` | Very good for Black | Muy bueno para Negras |
| `good for white` | Good for White | Bueno para Blancas |
| `very good for white` | Very good for White | Muy bueno para Blancas |
| `even` | Even position | Posición pareja |
| `unclear` | Unclear position | Posición incierta |
| `diagram` | Diagram | Diagrama |
| `variation` | Variation | Variante |
| `black to play` | Black to play | Juegan Negras |
| `white to play` | White to play | Juegan Blancas |
| `at` | at | en |
| `result` | Result | Resultado |
| `black` | Black | Negras |
| `white` | White | Blancas |
| `win` | ⟨*winner*⟩ wins | Ganan ⟨*winner*⟩ |
| `win by points` | ⟨*winner*⟩ wins by ⟨*points*⟩ points | Ganan ⟨*winner*⟩ por ⟨*points*⟩ puntos |
| `win by resignation` | ⟨*winner*⟩ wins by resignation | Ganan ⟨*winner*⟩ por abandono |
| `win on time` | ⟨*winner*⟩ wins on time | Ganan ⟨*winner*⟩ por tiempo |
| `win by forfeit` | ⟨*winner*⟩ wins by forfeit | Ganan ⟨*winner*⟩ por incomparecencia |
| `draw` | Draw (jigo) | Empate (jigo) |
| `void` | No result | Sin resultado |
| `unknown result` | Unknown result | Resultado desconocido |

Black to play. Tesuji. Noir joue.

```
\pgfgotext{black to play}. \pgfgotext{tesuji}.

\pgfgoset{lang = fr}
\pgfgotext{black to play}.
```

\pgfgodefinelanguage{⟨*language*⟩}{⟨*texts*⟩}

Adds a language, or changes texts of an existing one. Missing texts are taken from English. In the texts of the result, `\pgfgowinner` is the name of the winner and `\pgfgopoints` the difference (p. 75).

```
\pgfgodefinelanguage{en}{black = Black player,
 win by points = \pgfgowinner{} wins by \pgfgopoints}
```

\pgfgolanguagealias{⟨*name*⟩}{⟨*language*⟩}

Another name for a language, for example the one babel or polyglossia give it, if PGFGO does not know it.

```
\pgfgolanguagealias{castellano}{es}
```

## 3.5 Coordinate Syntax

One feature that distinguishes PGFGO from other packages is the ability to input coordinates using various syntaxes, offering flexibility to represent positions on the board intuitively.

- Multiple entries can be separated by commas.


- Stones can be removed by adding a subtractive group after a semicolon («;»).

However, for performance and consistency reasons, some freedoms that were initially unrestricted have been limited. For example, to refer to an intersection, the alphabetical coordinate must be written in uppercase and without spaces. Thus, the B5 intersection must be entered as `B5`, not as `B 5`, `B  5`, or `b5`, since spaces between the letter and number are invalid in this context. Restrictions will be explained in each case.

When PGFGO has to read the coordinate argument, it may encounter something like this:

```
\stones{<item>, <item>, …; <item>, <item>, …; …}
```

The first thing it will try to do is split the argument at the `;` and build two groups: the additive group and the subtractive group. The additive group is responsible for adding stones using our syntax. The subtractive group is responsible for removing them. These groups alternate automatically when a `;` is placed. This is explained in more detail in the corresponding subsection. If no `;` is placed, PGFGO will add all the stones to the additive group. Multiple stones or multiple groups separated by `,` can be added. Together, all this provides an interface to create complex groups with few *tokens*:

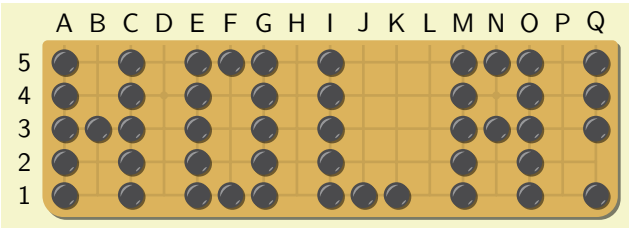



```
\pgfgoset{profile = pgfgosmooth}

\begin{goban}[17, partial = A1:Q5, label = {at = {north, west}}]
 \stones[b]{*;B,D,H,L,Q2,P,F2:4,J2rK5,N1:2,N4;B3}
\end{goban}
```

### 3.5.1 Stone Groups

**All the stones on the board (*Why not?*)**

Adds all the **visible** intersections of the board to the corresponding group. That is, if it is a partial board, only those corresponding to the visible region will be added. It is important to clarify this in case it is used in combination with `resume`. Its syntax is `*`.





```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[label = {at = {south, west}}]
 \stones[b]{*}
\end{goban}
```

**Intersection**

Intersections are specified by indicating the letter followed by the number, with no spaces between the alphabetic and numeric components.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[label = {at = {south, west}}]
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \stone[w]{B 3} % Not recognized because it has a space.
\end{goban}
```


In the example, `B 3` is not recognized due to the space, while `B4` is correctly drawn as a white stone.

**Vertical or Horizontal Lines**

Lines are groups of vertical or horizontal stones implicitly delimited by the size of the board.

- For horizontal lines, the syntax is `L`.

- For vertical lines, the syntax is `N`.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{B2,B3,B4}
 \stones[fill = {color = red}]{D}
\end{goban}


\begin{goban}
 \stones[b]{B2,C2,D2}
 \stones[fill = {color = blue}]{4}
\end{goban}

\begin{goban}
 % Adding lines C and 3. Then removing C3.
 \stones[fill = {color = orange}]{C, 3; C3} % NOTE: C,3 != C3.
\end{goban}
```

**Segments**

Segments are explicitly delimited groups of vertical or horizontal stones. Since they are unidirectional (either vertical or horizontal), one of their coordinates remains constant and does not need to be repeated; only the range of the other variable is specified.

- For horizontal segments, the syntax is `L:LN` or `L:L N`.
- For vertical segments, the syntax is `LN:N` or `L N:N`.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{B2,B3,B4}
 \stones[w]{C2,D2}
\end{goban}

\begin{goban}
 \stones[b]{B2:4}
 \stones[w]{C:D2}
\end{goban}

\begin{goban}
 \stones[b]{B 2:4} % Spaces work between distinct elements.
 \stones[w]{C:D 2}
\end{goban}
```


Here, `B2:4` represents a horizontal segment from B2 to B4, while `C:D2` indicates a horizontal segment from C2 to D2.

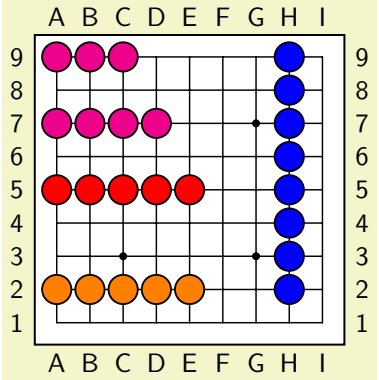


```
\begin{goban}[label = {at = all}]
 \stones[fill = {color = red}]{A:E5}
 \stones[fill = {color = blue}]{H9:2}
 \stones[fill = {color = orange}]{E:A2}
 \stones[fill = {color = magenta}]{A:D7, A:C9} % Can be combined.
\end{goban}
```

**Rectangle: An Artificial Consequence**

The segment syntax allows creating ranges between coordinates to insert stones. I found it useful to extend it to include two ranges, offering a first approximation to rectangles (though it's not my favorite method, here it is). In this case, the syntax is `L:L N:N` or `L:LN:N`.

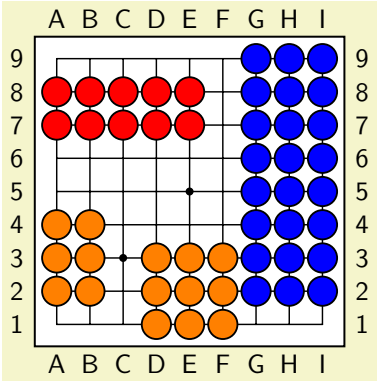


```
\begin{goban}[label = {at = all}]
 \stones[fill = {color = red}]{A:E 7:8} % Space is not mandatory.
 \stones[fill = {color = blue}]{I:G 9:2}
 \stones[fill = {color = orange}]{A:B 2:4, F:D 1:3}
\end{goban}
```

For example, `A:E 7:8` creates a rectangle spanning columns A to E in rows 7 and 8, while `I:G 9:2` descends from I9 to G2. Although functional, this syntax can be less intuitive, leading to more specific operators we'll see later.

### Cartesian Products

In this context, the Cartesian product is a more powerful extension of segments and, at the same time, a generalization of all the notations presented so far. The idea is the following: suppose we want to enter a group of stones on column A: `A1:3, A5, A7:8`. Until now there was no simpler way to write this. But every item repeats the A at the beginning: what if, instead of writing it three times, we write it only once? Something like

`A[1:3, 5, 7:8]`

In this case, the interpreter distributes the A on the left to each of the elements on the right.

The elements of the list on the right do not have to be numbers. Something like `A:D 5:7, A1:2, A3, A:G9` can also be rewritten as


`A[:D 5:7, 1:2, 3, :G9]`

Of course, nobody abstracts that much when entering coordinates, so this is a mere whim. The only restriction on the content between brackets is that brackets cannot be nested.

Just as there is a syntax for letters on the left, there is one for numbers on the right, and it works the same way. The expression `A12, C12, E:G12` can be written as `[A,C,E:G]12`.

There is a third operator, which, yes, is more of a whim than anything else: the unrestricted Cartesian product. I will not dwell on it, because it requires a higher degree of abstraction and has no real human use. This operator is a combination of the previous two: the expression `[A,D:F][2,5,7:9]` is read as

`A2, A5, A7:9, D:F2, D:F5, D:F 7:9.`



```
\begin{goban}
 \stones[b]{[A, D:F][2, 5, 7:9]}
 \marks[b]{A2, A5, A7:9, D:F2, D:F5, D:F 7:9} %<- what the interpreter reads.
\end{goban}
```

The Cartesian product syntax can therefore be used in three different ways:

- `L[itm1, itm2,...]`.

- `[itm1, itm2,...]N`.
- `[itm1,itm2,...][itm3,itm4,...]`.


where brackets cannot be nested.

It can also be combined with some of the operators we will see next to create nodes along paths.

So far, we've covered commands for intersections that cannot be combined with others in the same instruction and therefore **must** be separated by commas. Now, we'll explore commands that can be chained together, offering greater flexibility for complex patterns.

**Horizontal–Vertical and Vertical–Horizontal**

Given two intersections that are neither vertically nor horizontally aligned, these commands generate the intersections connecting the first to the second via a "horizontal–vertical" or "vertical–horizontal" path. This may remind you of the TikZ `-|` operator, from which I borrowed the idea. The syntax is `LN -| LN` (for the first case) or `LN |- LN` (for the second), with or without spaces. These commands, along with the next one, can be chained to form ladders or paths typical of the Manhattan metric.

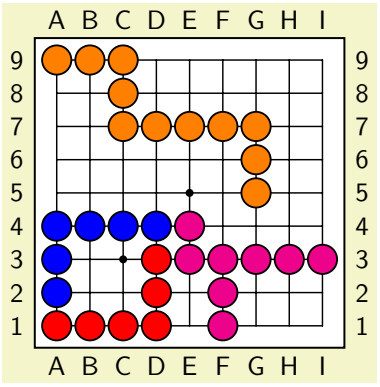



```
\begin{goban}[label = {at = all}]
  \stones[fill = {color = red}]{A1 -| D3}
  \stones[fill = {color = blue}]{D4 -| A2}
  \stones[fill = {color = orange}] {A9 -| C7 -| G5} % Chained.
  \stones[fill = {color = magenta}] {F1 |- I3 -
| E4} % Try to guess.
\end{goban}
```

In this example, `A1 -| D3` goes horizontally from A1 to D1 and then vertically to D3.

**Horizontal or Vertical Line**

Given two intersections aligned vertically or horizontally, this operator connects them with a straight line of stones. Its syntax is `LN -- LN`. It can be chained with the previous two commands to form more elaborate patterns. If the intersections are not aligned, the operator draws nothing (who knows, maybe in the future it will generate ladders ;)).

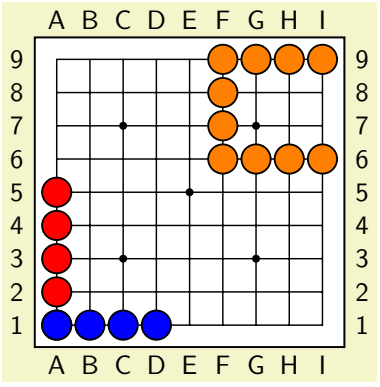


```
\begin{goban}[label = {at = all}]
  \stones[fill = {color = red}]{A1 -- A5}
  \stones[fill = {color = blue}] {A1 -- D1}
  \stones[fill = {color = magenta}] {A6 -- B9} % Doesn't draw because they're not al
  \stones[fill = {color = orange}] {I9 -| F6 -- I6} % Chained.
\end{goban}
```


Here, `A1 -- A5` draws a vertical line, while `I9 -| F6 -- I6` combines a "horizontal–vertical" path with an additional horizontal line.

Beware! `A1 -- D1 -| F3` is a permitted chain, while `A:D1 -| F3` is not, because `:` is not a chain operator. This might change in future versions of the package.

**Filled and Empty Rectangles**

The previous rectangle syntax `L:L N:N` is unintuitive and more of a legacy of bounded segments. Therefore, there are two more direct operators for creating rectangles: `R` and `r`. The difference is that `R` generates a filled rectangle, while `r` only draws its outline. Given two diametrically opposite vertices of the rectangle,


the syntax is `LN R LN` or `LN r LN`. Although spaces are not currently mandatory, I recommend using them for better readability.

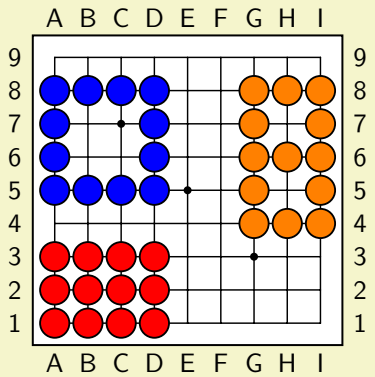


```
\begin{goban}[label = {at = all}]
 \stones[fill = {color = red}]{A1 R D3}
 \stones[fill = {color = blue}] {A5 r D8}
 \stones[fill = {color = orange}] {I8 r G4, H6} % It's alive!
\end{goban}
```

For example, `A1 R D3` fills a rectangle from A1 to D3, while `A5 r D8` draws only the border of a larger rectangle.

Rectangles are also chain operators and can be used as such to create more complex patterns.

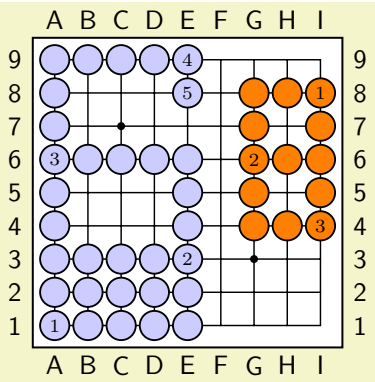



```
\begin{goban}[label = {at = all}]
 \stones[fill = {color = orange}] {I8 r G6 r I4} % You guess.
 \marks[sequence]{I8,G6,I4}
 \stones[fill = {color = blue!20}] {A1 R E3 r A6 |- E9 -- E8} % Wow!
 \marks[sequence]{A1,E3,A6,E9,E8}
\end{goban}
```


In this case, `I8 r G6 r I4` chains two outline rectangles, while `A1 R E3 r A6 |- E9 -- E8` combines a filled rectangle, an outline, a "vertical–horizontal" path, and a line, showcasing the power of chaining.

### 3.5.2 Additive and Subtractive Groups

Suppose we want to draw the following diagram:




This can be achieved with the operators already seen, breaking the pattern into several parts:

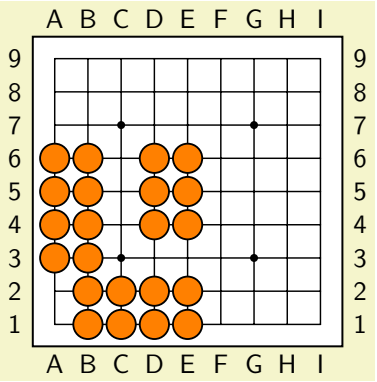


```
\begin{goban}[label = {at = all}]
 \stones[fill = {color = orange}] {A6 R B3, B2 R E1, D4 R E6}
\end{goban}
```

But we could also imagine starting from a complete rectangle from which we've removed the marked stones, offering a more conceptual perspective:



This is what additive and subtractive groups are about. An additive group adds intersections to the list, while a subtractive group removes them. By default, commands always begin processing additive groups, which explains why they draw stones directly. In PGFGO, we can switch between both types using `;`.

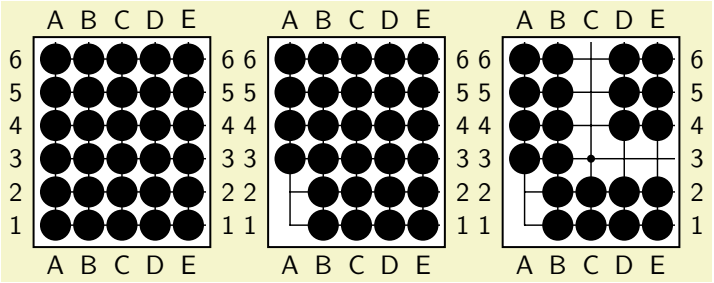


```
\begin{goban}[label = {at = all}, partial = A1:E6]
 \stones[b]{A1 R E6} % Additive group.
\end{goban}

\begin{goban}[label = {at = all}, partial = A1:E6]
 \stones[b]{A1 R E6; A 1:2} % Additive group; subtractive group.
\end{goban}

\begin{goban}[label = {at = all}, partial = A1:E6]
 \stones[b]{A1 R E6; A 1:2, C6 |- E3} % Additive group; subtractive group.
\end{goban}
```

In this sequence, a full rectangle is drawn first (`A1 R E6`), then the horizontal segment `A1:2` is removed, and finally, the path `C6 |- E3` is subtracted. This results in the same diagram as the initial example but with a more compact approach.


The advantage of this system is that it allows adjustments when needed. Sometimes, an additive pattern is ideal except for one or two stones; in those cases, we can remove them with a subtractive group without redesigning everything.

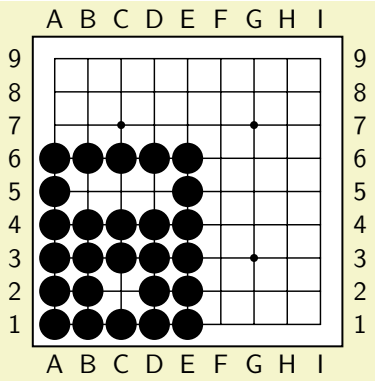

```
\begin{goban}[label = {at = all}]
 \stones[b]{A1 R E6; B:D 5, C2}
\end{goban}
```

Here, `B:D 5` removes a horizontal segment in row 5, and `C2` removes a specific stone, adjusting the initial rectangle.

Note that additive and subtractive groups can be chained, separated by `;`, allowing alternation between adding and removing elements in a single line as many times as desired.

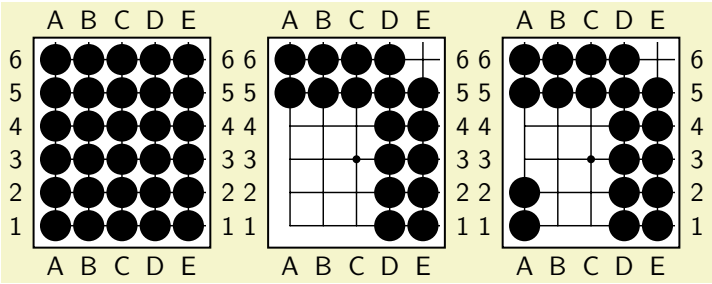

```
\begin{goban}[label = {at = all}, partial = A1:E6]
 \stones[b]{A1 R E6} % AD
\end{goban}

\begin{goban}[label = {at = all}, partial = A1:E6]
 \stones[b]{A1 R E6; A1 R C4, E6} % AD, SU
\end{goban}

\begin{goban}[label = {at = all}, partial = A1:E6]
 \stones[b]{A1 R E6; A1 R C4, E6; A 1:2} % AD, SU, AD
\end{goban}
```

In this last example, a rectangle is created, two regions are removed (`A1 R C4` and `E6`), and then a segment is added (`A 1:2`).

## 3.6 Profiles

Profiles are equivalent to styles in Ti*k*Z. In short, they allow saving a board and stone configuration under a name and recalling it whenever desired.

`\pgfgodefinegoban[`⟨*options*⟩`]{`⟨*goban name*⟩`}{`⟨*goban options*⟩`}`

Allows assigning a name to a group of goban options. It has two optional settings.

`/pgfgo/profiles/goban/from` = ⟨*goban name*⟩ (no default)

Allows defining a goban based on a copy of another.

```
\pgfgodefinegoban[from = gobanA]{gobanB}{...}
```

It's possible to copy itself to add options, though it's not the best alternative.

```
\pgfgodefinegoban[from = gobanB]{gobanB}{...}
```

/pgfgo/profiles/goban/append (no value)

Allows expanding the options of a goban.

```
\pgfgodefinegoban[append]{gobanB}{...}
```

It is equivalent to:

```
\pgfgodefinegoban[from = gobanB]{gobanB}{...}
```

\pgfgodefineplayer[⟨*options*⟩]{⟨*player name*⟩}{⟨*player options*⟩}

Allows assigning a name to a group of stone options. Its options are equivalent to those of `\pgfgodefinegoban`.

/pgfgo/profiles/player/from = ⟨*player name*⟩ (no default)

Defines the player from a copy of another one.


/pgfgo/profiles/player/append (no value)

Extends the options of an already defined player. It is the same as `from =` ⟨*player name*⟩ with its own name.

/pgfgo/profile = ⟨*name*⟩ (no default)

Applies the profile `name`: the goban `name` and the players `name-neutral`, `name-black` and `name-white`. It works in `\pgfgoset`, in the options of a `goban` and in those of a view (p. 63).

Before applying it, the board and the players go back to the initial style (that of the profile `default`): this way a profile does not inherit what it does not define, and a shadow or an image set before is lost. What is not style stays as it was: the size, `partial`, `scale`, where the coordinates go and which they are, `hoshi/at`, the captures and the notes. What comes after the profile is added to it.



```
\pgfgoset{stone = {drop shadow}}
\begin{goban}[3, profile = default]
 \stones[b]{A1, B2}
 \stones[w]{C3}
\end{goban}
```


The goban `name` and the players `name-neutral`, `name-black` and `name-white` must exist. For example, `profile = pgfgo` works because there is a goban called `pgfgo`, and players called `pgfgo-neutral`, `pgfgo-black` and `pgfgo-white`.

/pgfgo/goban profile = ⟨*goban name*⟩ (no default)

Applies only the goban `goban name`, after taking the board back to the initial style.

/pgfgo/players profile = ⟨*name*⟩ (no default)

Applies only the players `name-neutral`, `name-black` and `name-white`, each one after going back to the initial style.




```
\begin{goban}[3, goban profile = pgfgo]
 \stones[b]{A1, B2}
 \stones[w]{C3}
\end{goban}

\begin{goban}[3, players profile = pgfgo]
 \stones[b]{A1, B2}
 \stones[w]{C3}
\end{goban}
```

/pgfgo/players/black/profile = ⟨*player name*⟩ (no default)

Applies the player `player name` to one of the players (`neutral`, `black` or `white`), after taking it back to the initial style. With `all`, the same one to the three of them.

```
\pgfgoset{goban profile = pgfgo, players = {black = {profile = wain-black}}}
```



```
\pgfgodefinegoban{example}{background = {fill = {color = blue!05}}}
\pgfgodefineplayer[from = default-neutral]{example-neutral}
{stone = {
  fill = {color = gray},
  line = {color = magenta!20!black}}
}

\pgfgodefineplayer[from = example-neutral]{example-white}
{stone = {fill = {color = yellow}}}


\pgfgodefineplayer[from = example-neutral]{example-black}
{stone = {fill = {color = blue}}}

\pgfgoset{profile = example}

\begin{goban}[partial = A1:C3]
 \moves{A1:3}
 \stones[b]{B1,B3,C2}
 \stones[w]{C1,C3}
 \stone{B2}
\end{goban}
```

\pgfgodefineprofile[⟨*options*⟩]{⟨*name*⟩}{⟨*profile options*⟩}

Defines at once a whole profile for `profile`: the goban `name` and the players `name-neutral`, `name-black` and `name-white`. It is the same as the example above, in a single command.



```
\pgfgodefineprofile[from = default]{example2}{
 goban = {background = {fill = {color = blue!05}}},
 all = {stone = {line = {color = magenta!20!black}}},
 white = {stone = {fill = {color = yellow}}},
 black = {stone = {fill = {color = blue}}}}

\pgfgoset{profile = example2}

\begin{goban}[partial = A1:C3]
 \moves{A1:3}
 \stones[b]{B1,B3,C2}
 \stones[w]{C1,C3}
 \stone{B2}
\end{goban}
```

/pgfgo/profiles/profile/goban = ⟨*goban options*⟩ (no default)

The options of the goban.

/pgfgo/profiles/profile/all = ⟨*player options*⟩ (no default)

Options of the three players. They go before those of each one.

/pgfgo/profiles/profile/neutral = ⟨*player options*⟩ (no default)

Options of the neutral player.

/pgfgo/profiles/profile/black = ⟨*player options*⟩ (no default)

Options of the black player.

/pgfgo/profiles/profile/white = ⟨*player options*⟩ (no default)

Options of the white player.

/pgfgo/profiles/profile/from = ⟨*profile name*⟩ (no default)

Option of the command: each part starts with that of the profile ⟨*profile name*⟩ (the goban ⟨*profile name*⟩, the player ⟨*profile name*⟩`-neutral`, etc.).

## 3.7 Changing Options on the Fly

When you want to change a board option with `\pgfgoset`, it can be done directly with `\pgfgoset{goban = {...}}`. For players, the situation is slightly different. For this, the following *keys* are available:

`/pgfgo/players` = ⟨*players options*⟩ (no default)

Allows adjusting player options. By default, there are three: `neutral`, `black`, and `white`. Players should not be confused with stone profiles. Once a stone profile is loaded, a change can be made with these *keys*.

Player options can be configured all at once with the *key* `all`, or separately. Changes made here will not affect the profile definitions. That is, if we load the `pgfgo` profile and modify the black player, this won't affect the definition of `pgfgo-black`, but rather the player's own options first.

`/pgfgo/players/all` = ⟨*all player options*⟩ (no default)

Applies the options to the three players.

`/pgfgo/players/neutral` = ⟨*neutral player options*⟩ (no default)


Options of the neutral player (stones without a player).

`/pgfgo/players/black` = ⟨*first player options*⟩ (no default)

Options of the first player.

`/pgfgo/players/white` = ⟨*second player options*⟩ (no default)

Options of the second player.



```
\pgfgoset{players = {
 all = {stone = {line = {color = red}}},
 neutral = {stone = {fill = {color = yellow}}},
 black = {stone = {fill = {color = blue!60!black}}}}}

\begin{goban}[3]
 \stones[b]{A1, B2}
 \stones[w]{C3}
 \stone{A3}
\end{goban}
```


To avoid writing the whole path, there are four commands:

`\pgfgosetplayer{`⟨*player*⟩`}{`⟨*player options*⟩`}`

It is the same as `\pgfgoset{players = {<player> = {<player options>}}}`.

`\pgfgosetallplayers{`⟨*player options*⟩`}`

Applies the options to the three players. It is the same as `\pgfgoset{players = {all = {...}}}`.




```
\pgfgosetallplayers{stone = {radius = 0.3cm}}
\pgfgosetplayer{white}{stone = {fill = {color = orange}}}

\begin{goban}[3]
 \stones[b]{A1, B2}
 \stones[w]{C3}
 \stone{A3}
\end{goban}
```

`\pgfgocopyplayer{`⟨*target player*⟩`}{`⟨*source player*⟩`}`

Copies the current options of `source player` into `target player`.




```
\pgfgocopyplayer{neutral}{white}

\begin{goban}[partial = A1:C3]
 \stone{B2} % Neutral, but it looks like a white stone.
 \stones[b]{A1,C3}
\end{goban}
```

`\pgfgocopyplayers{`⟨*neutral source*⟩`}{`⟨*black source*⟩`}{`⟨*white source*⟩`}`

Copies, in this order, `neutral source` into the neutral player, `black source` into the black one and `white source` into the white one (with `\pgfgocopyplayer`). Since the copies are made one after the other, it cannot be used to swap players.



```
\pgfgocopyplayers{neutral}{white}{black}
% It does not swap them: both are white.

\begin{goban}[3]
 \stones[b]{A1, B2}
 \stones[w]{C3}
\end{goban}
```

Each player has access to the same key tree. For this reason, the following, although they mention `white`, apply to all players. Each is explained in the section corresponding to the object type, but they are briefly illustrated here.

`/pgfgo/players/white/stone =` ⟨*stone options*⟩ (no default)


Controls the options for the second player's stones.

`/pgfgo/players/white/stone/line =`⟨*stone line options*⟩ (default `true`)

Controls the options for the borders of the second player's stones.

`/pgfgo/players/white/stone/line/true` (no value)

Determines whether the stone's border appears or not.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}


\pgfgoset{players = {white = {stone = {line = true}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

`/pgfgo/players/white/stone/line/false` (no value)

`/pgfgo/players/white/stone/line/width =` ⟨*dimension*⟩ (no default)

Determines the thickness of the stone's border.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {line = {true, width = 1pt}}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/line/color = ⟨*color*⟩ (no default)

Determines the color of the stone's border.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {line = {true, width = 1pt, color = red}}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/line/opacity = ⟨*float*⟩ (no default)

Determines the opacity of the stone's border.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {line = {true, width = 2pt, opacity = 0.25}}}}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/fill =⟨*stone fill options*⟩ (default `true`)

Controls options related to the stone's fill.

/pgfgo/players/white/stone/fill/true (no value)

/pgfgo/players/white/stone/fill/false (no value)




```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {fill = false}}}}
% What's visible in the figure is what remains of the stone: shadows and highlights.

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/fill/color = ⟨*color*⟩ (no default)



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {fill = {color = magenta!20}}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/fill/opacity = ⟨*float*⟩ (no default)

Sets the opacity of the stone's fill.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {fill = {opacity = 0.5}}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/radius = ⟨*dimension*⟩ (no default)

Sets the stone's radius.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {radius = 0.3cm}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/scale = ⟨*float*⟩ (no default)

Controls the stone's scale, which also affects markings.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {scale = 1.25}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w, mark = circle]{A3}
\end{goban}
```

/pgfgo/players/white/stone/drop shadow =⟨*stone drop shadow options*⟩ (default `true`)


Controls options specific to shadows on stones.

/pgfgo/players/white/stone/drop shadow/true (no value)

Enables the shadow on the stone.

/pgfgo/players/white/stone/drop shadow/false (no value)

Disables the shadow on the stone.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {drop shadow = false}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/drop shadow/angle = ⟨*float*⟩ (no default)

Sets the shadow's angle.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {drop shadow = {angle = 225}}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/drop shadow/offset = ⟨*dimension*⟩ (no default)

Sets the shadow's offset from the center.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {drop shadow = {offset = 0.125cm}}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/drop shadow/opacity = ⟨*float*⟩ (no default)

Controls the shadow's opacity.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {stone = {drop shadow = {offset = 0.125cm, opacity = 0.1}}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/drop shadow/color = ⟨*color*⟩ (no default, initially `black`)

The color of the shadow.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}
\pgfgoset{players = {white = {stone = {drop shadow = {color = blue, offset = 0.1cm}}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/shine =⟨*stone shine options*⟩ (default `true`)


Controls the shine of the stones, drawn on top of the stone, whether it is a circle or an image.

/pgfgo/players/white/stone/shine/true (no value)

Draws the shine.

/pgfgo/players/white/stone/shine/false (no value)

Does not draw the shine.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {black = {stone = {shine = false}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/shine/angle = ⟨*float*⟩ (no default, initially 0)

Turns the drawn shine. With 0, the light comes from the upper left.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {black = {stone = {shine = {angle = 45}}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/shine/opacity = ⟨*float*⟩ (no default, initially 1)

Controls the opacity of the shine (also of a shine with an image).



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {black = {stone = {shine = {opacity = 0.5}}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/shine/color = ⟨*color*⟩ (no default, initially gray!50!white)

Controls the color of the drawn shine.




```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}
\pgfgoset{players = {black = {stone = {shine = {color = red}}}}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}
```

/pgfgo/players/white/stone/shine/image = ⟨*options*⟩ (no default)

A shine of your own: an image with transparency (PNG or PDF), centered on the stone, instead of the drawn shine. It does not turn with the image of the stone (`stone/image/rotate`), so the light always stays on the same side. Each file is stored only once in the PDF.



```
\pgfgoset{players = {white = {stone = {
 image = {file = stone-white.png, rotate = random},
 shine = {true, image = {file = shine.png}}}}}}

\begin{goban}[5, partial = B2:D4]
 \stones[w]{B2, C2, D2, B3, C3, D3}
\end{goban}
```

/pgfgo/players/white/stone/shine/image/file = ⟨*file*⟩ (no default)


The file of the image. It is looked up as with `\includegraphics`.

/pgfgo/players/white/stone/shine/image/width = ⟨*dimension*⟩ (no default, initially `the diameter of the stone`)

The width of the image; the height keeps the proportions.

/pgfgo/players/white/stone/shine/image/rotate = ⟨*angle*⟩ (no default, initially 0)

Turns the image of the shine, the same on every stone.



```
\pgfgoset{players = {white = {stone = {
 image = {file = stone-white.png},
 shine = {true, image = {file = shine.png, width = 0.3cm, rotate = 90}}}}}}


\begin{goban}[5, partial = B2:D4]
 \stones[w]{B2, C2, D2, B3, C3, D3}
\end{goban}
```

/pgfgo/players/white/stone/shine/image/false (style, no value)

Removes the image: the drawn shine is back.

/pgfgo/players/white/stone/prisoner = ⟨*stone options*⟩ (no default)

The style of the player's prisoners: those of `\prisoner`, `\prisoners` and the *key* `prisoner` of `\stone` and `\stones`, and the stones captured with `captures = fade`. It is applied after the fill opacity 0.5 and `/pgfgo/prisoner`, and before the options of the stone. The other stones of the player do not change.



```
\pgfgoset{goban = {5, partial = B2:D4}}
\pgfgoset{players = {white = {stone = {prisoner = {line = {color = red}}}}}}


\begin{goban}
 \stones[w]{B3}
 \prisoner[b]{C3}
 \prisoner[w]{D3}
\end{goban}
```

/pgfgo/players/white/move = ⟨*move options*⟩ (no default)

Controls the options of the player's moves.

/pgfgo/players/white/move/label = ⟨*move label options*⟩ (no default)

Controls the labels (the numbers) of their moves.




```
\pgfgoset{players = {white = {move = {label = {
 color = red, font = \itshape, font size = 6pt, opacity = 0.6}}}}}

\begin{goban}[3]
 \moves*{A1, B2, C3, A3}
\end{goban}
```

/pgfgo/players/white/move/label/font = ⟨*font commands*⟩ (no default, initially `\bfseries`)

Font of the numbers.

/pgfgo/players/white/move/label/font size = ⟨*dimension*⟩ (no default)

Size of the numbers. If it is not set, it adapts to the number of digits.

/pgfgo/players/white/move/label/color = ⟨*color*⟩ (no default)


Color of the numbers.

/pgfgo/players/white/move/label/opacity = ⟨*float*⟩ (no default, initially `1`)

Opacity of the numbers.

/pgfgo/players/white/move/label/format = ⟨*format*⟩ (no default)

Format of the numbers: `arabic`, `alph`, `Alph`, `roman` or `Roman`.




```
\pgfgoset{players = {
 black = {move = {label = {format = Roman}}},
 white = {move = {label = {format = alph}}}}}

\begin{goban}[3]
 \moves*{A1, B2, C3, A3}
\end{goban}
```

/pgfgo/players/white/move/label/format/arabic (no value)

Arabic numerals (1, 2, 3).

/pgfgo/players/white/move/label/format/alph (no value)

Lowercase letters (a, b, c).

/pgfgo/players/white/move/label/format/Alph (no value)

Uppercase letters (A, B, C).

/pgfgo/players/white/move/label/format/roman (no value)

Lowercase Roman numerals (i, ii, iii).

/pgfgo/players/white/move/label/format/Roman (no value)

Uppercase Roman numerals (I, II, III).

/pgfgo/players/white/move/label/forget (no value)

The numbers of their moves are forgotten, as with `/pgfgo/move/label/forget`: `resume` brings them without number.

/pgfgo/players/white/mark = ⟨*mark options*⟩ (no default)


Controls the style of the player's marks. The shape (`triangle`, `custom`, …) is not part of the style: it goes in the options of each mark (as in `\marks[w, custom = {?}]{A3}`) or in `/pgfgo/mark`. Inside `\pgfgoset{players = ...}` it raises an error.

/pgfgo/players/white/mark/line = ⟨*mark line options*⟩ (no default)

Controls the line of their marks.

/pgfgo/players/white/mark/line/color = ⟨*color*⟩ (no default)

Controls the line color of markings.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}


\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {mark = {line = {color = red!80!black}}}}}

\begin{goban}
 \stones[b] {B1}
 \stone [b, mark] {C2}
 \stone [w, mark = circle] {A3}
 \mark  [w, circle] {A2}
\end{goban}
```

/pgfgo/players/white/mark/line/width = ⟨*dimension*⟩ (no default)

Controls the line thickness of markings.



```
\pgfgoset{profile = pgfgosmooth}
\pgfgoset{goban = {partial = A1:C3}}

\begin{goban}
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\pgfgoset{players = {white = {mark = {line = {width = 0.3pt}}}}}

\begin{goban}
 \stones[b] {B1}
 \stone [b, mark] {C2}
 \stone [w, mark = circle] {A3}
 \mark  [w, circle] {A2}
\end{goban}
```

/pgfgo/players/white/mark/line/opacity = ⟨*float*⟩ (no default, initially `1`)

Opacity of the line of the marks.

/pgfgo/players/white/mark/fill =⟨*mark fill options*⟩ (default `true`)

Controls the fill of their filled marks (`filled square`, `filled circle` and `hatched lines`) and the color `pgfgomarkfill` of custom marks (p. 96).

/pgfgo/players/white/mark/fill/true (no value)

Filled marks are filled with `fill/color`. It is the initial value.

/pgfgo/players/white/mark/fill/false (no value)


Filled marks are not filled: they are not seen.

/pgfgo/players/white/mark/fill/color = ⟨*color*⟩ (no default, initially `gray`)

Fill color of the marks.

/pgfgo/players/white/mark/fill/opacity = ⟨*float*⟩ (no default, initially `1`)

Opacity of the fill of the marks.




```
\pgfgoset{players = {white = {mark = {
 fill = {color = red, opacity = 0.5},
 line = {opacity = 0.3}}}}}

\begin{goban}[3]
 \stones[w]{A1}
 \marks[w, filled square]{A1, B2}
 \marks[w, triangle]{C3, A3}
\end{goban}
```

/pgfgo/players/white/mark/scale = ⟨*float*⟩ (no default, initially 1)

Size of their marks compared with the usual one (the shapes and the text).




```
\pgfgoset{players = {white = {mark = {scale = 1.5}}}}

\begin{goban}[3]
 \stones[w]{A1}
 \stones[b]{C1}
 \marks[w, circle]{A1, B2}
 \marks[b, circle]{C1}
 \marks[circle]{C3}
\end{goban}
```

/pgfgo/players/white/mark/label = ⟨*mark label options*⟩ (no default)

Controls label options for markings that have them (`sequence` and `custom`).




```
\pgfgoset{players = {white = {mark = {label = {
 color = red, font = \itshape, font size = 6pt}}}}}

\begin{goban}[3]
 \stones[w]{A1}
 \marks[w, sequence]{A1, B2, C3}
 \marks[w, custom = {?}]{A3}
\end{goban}
```

/pgfgo/players/white/mark/label/color = ⟨*color*⟩ (no default)

Color of the labels of their marks.

/pgfgo/players/white/mark/label/font = ⟨*font commands*⟩ (no default)

Font of the labels of their marks.

/pgfgo/players/white/mark/label/font size = ⟨*dimension*⟩ (no default)

Size of the labels. If it is not set, it adapts to the number of characters.

/pgfgo/players/white/mark/label/format = ⟨*format*⟩ (no default)

Format of the numbers of `sequence`: `arabic`, `alph`, `Alph`, `roman` or `Roman`.

/pgfgo/players/white/mark/label/format/arabic (no value)

Arabic numerals (1, 2, 3).

/pgfgo/players/white/mark/label/format/alph (no value)

Lowercase letters (a, b, c).

/pgfgo/players/white/mark/label/format/Alph (no value)

Uppercase letters (A, B, C).

/pgfgo/players/white/mark/label/format/roman (no value)


Lowercase Roman numerals (i, ii, iii).

/pgfgo/players/white/mark/label/format/Roman (no value)

Uppercase Roman numerals (I, II, III).

/pgfgo/players/white/mark/sequence =⟨*mark sequence options*⟩ (default `from = 1`)

Numbers their marks in order.




```
\pgfgoset{players = {white = {mark = {sequence = {from = 4, format = roman}}}}}

\begin{goban}[3]
 \stones[w]{A1}
 \marks[w]{A1, B2, C3}
 \marks[sequence]{A3, C1}
\end{goban}
```

/pgfgo/players/white/mark/sequence/true (no value)

Turns the sequence on.

/pgfgo/players/white/mark/sequence/false (no value)

Turns the sequence off.

/pgfgo/players/white/mark/sequence/from = ⟨*number*⟩ (no default)

Turns the sequence on and starts it at ⟨*number*⟩.

/pgfgo/players/white/mark/sequence/format = ⟨*format*⟩ (no default)


Turns the sequence on and chooses the number format (the same as `label/format`).

# 4 The Board

When we refer to the "board," we mean an environment or *scope* in which both the goban (the game grid) and its contents—stones, coordinate labels, and other relevant information—are rendered. This environment is designed to be flexible and customizable, allowing users to adapt its appearance and functionality according to the needs of the diagram, whether to represent full games, specific sections, or even add visual annotations.


```
\begin{goban}[⟨options⟩]
  ⟨environment contents⟩
\end{goban}
```

Initializes the goban environment. By default, it draws a square 9×9 intersection board with a visible border, white background, and no labels on the sides.



```
\begin{goban}
\end{goban}
```

Since the board is the only macro that utilizes the TikZ layer, each intersection can be accessed using its alphanumeric coordinate (as in PGF) or numeric values in the Ti*k*Z coordinate system. This allows combining Go's intuitive syntax with TikZ's graphical capabilities, which is especially useful for adding custom elements, such as arrows or marks, directly onto the board.

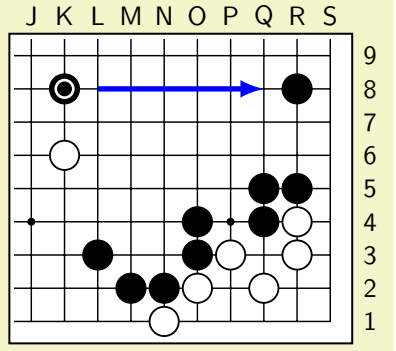



```
\begin{goban}[19, partial = J1:S9,
 label = {at = {north, east}}]
 \stones[b] {K8,R8,Q5,R5,O4,Q4,L3,O3,M2,N2}
 \mark[black, circle] {K8}
 \stones[white] {K6,R4,R3,P3,N1,O2,Q2}

 \tikzset{flecha/.style = {-{latex[]}, line width = 2pt, blue}}
 \draw[flecha] (12,8)--(17,8);
\end{goban}
```

/pgfgo/goban/use i=⟨*boolean*⟩ (default `true`, initially `true`)

Enables or disables the use of the letter "I" in the board's coordinates and labels. When disabled ("false"), any reference to "I" is interpreted as "J".




```
\pgfgoset{goban = {13, label = {at = north}}}


\begin{goban}[label = {at = west}, partial = H1:M3]
 \stone[b]{J2}
\end{goban}

\begin{goban}[use i = false, partial = H1:N3]
 \stone[b]{J2}
\end{goban}

\begin{goban}[use i = false, label = {at = east}, partial = H1:N3]
 \stone[white, mark = {custom = !}] {I2} % If it's I, it shifts to J.
\end{goban}
```

/pgfgo/goban/size=⟨*nlines or nlines* x *nlines*⟩ (no default, initially 9)

Defines the number of vertical and horizontal lines on the board. The word "size" can be omitted, and the value specified directly. If a single integer (e.g., 9) is provided, the board will be square (9×9). If an expression like 5x3 is used, a rectangular board with 5 columns and 3 rows will be created.



```
\begin{goban}[5]
\end{goban}

\begin{goban}[5x3]
\end{goban}
```

/pgfgo/goban/sgf view=⟨*file*⟩ (no default)

Like `sgf size` and, if the file has a view (`VW`), it only shows that part of the board, like `partial`. The view can change during the game; the one of move `sgf view move` is used.


/pgfgo/goban/sgf view move=⟨*number*⟩ (no default, initially 0)

The move whose view `sgf view` uses. A `VW` holds from the move of its node (or from the next one, if the node has no move) until the next `VW`, and `VW[]` shows the whole board again. With 0, it is the view at the start. It can go before or after `sgf view`. `\sgfdiagrams`, `\sgfanimation` and `\sgfproblem` choose the view by themselves.

```
\begin{goban}[sgf view = game.sgf, sgf view move = 120]
 \sgf[from = 101, to = 120]{game.sgf}
\end{goban}
```

/pgfgo/goban/sgf size=⟨*file*⟩ (no default)


Takes the size of the board from an SGF game (its `SZ` property). Only with the Lua kernel (p. 13).




```
\begin{goban}[sgf size = variations.sgf, label = {at = {north, west}}]
 \sgf{variations.sgf}
\end{goban}
```

/pgfgo/goban/scale=⟨*float*⟩ (no default, initially 1)

Controls the global scale of the board, affecting both its overall dimensions and the thickness of certain elements (e.g., the "line width" of the lines).



```
\begin{goban}[2, scale = 2]
 \stone[b, mark]{A1}
\end{goban}

\begin{goban}[2, scale = 1]
 \stone[b, mark]{A1}
\end{goban}

\begin{goban}[2, scale = 0.5]
 \stone[b, mark]{A1}
\end{goban}
```

## 4.1 Grid

The grid refers to the central lines that form the board's intersections.

/pgfgo/goban/grid=⟨*options*⟩ (default `true`)


Controls the behavior and appearance of the board's central lines. This set of options allows modifying their visibility, color, thickness, and spacing, offering a high degree of customization.

/pgfgo/goban/grid/true (style, no value)

Turns the central lines back on after a `grid = false` (for example, a global one set with `\pgfgoset`).

/pgfgo/goban/grid/false (style, no value)

Disables the central lines, leaving only the border and stones visible.



```
\begin{goban}[3]
 \stone[b]{A1}
 \stone[w]{B2}
\end{goban}

\begin{goban}[3, grid = false]
 \stone[b]{A1}
 \stone[w]{B2}
\end{goban}
```

The first board shows the default grid.

/pgfgo/goban/grid/line=⟨*options*⟩ (default `true`)


Allows controlling the grid lines.

/pgfgo/goban/grid/line/true (style, no value)

Draws the lines. It is the initial value.

/pgfgo/goban/grid/line/false (style, no value)


Does not draw the lines, but draws the star points (unlike `grid = false`).



```
\begin{goban}[9, grid = {line = false}, hoshi = {radius = 2pt}]
 \stones[b]{C3, E5}
\end{goban}
```

/pgfgo/goban/grid/line/color =⟨*color*⟩ (no default, initially `black`)

Allows changing the color of the grid lines.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[grid = {line = {color = blue}}, name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[grid = {line = {color = red}}, resume = a]
\end{goban}
```

/pgfgo/goban/grid/line/opacity =⟨*float*⟩ (no default, initially `1`)

Sets the opacity of the grid lines, from 0 (transparent) to 1 (opaque).




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[grid = {line = {opacity = 0.2}}, resume = a]
\end{goban}
```

/pgfgo/goban/grid/line/width =⟨*dimension*⟩ (no default, initially `0.55pt`)

Defines the thickness of the grid lines.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[grid = {line = {width = 1.5pt}}, resume = a]
\end{goban}
```

/pgfgo/goban/grid/x sep =⟨*dimension*⟩ (no default, initially `1.25em`)


Sets the spacing between vertical lines, adjusting the width of the board's columns.

/pgfgo/goban/grid/y sep =⟨*dimension*⟩ (no default, initially `1.25em`)

Sets the spacing between horizontal lines, adjusting the height of the rows.

/pgfgo/goban/grid/sep =⟨*dimension*⟩ (no default, initially `1.25em`)

Simultaneously defines the vertical and horizontal spacing of the lines, ensuring uniform spacing in both directions. This is a convenient option for maintaining balanced proportions.




```
\begin{goban}[5, grid = {x sep = 1.8em}]
 \stones[b]{B2, C3}
 \stone[w]{D3}
\end{goban}

\begin{goban}[5, grid = {sep = 0.9em}]
 \stones[b]{B2, C3}
 \stone[w]{D3}
\end{goban}
```

/pgfgo/goban/grid/image =⟨*options*⟩ (no default)

Draws an image instead of the lines of the grid, with the opacity of `grid/line/opacity`. With `partial`, the corresponding part is shown. The star points are still drawn (see `hoshi`).

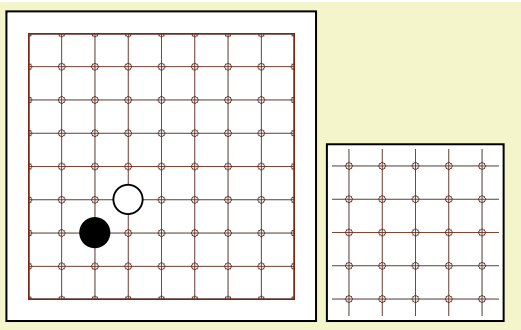

```
\begin{goban}[9, grid = {image = {file = grid.png}}, hoshi = false]
 \stones[b]{C3}\stone[w]{D4}
\end{goban}


\begin{goban}[9, grid = {image = {file = grid.png}}, hoshi = false, partial = C3:G7]
\end{goban}
```

/pgfgo/goban/grid/image/file =⟨*file*⟩ (no default)

The image file.

/pgfgo/goban/grid/image/fit =⟨*stretch or tile*⟩ (no default, initially `stretch`)


With `stretch`, the image is stretched from A1 to the opposite corner of the whole board, so the outer lines must be on the edges of the image. With `tile`, it is drawn once on each square of the grid (between four intersections), stretched to the size of the square: the image of one square builds the whole board.



```
\begin{goban}[9, grid = {image = {file = cell.png, fit = tile}}, hoshi = false]
 \stones[b]{C3}\stone[w]{D4}
\end{goban}
```

/pgfgo/goban/grid/image/tiles =⟨*columns*⟩x⟨*rows*⟩ (no default, initially `one per square`)

With `fit = tile`, the mesh in which the image is repeated, over the area from A1 to the opposite corner of the whole board; each image is stretched to the size of its cell. A single number is used for both directions. Without this key, there is one image per square.



```
\begin{goban}[9, grid = {image = {file = cell.png, fit = tile, tiles = 4}}, hoshi = false]
\end{goban}
```

/pgfgo/goban/grid/image/rotate =⟨*angle*⟩, `random` or ⟨*min*⟩:⟨*max*⟩ (no default, initially `0`)

Turns the image, like `background/fill/image/rotate`: in quarter turns and, with `random` or a range, each tile with its own.

/pgfgo/goban/grid/image/false (style, no value)


Removes the image: the lines come back.

## 4.2 Star Points

The star points (*hoshi*) are drawn on the grid, in its color. By default they are the usual ones: on each side, the fourth line from the edge (the third on boards with fewer than 13 lines); the center if the size is odd; and, from 15 lines on, the middle of the sides. A 19 board has nine, and a 13 or 9 board, five. Boards with fewer than 7 lines have none. Stones cover them.

/pgfgo/goban/hoshi=⟨*options*⟩ (default `true`)

Options of the star points.

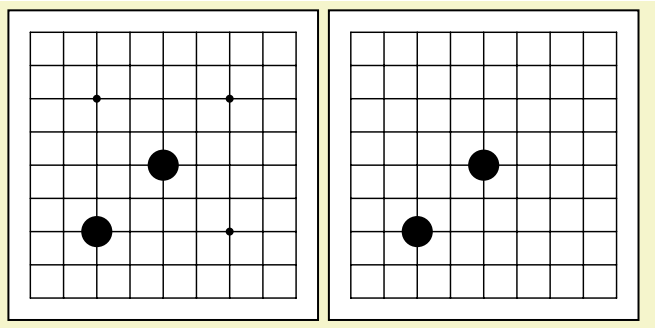

```
\begin{goban}[9]
 \stones[b]{C3, E5}
\end{goban}

\begin{goban}[9, hoshi = false]
 \stones[b]{C3, E5}
\end{goban}
```

/pgfgo/goban/hoshi/true (style, no value)

Draws the star points. It is the initial value.

/pgfgo/goban/hoshi/false (style, no value)


Does not draw the star points.

/pgfgo/goban/hoshi/radius=⟨*dimension*⟩ (no default, initially `1.5pt`)

Radius of the points.

/pgfgo/goban/hoshi/color=⟨*color*⟩ (no default)


Color of the points. Without this *key*, they take the color of the grid.



```
\begin{goban}[9, hoshi = {radius = 2.5pt, color = red}]
\end{goban}
```

/pgfgo/goban/hoshi/opacity=⟨*float*⟩ (no default)


Opacity of the points (also of their image). Without this *key*, they take the opacity of the grid.



```
\begin{goban}[9, hoshi = {radius = 3pt, opacity = 0.3}]
 \stones[b]{C3}
\end{goban}
```

/pgfgo/goban/hoshi/at=⟨*coordinates*⟩ (no default)


Chooses the points, with the same syntax as `\stones`. Empty, the usual ones are used.



```
\begin{goban}[9, hoshi = {at = {C3, G7}}]
\end{goban}
```

/pgfgo/goban/hoshi/image=⟨*options*⟩ (no default)

Draws an image on each star point instead of the circle.



```
\begin{goban}[9, hoshi = {image = {file = hoshi.png}, radius = 3pt}]
\end{goban}
```

/pgfgo/goban/hoshi/image/file=⟨*file*⟩ (no default)


The image file.

/pgfgo/goban/hoshi/image/width=⟨*dimension*⟩ (no default, initially 2× `radius`)

The width of the image; the height keeps the proportions.

/pgfgo/goban/hoshi/image/rotate=⟨*angle*⟩, `random` or ⟨*min*⟩:⟨*max*⟩ (no default, initially `0`)

Turns the image, like `stone/image/rotate` (p. 69): with `random` or a range, each point gets a different angle, always the same.

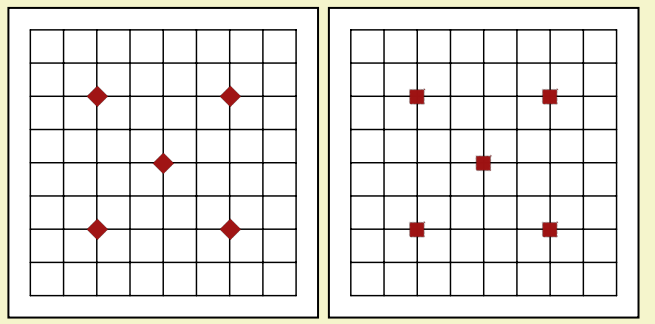

```
\begin{goban}[9, hoshi = {image = {file = hoshi.png, width = 8pt}}]
\end{goban}

\begin{goban}[9, hoshi = {image = {file = hoshi.png, width = 8pt, rotate = 45}}]
\end{goban}
```

/pgfgo/goban/hoshi/image/false (style, no value)

Removes the image: the circles come back.

## 4.3 Border

The board's border is the outline that frames the grid and stones, providing a clear visual boundary. By default, it is active, has a white background, and a black outline.

/pgfgo/goban/background=⟨*options*⟩ (default `true`)


Controls the properties of the board's border, such as its visibility, color, thickness, and shape, allowing detailed customization.

/pgfgo/goban/background/true (style, no value)

Turns the board's background and border back on after a `background = false`.

/pgfgo/goban/background/false (style, no value)

Completely disables the board's border, removing both the outline and fill. This is useful for minimalist diagrams or when the document's background already provides sufficient contrast.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}


\begin{goban}[background = false, resume = a]
\end{goban}
```

/pgfgo/goban/background/fill=⟨*options*⟩ (default `true`)

Controls options related to the board's background fill.

/pgfgo/goban/background/fill=⟨*boolean*⟩ (no default, initially `true`)

Determines whether the board's background fill is active. If disabled, the area inside the border will be transparent, showing only the outline (if enabled).




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[background = {line = {color = red}}, name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[background = {line = false}, resume = a]
\end{goban}
```

/pgfgo/goban/background/fill/color =⟨*color*⟩ (no default, initially `white`)

Defines the fill color of the board.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[background = {fill = {color = orange!40}}, name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[background = {fill = {color = olive!30}}, resume = a]
\end{goban}
```

/pgfgo/goban/background/fill/opacity =⟨*float*⟩ (no default, initially `1`)

Controls the opacity of the fill, from 0 (transparent) to 1 (opaque).




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[background = {fill = {color = orange!40}}, name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[background = {fill = {color = orange!40}, fill = {opacity = 0.5}}, resume
= a]
\end{goban}
```

/pgfgo/goban/background/fill/image =⟨*options*⟩ (no default)

A background image (for example, the wood of a board), over the fill color and with its opacity. The image is placed according to the whole board: with `partial`, the corresponding part is shown, clipped by the border and its rounded corners. Marks on empty points, which cover the grid with the color of the background, show the part of the image under them, and so does the `dim` mark. The halo of arrows and lines keeps the color of the background.

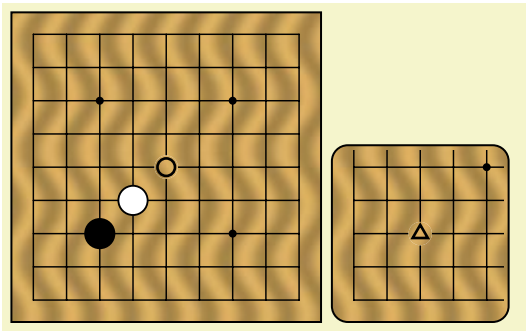

```
\begin{goban}[9, background = {fill = {image = {file = wood.jpg}}}]
 \stones[b]{C3}\stone[w]{D4}
 \marks[circle]{E5, C3}
\end{goban}


\begin{goban}[9, background = {fill = {image = {file = wood.jpg}}, rounded corners = 6pt}, partial
= A1:E5]
 \marks[triangle]{C3}
\end{goban}
```

/pgfgo/goban/background/fill/image/file =⟨*file*⟩ (no default)

The file of the background image.

/pgfgo/goban/background/fill/image/fit =⟨*stretch, cover or tile*⟩ (no default, initially `cover`)

How the image fills the background of the whole board. `stretch` stretches it to fill the whole background, without keeping the proportions. `cover` scales it, keeping the proportions, until it covers the background, centered: what is left over is not shown. `tile` repeats it as tiles, from a corner, a side or the center of the whole board (see `anchor`).

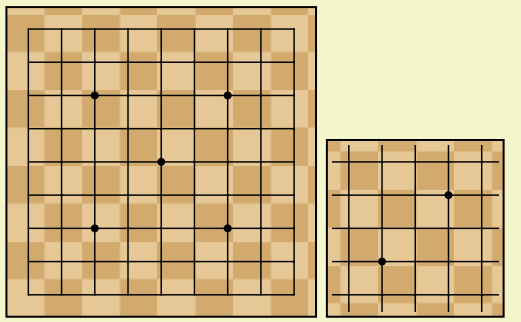


```
\begin{goban}[9, background = {fill = {image = {file = tile.png, fit = tile, width = 1cm}}}]
\end{goban}

\begin{goban}[9, background = {fill = {image = {file = tile.png, fit = tile, width = 1cm}}}, partial
= D4:H8]
\end{goban}
```

/pgfgo/goban/background/fill/image/anchor =⟨*position*⟩ (no default, initially `south west`)

With `fit = tile`, where the tiles start, on the background of the whole board. With a corner (`south west`, `south east`, `north west` or `north east`), that corner gets a whole tile. With a side (`north`, `south`, `east` or `west`), the first tile touches that side, centered along it. With `center`, a tile is in the center of the board.



```
\begin{goban}[5, background = {fill = {image = {file = tile.png, fit = tile, width = 1cm, anchor = north east}}}]
\end{goban}


\begin{goban}[5, background = {fill = {image = {file = tile.png, fit = tile, width = 1cm, anchor = north}}}]
\end{goban}
```

/pgfgo/goban/background/fill/image/width =⟨*dimension*⟩ (no default, initially `the natural width`)

With `fit = tile`, the width of each tile; the height keeps the proportions.

/pgfgo/goban/background/fill/image/tiles =⟨*columns*⟩x⟨*rows*⟩ (no default)


With `fit = tile`, instead of tiles of width `width` from `anchor`, splits the background of the whole board into that mesh and puts the image on each cell, stretched to its size. A single number is used for both directions.



```
\begin{goban}[9, background = {fill = {image = {file = cell.png, fit = tile, tiles = 3x3}}}]
\end{goban}
```

/pgfgo/goban/background/fill/image/rotate =⟨*angle*⟩, `random` or ⟨*min*⟩:⟨*max*⟩ (no default, initially `0`)

Turns the image in quarter turns: the angle is rounded to 0, 90, 180 or 270 degrees, so that the turned image still fills its place without gaps. With 90 or 270, the width and the height are swapped: with `cover` the image keeps its proportions, but a tile of width `width` that is not square is stretched. With `random` or a range, as in `stone/image/rotate` (p. 69), each tile has its own turn, always the same: the repetition shows less.



```
\begin{goban}[5, background = {fill = {image = {file = wood.jpg, rotate = 90}}}]
\end{goban}

\begin{goban}[5, background = {fill = {image = {file = wood.jpg, fit = tile, width = 1cm, rotate = random}}}]
\end{goban}
```

/pgfgo/goban/background/fill/image/false (style, no value)


Removes the background image.

/pgfgo/goban/background/line=⟨*options*⟩ (default `true`)

Controls the options for the background's outline.

/pgfgo/goban/background/line=⟨*boolean*⟩ (no default, initially `true`)

Enables or disables the border line.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[background = {line = {color = red}}, name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[background = {line = false}, resume = a]
\end{goban}
```

/pgfgo/goban/background/line/color =⟨*color*⟩ (no default, initially `black`)

Defines the color of the border line, allowing it to stand out from the background or grid lines.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[background = {line = {color = red}}, name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[background = {line = {color = blue}}, resume = a]
\end{goban}
```

/pgfgo/goban/background/line/opacity =⟨*float*⟩ (no default, initially `1`)

Adjusts the opacity of the border line.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[background = {line = {color = red}}, name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[background = {line = {color = red}, line = {opacity = 0.5}}, resume
= a]
\end{goban}
```

/pgfgo/goban/background/line/width =⟨*dimension*⟩ (no default, initially `0.75pt`)

Controls the thickness of the border line.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[background = {line = {width = 1.5pt}}, resume = a]
\end{goban}
```

/pgfgo/goban/background/rounded corners =⟨*dimension*⟩ (no default, initially `0pt`)

Adjusts the rounding of the border corners, from 0pt (straight corners) to larger values for a smoother, more stylized effect.




```
\pgfgoset{goban = {5, partial = A1:C3}}

\begin{goban}[name = a]
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\begin{goban}[background = {rounded corners = 10pt}, resume = a]
\end{goban}
```

/pgfgo/goban/background/rounded corners/outer =⟨*dimension*⟩ (no default, initially `0pt`)

Adjusts only the rounding of the outer corners of the border.




```
\pgfgoset{goban = {5, partial = A1:C3}}

\begin{goban}[background = {rounded corners = 0pt}, name = a]
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\begin{goban}[background = {rounded corners = {outer = 10pt}}, resume = a]
\end{goban}
```

/pgfgo/goban/background/rounded corners/inner =⟨*dimension*⟩ (no default, initially `0pt`)

Adjusts only the rounding of the inner corners of the board (only visible on partial boards).




```
\pgfgoset{goban = {5, partial = A1:C3}}

\begin{goban}[background = {rounded corners = 0pt}, name = a]
 \stones[b]{B1,C2}
 \stone[w]{A3}
\end{goban}

\begin{goban}[background = {rounded corners = {outer = 8pt, inner = 2pt}}, resume
= a]
\end{goban}
```

/pgfgo/goban/background/sep =⟨*dimension*⟩ (no default, initially `0.825em`)

Defines the separation between the grid and the border, based by default on the stone radius multiplied by 1.5. This adjustment ensures that stones near the border do not overlap with it.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[background = {sep = 0.625em}, name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[background = {sep = 1.5em}, resume = a]
\end{goban}
```

/pgfgo/goban/background/drop shadow=⟨*options*⟩ (default `true`)

Draws a shadow under the board. Without a value, it turns it on.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[background = {drop shadow}, name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}


\begin{goban}[background = {drop shadow = {color = blue, opacity = 0.3}}, resume
= a]
\end{goban}
```

/pgfgo/goban/background/drop shadow=⟨*boolean*⟩ (no default, initially `false`)

Turns the shadow on (`true`) or off (`false`).

/pgfgo/goban/background/drop shadow/angle =⟨*float*⟩ (no default, initially `-45`)

Direction of the shadow, in degrees.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[background = {drop shadow}, name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[background = {drop shadow = {angle = 45}}, resume = a]
\end{goban}
```

/pgfgo/goban/background/drop shadow/offset =⟨*dimension*⟩ (no default, initially `1.5pt`)

Distance between the board and its shadow.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[background = {drop shadow}, name = a]
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}[background = {drop shadow = {offset = 4pt}}, resume = a]
\end{goban}
```

/pgfgo/goban/background/drop shadow/opacity =⟨*float*⟩ (no default, initially `0.5`)


Opacity of the shadow.


/pgfgo/goban/background/drop shadow/color =⟨*color*⟩ (no default, initially `black`)

Color of the shadow.

## 4.4 Partial Board

In many cases, it's not necessary to represent a full board, but rather just a rectangular section—whether due to space constraints, to focus attention on a specific area, or to simplify diagram creation. The `goban` environment includes the *key* `partial`, which defines this region with two opposite vertices of a rectangle, regardless of the order in which they are given. For example, `partial = A1:D3` is equivalent to `partial = D3:A1`.





```
partial = D9:I6
partial = I6:D9
partial = D6:I9
partial = I9:D6
```

/pgfgo/goban/partial=⟨*intersection*⟩:⟨*intersection*⟩ or `false` (no default)

Shows only a part of the board: the rectangle that has those two intersections as opposite corners, in any order. It can also be written `partial = {B2, D4}` or `partial = {B2 to D4}`. With `false`, it shows the whole board again (for example, after a global `partial` set with `\pgfgoset`).



```
\tikzset{flecha/.style = {-{latex[]}, line width = 1pt, red}}

\begin{goban}[partial = A1:D3]
 \draw[flecha] (1,1)--(4,3); % From A1 to D3
\end{goban}

\begin{goban}[partial = A9:I6]
 \draw[flecha] (1,9)--(9,6); % From A9 to I6
\end{goban}

\begin{goban}[partial = E2:B4]
 \draw[flecha] (5,2)--(2,4); % From E2 to B4
\end{goban}
```

## 4.5 Board Labels


Labels are the alphanumeric indicators (letters and numbers) that appear on the sides of the board to identify intersections.

/pgfgo/goban/label=⟨*options*⟩ (default `true`)

Controls the properties of the labels, such as their position and format.

/pgfgo/goban/label/true (no value)

Puts the letters below and the numbers on the left: `A1` is read from the lower left corner. It is the same as `label = {at = {south, west}}`; for the four sides, `label = {at = all}`.




```
\begin{goban}[5, label]
 \stones[b]{A1}
\end{goban}
```

/pgfgo/goban/label/false (no value)

Disables all labels.

/pgfgo/goban/label/at =⟨*options*⟩ (no default)

Defines on which sides of the board the labels appear. Options include combinations of cardinal positions or predefined values like ”all” or ”none”.

/pgfgo/goban/label/at/all (style, no value)

Displays labels on all sides of the board (north, south, east, and west).

/pgfgo/goban/label/at/none (style, no value)

Equivalent to `label=false`, removing all labels.

/pgfgo/goban/label/at/east (style, no value)

Places labels only on the right side (vertical numbers).

/pgfgo/goban/label/at/right (style, no value)

Equivalent to `east`.

/pgfgo/goban/label/at/north (style, no value)

Places labels only at the top (horizontal letters).

/pgfgo/goban/label/at/above (style, no value)

Equivalent to `north`.

/pgfgo/goban/label/at/south (style, no value)

Places labels only at the bottom (horizontal letters).

/pgfgo/goban/label/at/below (style, no value)


Equivalent to `south`.

/pgfgo/goban/label/at/west (style, no value)

Places labels only on the left side (vertical numbers).

/pgfgo/goban/label/at/left (style, no value)

Equivalent to `west`.

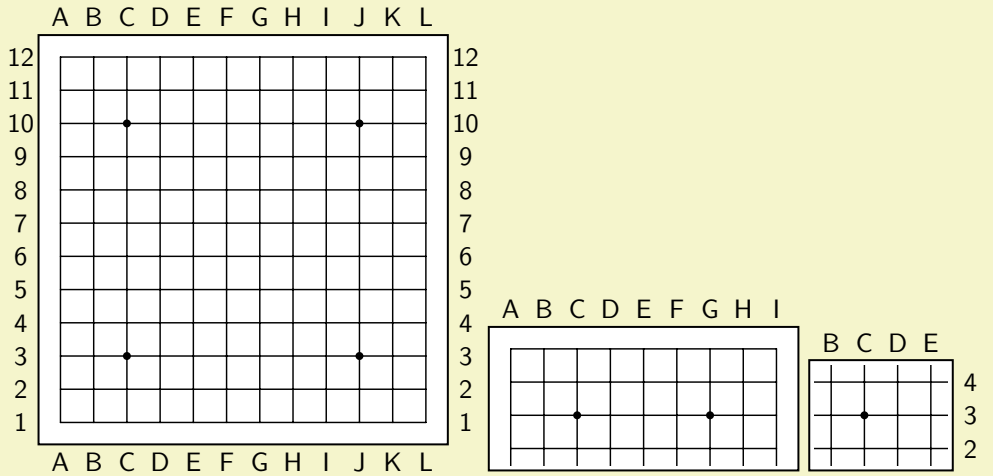



```
\begin{goban}[12, label = {at = {all}}]
\end{goban}

\begin{goban}[partial = A6:I9, label = {at = north}]
\end{goban}

\begin{goban}[partial = B2:E4, label = {at = {north, east}}]
\end{goban}
```

/pgfgo/goban/label/font size = ⟨*dimension*⟩ (no default, initially `the current font size`)

Adjusts the font size of the labels.

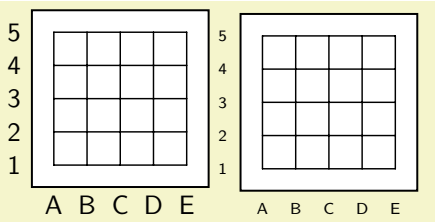



```
\begin{goban}[5, label = {at = {south, west}}]
\end{goban}

\begin{goban}[5, label = {at = {south, west}, font size = 6pt}]
\end{goban}
```

/pgfgo/goban/label/font = ⟨*font commands*⟩ (no default, initially `\sffamily`)

Sets the font of the labels.





```
\begin{goban}[5, label = {at = {south, west}, font = \bfseries}]
\end{goban}
```

/pgfgo/goban/label/sep = ⟨*dimension*⟩ (no default, initially `0.35cm`)

Controls the distance between the labels and the board's border.

/pgfgo/goban/label/color = ⟨*color*⟩ (no default, initially `black`)

Defines the text color of the labels.




```
\begin{goban}[5, label = {at = {south, west}, color = red, sep = 0.6cm}]
 \stones[b]{A1}
\end{goban}
```

/pgfgo/goban/label/columns = ⟨*letters, numbers or kanji*⟩ (no default, initially `letters`)


How the coordinates of the columns (above and below) are written: with letters (as in the commands, without the I if `use i = false`), with numbers, or with numbers in kanji (一, 二, ⋯, 十, 十一, …).

/pgfgo/goban/label/rows = ⟨*letters, numbers or kanji*⟩ (no default, initially `numbers`)

The same for the rows (at the sides). The kanji of the rows are aligned on the side of the board, so that the two-character ones do not overlap it.

/pgfgo/goban/label/columns direction = ⟨*left to right or right to left*⟩ (no default, initially `left to right`)


The side from which the columns are counted.




```
\begin{goban}[5, label = {at = {north, east},
  columns direction = right to left, rows = letters}]
 \stones[b]{B4}
\end{goban}
```

/pgfgo/goban/label/rows direction = ⟨*bottom to top or top to bottom*⟩ (no default, initially `bottom to top`)

The side from which the rows are counted. These four options only change what is written on the border: the coordinates of the commands (`C3`) stay the same. On a partial board, they are counted from the edge of the whole board.




```
\begin{goban}[5, label = {at = {north, west}, columns = numbers, rows direction = top to bott
 \stones[b]{C4}
\end{goban}
```

/pgfgo/goban/label/style = ⟨*western, japanese or chinese*⟩ (no default, initially **western**)

Sets the four options above as usual in each place.

/pgfgo/goban/label/style/western (style, no value)

Columns with letters from the left and rows with numbers from the bottom.


/pgfgo/goban/label/style/japanese (style, no value)

Columns with numbers from the right and rows with kanji from the top, as in Japanese books: the top right corner is 1-一.

/pgfgo/goban/label/style/chinese (style, no value)

Columns with numbers from the left and rows with kanji from the top.

The kanji need a font that has them. With LuaLaTeX, for example, IPAex (included in TeX Live and MiKTeX):

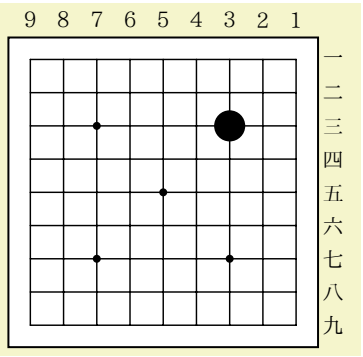



```
\font\kanji = {file:ipaexm.ttf} at 8pt
\begin{goban}[9, label = {at = {north, east}, style = japanese, font = \kanji}]
 \stones[b]{G7}
\end{goban}
```

## 4.6 Captures

With the Lua kernel (p. 13), PGFGO can keep track of the stones on the board and remove the ones left without liberties, as in a game.

/pgfgo/goban/captures=⟨*remove, fade or false*⟩ (default **remove**, initially **false**)

Turns captures on. When a move leaves an opposing group without liberties, that group is removed from the board. If it leaves its own group without liberties (a suicide), that group is removed. Stones placed with **\stone** and **\stones** also count; neutral stones and prisoners do not. A move outside a partial board also captures. A move on an occupied point produces a warning, because it is not possible in a game. With **kernel = expl3**, this *key* raises an error.



```
\pgfgoset{goban = {5, partial = A1:C3}}

\begin{goban}
 \moves*{B1,A1,A2}
\end{goban}

\begin{goban}[captures]
 \moves*{B1,A1,A2} % 3 captures 2.
\end{goban}
```


Since PGF cannot erase what it has already drawn, with `captures` the stones are drawn when the `goban` ends. For this reason, if the style is changed with `\pgfgoset` inside a `goban` with captures, the change does not reach the stones; the options of each command do.

`/pgfgo/goban/captures/remove` (style, no value)

Captured stones disappear. It is the same as `captures` or `captures = true`.

`/pgfgo/goban/captures/fade` (style, no value)

Captured stones stay on the board, drawn as prisoners (with the style of `\prisoner` and `/pgfgo/prisoner`).



```
\pgfgoset{goban = {5, partial = A1:E3}}


\begin{goban}[captures = fade]
 \stones[w]{C1,D1}
 \stones[b]{B1,C2,D2}
 \moves*{E1}
\end{goban}
```

`/pgfgo/goban/captures/false` (style, no value)

Turns captures off. It is the initial value.

`/pgfgo/goban/captured marks`=⟨*keep or remove*⟩ (no default, initially `keep`)

Decides what happens to the marks on a stone when it is captured. It only works with `captures`. Marks on empty points do not change.



```
\pgfgoset{goban = {5, partial = A1:C3, captures}}

\begin{goban}
 \stones[w]{A1}\stones[b]{B1}
 \marks[triangle]{A1}
 \moves*{A2}
\end{goban}

\begin{goban}[captured marks = remove]
 \stones[w]{A1}\stones[b]{B1}
 \marks[triangle]{A1}
 \moves*{A2} % the triangle goes with the white stone.
\end{goban}
```

`/pgfgo/goban/captured marks/keep` (style, no value)


The marks stay on the empty point. It is the initial value.

`/pgfgo/goban/captured marks/remove` (style, no value)

The marks go with the stone, also with `captures = fade`. Sequences keep their numbers.

`\pgfgoprisoners{`⟨*player*⟩`}`

Writes how many prisoners the player (`black` or `b`, `white` or `w`) has in the last `goban` with `captures`: the opponent's stones that their moves captured.


Black: 1. White: 0.

```
\pgfgoset{goban = {5, partial = A1:C3}}

\begin{goban}[captures]
 \moves*{B1,A1,A2}
\end{goban}


Black: \pgfgoprisoners{black}. White: \pgfgoprisoners{white}.
```

## 4.7 Territory

At the end of the game, the territory can be marked by hand with `\marks` (p. 92) or with `\territory`, which also counts it.

`\territory[`⟨*options*⟩`]{`⟨*polygon*⟩`}`

Marks as territory the points of the polygon with those vertices (in order), including its border. It does not mark the points that have a living stone: prisoners count as territory. Vertices are written as in `\stones`; a single one marks a point, and two, a segment. It works with both kernels.

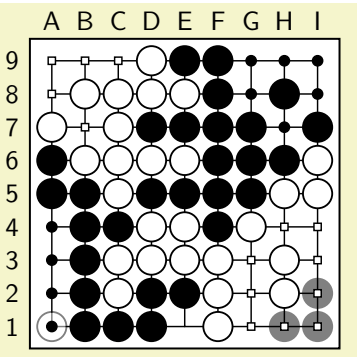



```
 \begin{goban}[label = {at = {above, left}}]
\stones[b] {A6|-B5|-D1|-E2, C4, E9-|F4, D5-|G7--D7, H6, H8, I7}
\stones[w] {E8-|C5, B:E6, A7, B8, D9, I6|- H5, H2:3, F1|-C3, C2, D:E4, G4}
\prisoners[b]{H1-|I2}
\prisoner[w] {A1}

  \territory[b]{A1,A5,B5,B1}
  \territory[b]{F9,F7,G7,G6,I6,I9}
  \territory[w]{F1,F4,G4,G5,I5,I1}
  \territory[w]{A9,A6,C6,C8,D8,D9}
 \end{goban}
```

`\territory[`⟨*options*⟩`]{`⟨*auto*⟩`}`

With `auto` instead of a polygon, it finds the territory by itself: each region of points without living stones belongs to the color around it. If both colors touch it (dame, seki), or none, it is neutral. Prisoners count as dead stones. Without a player, it marks the territory of both; with `b` or `w`, only that player's. Only with the Lua kernel (p. 13).

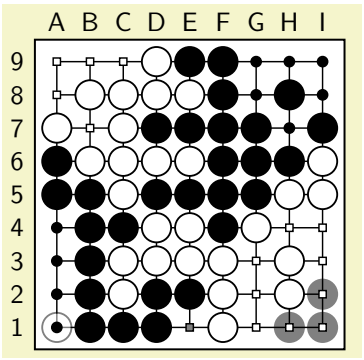


```
\begin{goban}[label = {at = {above, left}}]
\stones[b] {A6|-B5|-D1|-E2, C4, E9-|F4, D5-|G7--D7, H6, H8, I7}
\stones[w] {E8-|C5, B:E6, A7, B8, D9, I6|- H5, H2:3, F1|-C3, C2, D:E4, G4}
\prisoners[b]{H1-|I2}
\prisoner[w] {A1}

 \territory[dame]{auto}
\end{goban}
```

/pgfgo/territory/black (no value)

The territory belongs to Black. It can also be written `b`.

/pgfgo/territory/white (no value)

The territory belongs to White. It can also be written `w`.

/pgfgo/territory/neutral (no value)

Neutral points. It is what a polygon without a player marks. It can also be written `n`.

/pgfgo/territory/b (no value)

Short for `black`.

/pgfgo/territory/w (no value)


Short for `white`.

/pgfgo/territory/n (no value)

Short for `neutral`.

/pgfgo/territory/draw=⟨*marks, fill or region*⟩ (no default, initially `marks`)


With `marks`, every point gets the territory mark of the player. With `fill`, the region is filled below the stones.

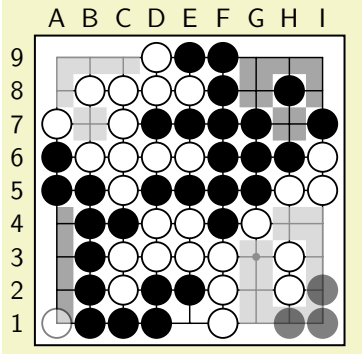

```
\begin{goban}[label = {at = {above, left}}]
\stones[b] {A6|-B5|-D1|-E2, C4, E9-|F4, D5-|G7--D7, H6, H8, I7}
\stones[w] {E8-|C5, B:E6, A7, B8, D9, I6|- H5, H2:3, F1|-C3, C2, D:E4, G4}
\prisoners[b]{H1-|I2}
\prisoner[w] {A1}

\territory[draw = fill]{auto}
\end{goban}
```

With `region`, the territory of each color is a single polygon: every square of the grid with a corner in the territory is painted (dead stones count as territory). Its sides run along the lines of the board, its vertices are always on intersections, and it reaches the edge of the board. Two areas that touch at a single corner are kept apart. All the `\territory` of a color in the same `goban` (also the `TB` and `TW` territory of `\sgf`) make a single region, which is drawn at the end of the `goban` with the style of the last one. Neutral points are filled one by one, as with `fill`. The outline and its vertices can be drawn on top, with `line` and `vertices`, and `\pgfgoregion` gives its properties.




```
\begin{goban}[label = {at = {above, left}}]
\stones[b] {A6|-B5|-D1|-E2, C4, E9-|F4, D5-|G7--D7, H6, H8, I7}
\stones[w] {E8-|C5, B:E6, A7, B8, D9, I6|- H5, H2:3, F1|-C3, C2, D:E4, G4}
\prisoners[b]{H1-|I2}
\prisoner[w] {A1}

\territory[draw = region]{auto}
\end{goban}
```

/pgfgo/territory/dame=⟨*boolean*⟩ (default `true`, initially `false`)

With `auto`, it also marks the neutral points.

/pgfgo/territory/forget (no value)

`resume` does not bring this territory, even with `territory` (p. 62).


The other options of `\territory` change the style of the player only for that command, like `mark` and `fill` in `\territory[w, mark = {cross}]{auto}`. Without a player, they change the style of all three. The style of each player is set with `/pgfgo/players`:

/pgfgo/players/black/territory=⟨*territory options*⟩ (no default)

Style of the territory of each player (`black`, `white` or `neutral`).

/pgfgo/players/black/territory/mark=⟨*mark options*⟩ (no default, initially `t-circle`)

Mark of every point, with `draw = marks`. It is `t-circle` for Black and `t-square` for White and the neutral points.



```
\begin{goban}[5]
 \stones[b]{C1:5}
 \stones[w]{D1:5}
 \territory[b, mark = {t-square}]{A1, A5, B5, B1}
 \territory[w]{E1, E5}
\end{goban}
```

/pgfgo/players/black/territory/fill=⟨*fill options*⟩ (default `true`)

Fill, with `draw = fill` and `draw = region`.

/pgfgo/players/black/territory/fill/true (no value)

Draws the fill. This is the initial value.

/pgfgo/players/black/territory/fill/false (no value)


Does not draw the fill: with `draw = region`, only the outline or the vertices are left.

/pgfgo/players/black/territory/fill/color=⟨*color*⟩ (no default, initially `black`)

Color of the fill: `black` for Black, `white!80!black` for White and `gray` for the neutral points.

/pgfgo/players/black/territory/fill/opacity=⟨*number*⟩ (no default, initially `0.35`)


Opacity of the fill: `0.35` for Black and the neutral points, `0.7` for White.



```
\begin{goban}[5]
 \stones[b]{C1:5}
 \stones[w]{D1:5}
 \territory[b, draw = fill,
  fill = {color = blue, opacity = 0.5}]{A1, A5, B5, B1}
 \territory[w, draw = fill]{E1, E5}
\end{goban}
```

/pgfgo/players/black/territory/line=⟨*line options*⟩ (default `true`)

Outline of the region, with `draw = region`. Alone or with `true`, it draws the outline; options alone do not turn it on.

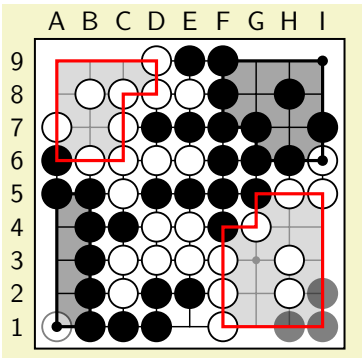


```
 \begin{goban}[label = {at = {above, left}}]
\stones[b] {A6|-B5|-D1|-E2, C4, E9-|F4, D5-|G7--D7, H6, H8, I7}
\stones[w] {E8-|C5, B:E6, A7, B8, D9, I6|- H5, H2:3, F1|-C3, C2, D:E4, G4}
\prisoners[b]{H1-|I2}
\prisoner[w] {A1}

  \territory[b, draw = region, line,
   vertices]{auto}
  \territory[w, draw = region,
   line = {true, color = red}]{auto}
 \end{goban}
```

/pgfgo/players/black/territory/line/true (no value)

Draws the outline.

/pgfgo/players/black/territory/line/false (no value)

Does not draw the outline. This is the initial value.

/pgfgo/players/black/territory/line/color=⟨*color*⟩ (no default, initially `black`)

Color of the outline: `black` for Black and `white!40!black` for White.

/pgfgo/players/black/territory/line/width=⟨*dimension*⟩ (no default, initially `1.2pt`)


Width of the outline.

/pgfgo/players/black/territory/line/opacity=⟨*number*⟩ (no default, initially `1`)

Opacity of the outline and of the vertices.

/pgfgo/players/black/territory/line/above=⟨*boolean*⟩ (default `true`, initially `true`)

With `true`, the outline and the vertices are drawn above the stones and the marks. With `false`, below the stones, together with the fill.



```
\begin{goban}[5]
 \stones[b]{C1:5}
 \stones[w]{D1:5}
 \territory[b, draw = region, fill = false,
  line = {true, color = red, width = 2pt, opacity = 0.7}]{A1, A5, B5, B1}
\end{goban}

\begin{goban}[5]
 \stones[b]{C1:5}
 \stones[w]{D1:5}
 \territory[b, draw = region, fill = false,
  line = {true, color = red, width = 2pt, opacity = 0.7, above = false}]{A1, A5, B5, B1}
\end{goban}
```

/pgfgo/players/black/territory/vertices=⟨*options*⟩ (default `true`)

Dots on the vertices of the outline, with `draw = region`, like the star points. They are drawn on the same layer as the outline. Alone or with `true`, it draws them; options alone do not turn them on.

/pgfgo/players/black/territory/vertices/true (no value)

Draws the vertices.

/pgfgo/players/black/territory/vertices/false (no value)


Does not draw the vertices. This is the initial value.

/pgfgo/players/black/territory/vertices/radius=⟨*dimension*⟩ (no default, initially `2pt`)

Radius of the dots.

/pgfgo/players/black/territory/vertices/color=⟨*color*⟩ (no default)

Color of the dots. Without this key, they take the color of the outline.



```
\begin{goban}[5]
 \stones[b]{C1:5}
 \stones[w]{D1:5}
 \territory[b, draw = region,
  vertices = {true, radius = 3pt, color = red}]{A1, A5, B5, B1}
\end{goban}
```

\pgfgoscore[⟨*options*⟩]{⟨*player*⟩}


Writes the score of the player (`black` or `b`, `white` or `w`) in the last `goban`, with Japanese rules: the points of their territory, plus the opponent's dead stones in it, plus the stones they captured (with `captures`), plus the `komi` for White. A point marked twice counts once.

```
Black: \pgfgoscore{black}. White: \pgfgoscore[komi = 6.5]{white}.
```

With the board above, it writes "Black: 11. White: 23.5".

/pgfgo/score/komi=⟨*number*⟩ (no default, initially `0`)

Komi added to the score of White. It can be set for the whole document with `\pgfgoset{score = {komi = 6.5}}`.


Black: 10. White: 11.5.

```
\begin{goban}[5]
 \stones[b]{C1:5}
 \stones[w]{D1:5}
 \territory{auto}
\end{goban}


Black: \pgfgoscore{b}. White: \pgfgoscore[komi = 6.5]{w}.
```

\pgfgoregion{⟨*player*⟩}{⟨*property*⟩}

Writes a property of the region (`draw = region`) of the player (`black` or `b`, `white` or `w`) in the current `goban` or in the last one. It is expandable, so it can be used in a computation or inside the coordinates of `\marks`. The properties are those of the whole outline, even on a partial board. Without a region, the numbers are 0. The properties are:

- `polygons`: the number of outlines, outer ones and holes.
- `outlines`: the number of outer outlines, one for each separate area.
- `holes`: the number of holes.
- `vertices`: the number of vertices of all the outlines.
- `area`: the number of painted squares.
- `perimeter`: the length of all the outlines, in squares.
- `polygon` ⟨*i*⟩: the vertices of outline ⟨*i*⟩, as coordinates separated by commas (for example, `A1,D1,D4,A4`). Empty if there are not that many outlines.

Each outline starts at its lowest vertex and, among those, at the leftmost one. Outer outlines go counterclockwise and holes, clockwise. The outlines are sorted by that first vertex, from bottom to top.



Outlines: 2 (1 hole). Area: 60 squares.

```
\begin{goban}[label = {at = {above, left}}]
 \stones[w]{D4 R F6}
 \territory[b, draw = region, line]{B2,B8,H8,H2}
 \marks[triangle]{\pgfgoregion{b}{polygon 2}}
\end{goban}


Outlines: \pgfgoregion{b}{polygons}
(\pgfgoregion{b}{holes} hole).
Area: \pgfgoregion{b}{area} squares.
```

## 4.8 Moves on Points Already Played

In numbered diagrams, when a move is played on a point where there already was a move (for example, when a ko is retaken), books do not draw it: the point still shows the first stone, and below the diagram they write, for example, "3 at 1".

`/pgfgo/goban/notes=`⟨*boolean*⟩ (default `true`, initially `false`)

A numbered move on a point where there already was a numbered move of the same `goban` is not drawn: the point still shows the first one, even if it was captured, and "N at M" is noted. Only numbered moves (`\moves*`) that are visible on the board count. It works with both kernels.



3 at 1

```
\pgfgoset{goban = {5, partial = A2:E4}}

\begin{goban}[notes]
 \stones[b]{B3,C2,C4}
 \stones[w]{D2,D4,E3}
 \moves*[w]{C3}
 \moves*{D3}
 \moves*[from = 3, w]{C3}
\end{goban}

\pgfgomovenotes
```

`\pgfgomovenotes[`⟨*options*⟩`]`

Writes the notes of the last `goban`, separated by commas. If there are no notes, it writes nothing. The options are those of `/pgfgo/notes`.

`/pgfgo/notes =` ⟨*options*⟩ (no default)


Options of `\pgfgomovenotes` for the whole document, for example `\pgfgoset{notes = {at = en}}`.

`/pgfgo/notes/at =` ⟨*text*⟩ (no default, initially `at or its translation`)

Text between the two numbers.

`/pgfgo/notes/separator =` ⟨*text*⟩ (no default, initially `a comma and a space`)

Text between the notes.




3 on 1; 4 on 2

```
\begin{goban}[5, partial = A2:E4, notes]
 \stones[b]{B3,C2,C4}
 \stones[w]{D2,D4,E3}
 \moves*[w]{C3}
 \moves*{D3}
 \moves*[from = 3, w]{C3}
 \moves*{D3}
\end{goban}

\pgfgomovenotes[at = on, separator = {; }]
```

## 4.9 Remembering a Board

A `goban` with a name stores everything it draws (stones, moves, marks, arrows, lines and territory, also what comes from `\sgf`), together with its options. Another `goban` can start with that board as it was, with `resume`, and `\pgfgoview` shows it in the text (p. 63).




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[name = board1]
 \stones[b]{C2,D3}
 \moves*[w]{B4}
\end{goban}

\begin{goban}[resume = board1]
 \moves*{C3} % Continues with 2 (Black).
\end{goban}

\begin{goban}[resume = {board1, numbers}]
 \moves*{C3}
\end{goban}
```


`/pgfgo/goban/name`=⟨*name*⟩ (no default)

Stores with that name everything drawn in this `goban`, together with its options. The name is free (for example, `gob:board1`). Another `goban` with the same name replaces it.

`/pgfgo/goban/resume`=⟨*name, options*⟩ (no default)

Starts the `goban` with the board that has that name, as it was at the end (with the captures resolved: if that `goban` used `captures`, this one does too). The numbering and the turn continue from there. By default it brings only the stones, without numbers, marks or territory; the options ask for the rest. The board options (size, `partial`, coordinates) are given in each `goban`. If there is no `goban` with that name, an error is raised.

With `name` and `resume` in the same `goban` (in any order), the new name stores what it brought, as it was drawn, plus its own, and the board of `resume` does not change: this is how variations are made. With the same name in both, the `goban` keeps adding to that board.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[name = base]
 \stones[b]{C2,D3}
 \stones[w]{C3}
\end{goban}

\begin{goban}[name = variation1, resume = base]
 \moves*[w]{D2}
\end{goban}

\begin{goban}[name = variation2, resume = base]
 \moves*[w]{B3}
\end{goban}

\begin{goban}[resume = {variation1, numbers}]
 \moves*{B4}
\end{goban}
```

/pgfgo/goban/resume/numbers=⟨*boolean*⟩ (default `true`, initially `false`)


Also brings the move numbers.

/pgfgo/goban/resume/marks=⟨*boolean*⟩ (default `true`, initially `false`)

Also brings the marks, the arrows and the lines.

/pgfgo/goban/resume/territory=⟨*boolean*⟩ (default `true`, initially `false`)

Also brings the territory.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[name = saved]
 \stones[b]{C2:4}
 \moves*[w]{D3}
 \marks[triangle]{B3}
 \territory[b]{B2, B4}
\end{goban}


\begin{goban}[resume = saved]
\end{goban}


\begin{goban}[resume = {saved, numbers, marks, territory}]
\end{goban}
```

So that `resume` does not bring a stone, a move, a mark, an arrow or a territory, it is drawn with the option `forget` (`\stone[forget]{C3}`, `\marks[forget, circle]{A1}`, …); with `label = forget`, a move comes without its number even with `numbers`. What is forgotten is still stored: `\pgfgoview` shows it with `forgotten`.

## 4.10 Views in the Text

A `goban` with a name stores everything it draws. Later, `\pgfgoview` shows a part of that board, as it was at the end (with the captures done), in the middle of a paragraph: a single stone or a rectangle.



The black stone at D3 ❷ captures the white one at C3 ┼. This is the ko:  .

```
\begin{goban}[5, name = board1, captures]
 \stones[b]{B3, C2, C4}
 \stones[w]{D2, D4, E3}
 \moves*[w]{C3, D3}
\end{goban}


The black stone at D3 \pgfgoview{board1}{D3} captures the white one at C3 \pgfgoview{board1}{C3}.
This is the ko: \pgfgoview{board1}{B2:E4}.
```

\pgfgoview[⟨*options*⟩]{⟨*name*⟩}{⟨*part*⟩}

Draws the intersection or the rectangle (written as in `partial`) of the `goban` with that name, as it was at the end. By default everything the `goban` drew in that part is shown (stones, move numbers, marks, arrows and territory) with the background and the coordinates of that `goban`, at the size of the text and centered at the height of the lowercase letters. The options are those of `/pgfgo/view`, which remove the marks, the numbers or the territory, or add what was forgotten, and, also, any `goban` option, which is applied after those of the named `goban`: this removes the background, the coordinates, the grid or the star points, or changes the style of the stones, the marks and the board (`players`, `stone`, `mark`, `grid`, `background`, …).

The view uses the style that `goban` had when it was drawn (the profile, what was set with `\pgfgoset` and its options), even if it changes later. The profile of the views (`view/profile`), `\pgfgoset{view = ...}` and the options of the view go on top.

A view changes nothing of what the last `goban` stores: `\pgfgoscore`, `\pgfgoprisoners` and `\pgfgomovenotes` still talk about it, and what each named `goban` stores stays the same.

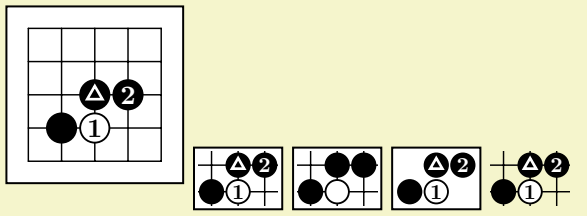

```
\begin{goban}[5, name = board2]
 \stones[b]{B2, C3}
 \moves*[w]{C2, D3}
 \marks[b, triangle]{C3}
\end{goban}

\pgfgoview{board2}{B2:D3}
\pgfgoview[marks = false, numbers = false]{board2}{B2:D3}
\pgfgoview[label = false, grid = false]{board2}{B2:D3}
\pgfgoview[background = false]{board2}{B2:D3}
```

/pgfgo/view=⟨*options*⟩ (no default)

Options for all views, with `\pgfgoset`. The `goban` options that are not of `/pgfgo/view` are added to the one views come with: `scale = 0.8`.

Without background and bigger: ▲.

```
\pgfgoset{view = {background = false, scale = 1}}
Without background and bigger: \pgfgoview{board2}{C3}.
```

/pgfgo/view/marks=⟨*boolean*⟩ (default `true`, initially `true`)

With `false`, the marks, arrows and lines are not drawn.

/pgfgo/view/numbers=⟨*boolean*⟩ (default `true`, initially `true`)


With `false`, the numbers of the moves are not drawn.

/pgfgo/view/territory=⟨*boolean*⟩ (default `true`, initially `true`)

With `false`, the territory is not drawn.

/pgfgo/view/forgotten=⟨*boolean*⟩ (default `true`, initially `false`)

Also draws what was drawn with `forget` (p. 62).

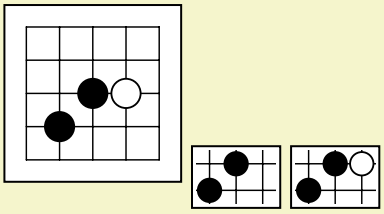

```
\begin{goban}[5, name = board3]
 \stones[b]{B2, C3}
 \stone[w, forget]{D3}
\end{goban}

\pgfgoview{board3}{B2:D3}
\pgfgoview[forgotten]{board3}{B2:D3}
```

/pgfgo/view/raise=⟨*dimension*⟩ (no default, initially `0.5ex`)


How high above the baseline of the text the center of the view is.

Text  text  text  .

```
Text \pgfgoview[raise = 0pt]{board2}{C3}
text \pgfgoview{board2}{C3}
text \pgfgoview[raise = 1.5ex]{board2}{C3}.
```

/pgfgo/view/profile=⟨*name*⟩ (no default, initially `false`)

A profile for the views (p. 21), for example `simple`. It goes after the style of the named `goban` and before the other options of the view. With `false`, the view uses the style of the `goban` as it is.



```
\pgfgoview{board1}{B2:E4}
\pgfgoview[profile = simple]{board1}{B2:E4}
\pgfgoview[profile = wain]{board1}{B2:E4}
```

# 5 Stones, Moves, and Prisoners

Stones are the fundamental elements. In PGFGO, commands and options are provided to draw them flexibly, allowing customization of their appearance and behavior according to the needs of the diagram.

## 5.1 Stones

`\stone[`⟨*options*⟩`]{`⟨*intersection*⟩`}`

This command draws an individual stone at the specified intersection. The mandatory argument is the coordinate (e.g., "C2"), while optional options allow adjusting its style, such as color, size, or markings. If no player is given (`b`, `w` or `n`), the stone is *neutral*.

`\stones[`⟨*options*⟩`]{`⟨*intersection , intersection, ...*⟩`}`

Similar to `\stone`, but allows placing multiple stones using the corresponding syntax (see Coordinate Syntax). If no player is given, the stones are also *neutral*: black stones are written `\stones[b]{...}`.

Stones, marks and labels that fall outside the visible region of a partial board are not drawn. A coordinate that does not exist on the board (for example, `E9` on a 5×5 board) is ignored and produces a warning.


It is possible to change an option for all players using `\pgfgoset{stone = {...}}`. This is equivalent to `\pgfgoset{players = {all = {stone = {...}}}}`.

`/pgfgo/stone/fill` = ⟨*options*⟩ (no default)

Controls the fill options of a stone.

`/pgfgo/stone/fill/color` = ⟨*color*⟩ (no default)

Defines the fill color of a stone.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[fill = {color = cyan!80!black}]{C2,D3}
 \stone[fill = {color = magenta!80!black}]{B4}
\end{goban}
```

`/pgfgo/stone/fill/opacity` = ⟨*float*⟩ (no default, initially `1`)

Controls the opacity of the stone's fill, ranging from 0 (transparent) to 1 (opaque).



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}


\begin{goban}
 \stones[b, fill = {opacity = 0.8}]{C2,D3}
 \stone[w, fill = {opacity = 0.5}]{B4}
\end{goban}
```

`/pgfgo/stone/line` = ⟨*option*⟩ (no default, initially `true`)

Controls the border options of a stone.

`/pgfgo/stone/line/color` = ⟨*color*⟩ (no default, initially `black`)

Sets the border color of the stone, which is black by default for all stones.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b, line = {color = magenta}]{C2,D3}
 \stone[w, line = {color = cyan}]{B4}
\end{goban}
```

/pgfgo/stone/line/opacity = ⟨*float*⟩ (no default, initially 1)

Defines the opacity of the stone's border, allowing it to be more subtle or transparent.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b, line = {opacity = 0.5}]{C2,D3}
 \stone[w, line = {opacity = 0.8}]{B4}
\end{goban}
```

/pgfgo/stone/line/width = ⟨*dimension*⟩ (no default, initially 0.7pt)

Controls the thickness of the stone's border.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w, line = {width = 2pt}]{B4}
\end{goban}
```

/pgfgo/stone/radius = ⟨*dimension*⟩ (no default, initially 5.5pt)

Sets the size of the stone by its radius.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b, radius = 0.15cm]{C2,D3}
 \stone[w, radius = 0.25cm]{B4}
\end{goban}
```

/pgfgo/stone/scale = ⟨*float*⟩ (no default, initially 1)


Defines a scaling factor that affects all elements of the stone (radius, border, markings), maintaining their proportions.



```
\begin{goban}[5, partial = B2:D4]
 \stones[b, mark = circle]{C2}
 \stones[b, scale = 0.7, mark = circle]{D3}
 \stone[w, scale = 1.3, mark = triangle]{B4}
\end{goban}
```

/pgfgo/stone/black (no value)

Assigns the stone the characteristics of the first player (black by default), including fill and border color. Without `black` (or `b`), `\stone` and `\stones` draw neutral stones.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}


\begin{goban}
 \stones[b]{C2,D3}
 \stone[black]{B4}
\end{goban}
```

/pgfgo/stone/b (no value)

Abbreviation for "black," with identical functionality.

/pgfgo/stone/white (no value)

Assigns the stone the characteristics of the second player (white by default), with a white fill and black border.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[white]{B4}
\end{goban}


\begin{goban}
 \stones[white]{C2,D3}
 \stone[white]{B4}
\end{goban}
```

/pgfgo/stone/w (no value)

Abbreviation for "white," with the same functionality.

/pgfgo/stone/neutral (no value)

The stone belongs to the neutral player. It is the default player of `\stone` and `\stones`.




```
\begin{goban}[5, partial = B2:D4]
 \stones[b]{C2}
 \stones[w]{D3}
 \stone{B4}
 \stone[n]{C3}
\end{goban}
```

/pgfgo/stone/n (no value)

Abbreviation for "neutral".

/pgfgo/stone/drop shadow = ⟨*options*⟩ (no default)

Shadow of the stone: `true`, `false`, `angle`, `offset`, `opacity` and `color`. The options are described in the player reference (p. 25).




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b, drop shadow = {true, angle = -45, offset = 1.5pt}]{C2,D3}
 \stone[w, drop shadow = {true, angle = -45, offset = 1.5pt}]{B4}
\end{goban}
```

/pgfgo/stone/shine =⟨*options*⟩ (default `true`)


Highlight of the stone, drawn on top of it: `true`, `false`, `angle`, `opacity`, `color` and `image`. The options are described in the player reference (p. 25).



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b, shine]{C2,D3}
 \stone[w, shine = {true, color = gray}]{B4}
\end{goban}
```

With `image`, the shine is an image with transparency (PNG or PDF), centered on the stone. If the stone is an image too, the shine is drawn on top of it and does not turn with it: the stones can have their grain turned at random (`rotate = random`) and the light always on the same side.



```
\begin{goban}[5, partial = B2:D4]
 \stones[w, image = {file = stone-white.png, rotate = random},
  shine = {true, image = {file = shine.png}}]{B2, C2, D2, B3, C3, D3}
\end{goban}
```


/pgfgo/stone/image = ⟨*options*⟩ (no default)

Draws the stone with an image (PNG, JPG or PDF) instead of the circle: the fill and the outline are not drawn, and the image does not need to be round. If the shine (`shine`) is on, it is drawn on top of the image. The shadow (`drop shadow`) has the shape of the image; for that, the image must have transparency (a PNG with an alpha channel, or a PDF): the shadow of a JPG is a rectangle. A prisoner with an image is translucent, like any prisoner.

Files are looked up like with `\includegraphics` (for example, in the folders of `\graphicspath`). Each file, at each size, is stored only once in the PDF, however many stones use it. The shadow with the shape of the image needs pdfLaTeX or LuaLaTeX (with PDF output); with other engines the stone is drawn without a shadow, with a warning.

A file name with a comma goes in double braces, `file = {{a,b.png}}`; with single braces, the comma separates two files. As with `\includegraphics`, the name cannot have `&`, `#`, `%`, `$`, `{` or `}`, nor two spaces in a row.


SVG images cannot be used directly: convert them to PDF first, for example with `inkscape --export-type=pdf stone.svg` or with `rsvg-convert -f pdf -o stone.pdf stone.svg`. The same applies to the background, the grid, the star points and the marks.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b, image = {file = stone-black.png}, drop shadow = {true, angle = -
45, offset = 1.5pt}]{C2,D3}
 \stone[w, image = {file = stone-white.png}, drop shadow = {true, angle = -
45, offset = 1.5pt}]{B4}
\end{goban}
```

For all the stones of a player, give the image in the options of the player:




```
\pgfgoset{players = {
 black = {stone = {image = {file = stone-black.png}}},
 white = {stone = {image = {file = stone-white.png}}}}}

\begin{goban}[5, partial = B2:D4]
 \moves{C3, D3, C2, B3}
\end{goban}
```

/pgfgo/stone/image/file = ⟨*file , file, ...*⟩ (no default)

The image file. With several files, each stone uses one of them, chosen by its position: a stone on a given point always shows the same image, in every diagram. This varies the look of the stones, for example the grain of the white ones.




```
\begin{goban}[5, partial = B2:D4]
 \stones[w, image = {file = {stone-white.png, stone-white-
2.png}}]{B2, C2, D2, B3, C3, D3}
\end{goban}
```

/pgfgo/stone/image/width = ⟨*dimension*⟩ (no default, initially `the diameter of the stone`)

The width of the image; the height keeps the proportions. By default it is the diameter of the stone: 2× `radius` × `scale`.


/pgfgo/stone/image/rotate = ⟨*angle*⟩, `random` or ⟨*min*⟩`:`⟨*max*⟩ (no default, initially `0`)

Rotates the image by ⟨*angle*⟩ degrees, counterclockwise. With `random`, each stone gets a different angle, chosen by its position: a stone on a given point always looks the same, in every diagram and in every frame of an animation. This keeps the grain of a single image from looking repeated. The shadow turns with the image, but still falls to the same side.



```
\begin{goban}[5, partial = B2:D4]
 \stones[w, image = {file = stone-white.png,
  rotate = random}]{B2, C2, D2, B3, C3, D3}
\end{goban}
```


With a range ⟨*min*⟩`:`⟨*max*⟩, the angle is chosen as with `random`, but between ⟨*min*⟩ and ⟨*max*⟩ degrees (`random` is the same as `0:360`). This is useful for images that cannot be turned all the way, such as a stone lit from one side.



```
\begin{goban}[5, partial = B2:D4]
 \stones[w, image = {file = stone-white.png,
  rotate = -20:20}]{B2, C2, D2, B3, C3, D3}
\end{goban}
```

/pgfgo/stone/image/opacity = ⟨*float*⟩ (no default, initially `1`)

The opacity of the image.




```
\begin{goban}[5, partial = B2:D4]
 \stones[b, image = {file = stone-black.png}]{C2}
 \stones[b, image = {file = stone-black.png, width = 8pt}]{D3}
 \stone[w, image = {file = stone-white.png, opacity = 0.5}]{B4}
\end{goban}
```

/pgfgo/stone/image/false (style, no value)

Removes the image: the stone is a circle again.

/pgfgo/stone/mark = ⟨*mark keys*⟩ (no default)

Places a mark on the stone (e.g., triangle, circle). Marks can be further customized with other keys, such as color or size.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b, mark = triangle]{C2,D3}
 \stone[w, mark = t-circle]{B4}
\end{goban}
```

/pgfgo/stone/forget (no value)

`resume` does not bring this stone (p. 62). It stays in the memory of the named `goban`: `\pgfgoview` shows it with `forgotten`.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[name = a]
 \stones[b]{C2,D3}
 \stone[w, forget]{B4}
\end{goban}

\begin{goban}[resume = a]
\end{goban}
```

/pgfgo/stone/prisoner=⟨*prisoner options*⟩ (default `fill opacity = 0.5`)

Characterizes a stone as a prisoner, typically with reduced opacity (0.5 by default) to indicate it has been captured. Other options can be added to customize its appearance: they are applied after the prisoner style (`/pgfgo/prisoner` and `/pgfgo/players/white/stone/prisoner`).



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b, prisoner]{C2,D3}
 \stone[white]{B4}
\end{goban}
```

## 5.2 Moves

Move commands allow representing sequences of plays, automatically alternating between black and white. They include options for numbering the moves and customizing the associated stones.


`\move*[`⟨*options*⟩`]{`⟨*intersection*⟩`}`

Draws a stone as part of a move sequence, automatically alternating colors (black, white, black, etc.). The starred version (`\move*`) adds a numeric label to the stone.

`\moves*[`⟨*options*⟩`]{`⟨*intersection , intersection, ...*⟩`}`

Similar to `\move`, but with several moves. The moves are a sequence: they are played in the order in which they are written, and an intersection can be repeated (for example, to retake a ko with `captures`). Each item of the list is an intersection (`C3`), a path (`A1 -- A3 -- C3`: each stretch goes from its first


point to the second) or a part of a row or a column, in the order in which it is written (`C:A 4` is `C4 -- A4`; `C 5:1` is `C5 -- C1`). The other forms of `\stones` (rectangles, `*`, brackets, `;`) have no clear order and raise an error.



```
\begin{goban}[5]
 \moves*{B1 -| D3, C:A 4, E5}
\end{goban}
```

Within the same `goban`, numbering and turn carry over from one `\moves` to the next. Each new `goban` starts at move 1 with Black; to continue a game in another diagram, use `from` and `b` or `w`, or `resume`.

The options of `\moves` also accept those of the style of the stone (`fill`, `line`, `radius`, `shine`, `image`, etc.) and `mark`, like `\stones`. For example, to mark the last move:




```
\begin{goban}[5, partial = B2:D4]
 \moves{C3, D3, C2}
 \moves[mark = circle]{B3}
\end{goban}
```

It is possible to change options for all players using `\pgfgoset{move = {...}}`, which is equivalent to `\pgfgoset{players = {all = {move = {...}}}}`.

`/pgfgo/move/black` (no value)

Sets the move sequence to start with the black player, useful for forcing the start of a play in specific diagrams.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \moves[b]{C2,B4}
 \move{D3}
\end{goban}
```

`/pgfgo/move/white` (no value)

Sets the sequence to start with the white player, altering the natural order of moves.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \moves[white]{C2,B4}
 \move{D3}
\end{goban}
```

`/pgfgo/move/b` (no value)


Short for `black`.

`/pgfgo/move/w` (no value)

Short for `white`.

/pgfgo/move/from = ⟨*number*⟩ (no default)

Defines the starting number of a numbered move sequence, allowing continuation from a specific point instead of starting at 1.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}


\begin{goban}
 \moves*[from = 7]{C2,B4}
 \move*{D3}
\end{goban}
```

/pgfgo/move/label = ⟨*options*⟩ (no default)

Controls the properties of numeric labels in starred moves, such as size, color, or format.

/pgfgo/move/label/font size=⟨*dimension*⟩ (no default, initially `automatic`)

Adjusts the font size of the labels, allowing them to adapt to the stone size or overall design. If it is not set, the size adapts to the number of digits.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}


\begin{goban}
 \moves*[from = 7]{C2,B4}
 \move*[label = {font size = 0.5em}]{D3}
\end{goban}
```

/pgfgo/move/label/format = ⟨*options*⟩ (no default, initially `arabic`)

Defines the numbering style of the labels.

/pgfgo/move/label/format/arabic (no value)

Uses Arabic numerals, the default format for move labels.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \moves*[from = 7]{C2,B4}
 \move*{D3}
\end{goban}
```

/pgfgo/move/label/format/alph (no value)

Uses lowercase letters for the labels.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\pgfgoset{move={label = {format=alph}}}
\begin{goban}
 \moves*[from = 7]{C2,B4}
 \move*{D3}
\end{goban}
```

/pgfgo/move/label/format/Alph (no value)

Uses uppercase letters.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\pgfgoset{move = {label = {format = Alph}}}
\begin{goban}
 \moves*[from = 7]{C2,B4}
 \move*{D3}
\end{goban}
```

/pgfgo/move/label/format/roman (no value)

Uses lowercase Roman numerals.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\pgfgoset{move = {label = {format = roman}}}
\begin{goban}
 \moves*{C2,B4}
 \move*{D3}
\end{goban}
```

/pgfgo/move/label/format/Roman (no value)

Uses uppercase Roman numerals.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\pgfgoset{move = {label = {format = Roman}}}
\begin{goban}
 \moves*{C2,B4}
 \move*{D3}
\end{goban}
```

/pgfgo/move/label/color = ⟨*color*⟩ (no default)

Defines the color of the labels.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \moves*{C2,B4}
 \move*{D3}
\end{goban}

\begin{goban}
 \moves*[label = {color = red}]{C2,B4}
 \move*[label = {color = blue}]{D3}
\end{goban}
```

/pgfgo/move/label/forget (no value)

With `resume = {..., numbers}`, this move comes without its number (p. 62). With `\pgfgoview`, the number is only shown with `forgotten`.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}[name = a]
 \moves*{C2}
 \moves*[label = forget]{B4}
 \moves*{D3}
\end{goban}

\begin{goban}[resume = {a, numbers}]
 \moves*{C:D4}
\end{goban}
```

/pgfgo/move/forget (no value)

`resume` does not bring these moves, neither the stone nor the number. The numbering continues from the last move it brings.

## 5.3 SGF Games

SGF is the format that almost every Go program uses to save games. With the Lua kernel (p. 13), PGFGO can read them.

In every command that reads SGF files, the name can have spaces, accents, parentheses and other scripts. The special characters of TEX are written with a backslash: `\sgf{a\&b.sgf}` reads `a&b.sgf`, and the same goes for `\#`, `\%`, `\$`, `\{` and `\}`. Two spaces in a row are read as one, because TEX joins them before PGFGO sees the name.

`\sgf[`⟨*options*⟩`]{`⟨*file*⟩`}`


Draws on the `goban` the main line of the first game in the file: the setup stones (`AB` and `AW`) as with `\stones`, and the moves as with `\moves*`. Variations are not drawn. Passes count for the numbering, but are not drawn. It only exists inside `goban`.

The stones that the nodes after the first move add (`AB`, `AW`) or remove (`AE`) are applied together with the previous move. Removing stones needs `captures`; without `captures`, `\sgf` warns once and does not remove them.


When it ends, the numbering and the turn are ready to continue the game with `\moves`. `\sgf` works with `partial`, `captures`, `name` and `resume`. If the game is for a board of another size, a warning is produced. With `kernel = expl3`, `\sgf` raises an error.

In the examples, `game.sgf` contains a short 9×9 game:

```
(;GM[1]FF[4]SZ[9]PB[Black]PW[White]C[A short game.]
;B[ee];W[ef];B[df];W[ce];B[ff];W[gd];B[eg]C[Black captures.];W[dd];B[cf];W[fd])
```




```
\begin{goban}[label = {at = {north, west}}]
 \sgf{game.sgf} % Without captures, 2 stays.
\end{goban}
```



```
\begin{goban}[label = {at = {north, west}}, captures]
 \sgf{game.sgf}
\end{goban}
```

/pgfgo/sgf/from = ⟨*number*⟩ (no default, initially 1)


Number of the first numbered move. The moves before it are drawn without numbers.



```
\begin{goban}[captures]
 \sgf[from = 7]{game.sgf}
\end{goban}
```

/pgfgo/sgf/to = ⟨*number*⟩ or `last` (no default, initially `last`)

Number of the last move that is played. The following ones are not drawn. With `last` (or a negative number), up to the last one.




```
\begin{goban}[captures]
 \sgf[to = 6]{game.sgf}
 \moves*{F5} % Continues with 7 (Black), somewhere else.
\end{goban}
```

`from` and `to` count the moves of the file. The number that is shown can be different: the `MN` property of the file changes it (the following moves continue from there), and so does `restart`. In the following examples, `variations.sgf` is a 7×7 game with two branches, marks and `MN[10]` on the fourth move of the main line.

`/pgfgo/sgf/variation` = ⟨*numbers*⟩ (no default, initially `the main line`)

Chooses a variation: at each branch of the game, in order, the given variation is taken (1 is the main one). For example, `variation = 2.1` takes the second variation at the first branch and the first one at the second. When the list ends, the first variation is followed. If a variation does not exist, a warning is produced.

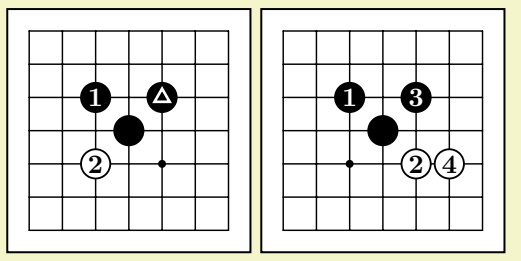



```
\begin{goban}[sgf size = variations.sgf]
 \sgf[variation = 2]{variations.sgf}
\end{goban}

\begin{goban}[sgf size = variations.sgf]
 \sgf[variation = 1.2]{variations.sgf}
\end{goban}
```

`/pgfgo/sgf/marks` =⟨*boolean*⟩ (default `true`, initially `true`)

Draws the marks of the file (`TR`, `SQ`, `CR`, `MA`, `SL` and the labels of `LB`), the arrows (`AR`) and the lines (`LN`) of the last node that is shown, and dims the points of `DD` (which stay dimmed until the next `DD`; p. 101). Each mark takes the color of the stone on that point, so that it can be seen, and replaces the number of the move. The territory of the file (`TB` and `TW`) is drawn as that of `\territory` (p. 55) and counts for `\pgfgoscore`.

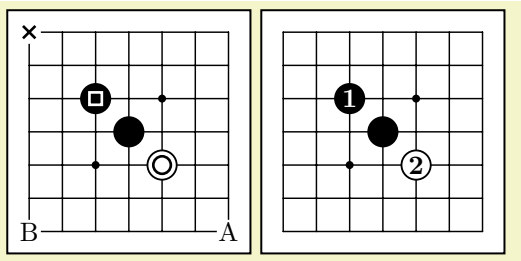


```
\begin{goban}[sgf size = variations.sgf]
 \sgf[to = 2]{variations.sgf}
\end{goban}


\begin{goban}[sgf size = variations.sgf]
 \sgf[to = 2, marks = false]{variations.sgf}
\end{goban}
```

`/pgfgo/sgf/step` = ⟨*number*⟩ or ⟨*list of numbers*⟩ (no default, initially `100`)

The size of the stretches in which `restart` restarts the numbering. With a list, each number is the size of a stretch, and the last one is repeated: with `step = {50, 100}`, the first stretch has 50 moves and the others 100. It is the same *key* as `/pgfgo/sgf diagrams/step`, where each stretch is a diagram.

`/pgfgo/sgf/restart` =⟨*restart options*⟩ (default `true`)

From the second stretch of `step` moves on, each one is numbered from 1 (or from `restart/from`), as books do: with `step = 100, restart`, move 101 is shown as 1. The first stretch keeps the numbers of the game. `\sgfanimation` and `\sgfdiagrams` have the same options.

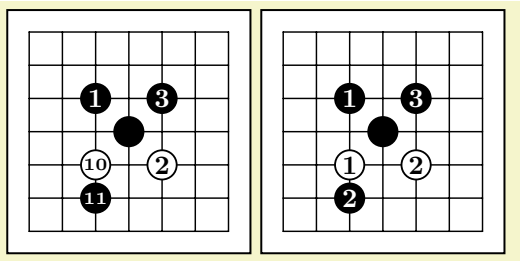

```
\begin{goban}[sgf size = variations.sgf]
 \sgf[]{variations.sgf}
\end{goban}

\begin{goban}[sgf size = variations.sgf]
 \sgf[step = 3, restart]{variations.sgf}
\end{goban}
```

/pgfgo/sgf/restart/true (no value)

Restarts the numbering in each stretch.

/pgfgo/sgf/restart/false (no value)


Does not restart it: the moves have the numbers of the game (with `MN`).

/pgfgo/sgf/restart/auto (no value)

Does what the file asks for with `PM`: with `PM[2]`, the numbering restarts every 100 moves, whatever `step` is (move 101 is shown as 1); otherwise, it does not restart. It is the initial value.

/pgfgo/sgf/restart/from = ⟨*number*⟩ (no default, initially `1`)


The number of the first move of each stretch, from the second one on. It also turns `restart` on. With `step = 99` and `restart = {from = 0}`, move 100 is shown as 0, 101 as 1, and so on.



```
\begin{goban}[sgf size = variations.sgf]
 \sgf[step = 3, restart = {from = 0}]{variations.sgf}
\end{goban}
```

/pgfgo/sgf/numbers =⟨*true, false or auto*⟩ (default `true`, initially `auto`)


With `false`, the moves are drawn without numbers. With `auto`, it does what the file asks for with `PM`: with `PM[0]`, they are not numbered. `\sgfdiagrams` has its own `numbers` *key*, and `\sgfproblem` always numbers them.



```
\begin{goban}[sgf size = variations.sgf]
 \sgf[numbers = false]{variations.sgf}
\end{goban}
```

/pgfgo/sgf/last mark = ⟨*mark options*⟩ or false (no default, initially false)

Marks the last move shown, with the options of a mark (circle, triangle, custom = ..., etc.). A pass is not marked, and neither is a point the file already marks. The mark goes over the number: it is mostly useful with numbers = false.




```
\begin{goban}[sgf size = variations.sgf]
 \sgf[numbers = false, last mark = circle]{variations.sgf}
\end{goban}
```

/pgfgo/sgf/game = ⟨*number*⟩ (no default, initially 1)

An SGF file can have several games (a collection). It chooses which one is read; if it does not exist, the first one is read with a warning. It also applies to \sgfanimation, \sgfdiagrams, \sgfcomment, \sgfinfo and sgf size, which have their own game *key*; for the whole document, \pgfgoset{sgf = {game = 2}}.

/pgfgo/sgf/variations =⟨*none, children, siblings or auto*⟩ (default auto, initially none)

Marks with letters the variations of the last move that is shown: with children, the moves that can follow; with siblings, the alternatives to that move (the letter replaces its number). auto does what the file asks for with ST. They are only marked if there is more than one.




```
\begin{goban}[sgf size = variations.sgf]
 \sgf[to = 1, marks = false, variations = children]{variations.sgf}
\end{goban}
```

\sgf also reads PL (who plays next: \moves goes on with that color) and CA (the charset of the file; see sgf charset).

/pgfgo/sgf charset = ⟨*charset*⟩ (no default, initially auto)

Charset of the SGF files that are not in UTF-8, for every command that reads files. With auto, it is the one the file gives with CA or, if it gives none, Latin-1 (the default of SGF). Latin-1, GBK (and GB2312), Big5, Shift_JIS, EUC-JP and EUC-KR are read; the names ignore case and signs (shift-jis and EUC_KR work too). A file that is valid UTF-8 is always read as UTF-8, even if CA says otherwise.

Many files from Asian servers do not give their charset; to read them, for example, \pgfgoset{sgf charset = GBK}. Another charset produces a warning, and the file is read as Latin-1: it must be converted to UTF-8 first, for example with iconv -f KOI8-R -t UTF-8 game.sgf > game-utf8.sgf.

To write the comments in Chinese, Japanese or Korean, the package for that language is needed too: ctex, luatexja or luatexko. Examples 14, 18 and 19 in doc/examples show a commented game in each one.

/pgfgo/sgf = ⟨*sgf options*⟩ (no default)

Options of every \sgf in the document, for example \pgfgoset{sgf = {variations}}.

\sgfinfo[⟨*options*⟩]{⟨*file*⟩}{⟨*property*⟩}

Writes a property of the root of the game, for example PB and PW (the players), RE (the result), KM (the komi) or DT (the date). If it is missing, it writes nothing. It can be used outside goban.

Ann (Black) against Bob (White), komi 6.5. Result: B+R.

```
\sgfinfo{variations.sgf}{PB} (Black) against \sgfinfo{variations.sgf}{PW} (White), komi \sgfinfo{variations.sgf}{KM}. R
```

`\sgfcomment[`⟨*options*⟩`]{`⟨*file*⟩`}{`⟨*move*⟩`}`

Writes the comment of a move of the file (`0`: the one before the first move): the name of the node (`N`), in bold; the annotations of the move (`TE`, `BM`, `DO`, `IT`) and of the position (`GB`, `GW`, `DM`, `UC`); and the comment (`C`). The annotations are written with the texts of `/pgfgo/sgf annotations`. Values (`V`) and hotspots (`HO`), which are meant for the game tree, are not written. It can be used outside `goban`. `\sgfanimation` and `\sgfdiagrams` write the comments in the same way.

Move 7: Tesuji. Black captures.

```
Move 7: \sgfcomment{game.sgf}{7}
```

`/pgfgo/sgf info/game` = ⟨*number*⟩ (no default, initially `1`)

Like `/pgfgo/sgf/game`, for `\sgfinfo`.

`/pgfgo/sgf comment/game` = ⟨*number*⟩ (no default, initially `1`)

Like `/pgfgo/sgf/game`.

`/pgfgo/sgf comment/variation` = ⟨*numbers*⟩ (no default, initially `the main line`)

Like `/pgfgo/sgf/variation`.

Bad move. Wrong: White lives.

```
\sgfcomment[variation = 2]{problem.sgf}{1}
```

`/pgfgo/sgf comment/annotations` =⟨*boolean*⟩ (default `true`, initially `true`)

Writes the name and the annotations. With `false`, only the comment.

With: Tesuji. Black captures. Without: Black captures.

```
With: \sgfcomment{game.sgf}{7}
\quad Without: \sgfcomment[annotations = false]{game.sgf}{7}
```

The texts of the annotations are in the language of the document (p. 13), and they can be changed for the whole document with `\pgfgoset{sgf annotations = {...}}`, for example `bad move = Mala jugada`. The emphasized annotations of `DM` and `UC` use the same text.

`/pgfgo/sgf annotations/tesuji` = ⟨*text*⟩ (no default, initially `Tesuji or its translation`)

Text of `TE`.

Good move. Black captures.

```
\pgfgoset{sgf annotations = {tesuji = Good move}}
\sgfcomment{game.sgf}{7}
```

`/pgfgo/sgf annotations/very good tesuji` = ⟨*text*⟩ (no default, initially `Very good tesuji or its translation`)

Text of `TE[2]`.

`/pgfgo/sgf annotations/bad move` = ⟨*text*⟩ (no default, initially `Bad move or its translation`)
Text of `BM`.

`/pgfgo/sgf annotations/very bad move` = ⟨*text*⟩ (no default, initially `Very bad move or its translation`)
Text of `BM[2]`.

`/pgfgo/sgf annotations/doubtful` = ⟨*text*⟩ (no default, initially `Doubtful move or its translation`)
Text of `DO`.

`/pgfgo/sgf annotations/interesting` = ⟨*text*⟩ (no default, initially `Interesting move or its translation`)
Text of `IT`.

`/pgfgo/sgf annotations/good for black` = ⟨*text*⟩ (no default, initially `Good for Black or its translation`)
Text of `GB`.

`/pgfgo/sgf annotations/very good for black` = ⟨*text*⟩ (no default, initially `Very good for Black or its translation`)
Text of `GB[2]`.

`/pgfgo/sgf annotations/good for white` = ⟨*text*⟩ (no default, initially `Good for White or its translation`)
Text of `GW`.


`/pgfgo/sgf annotations/very good for white` = ⟨*text*⟩ (no default, initially `Very good for White or its translation`)
Text of `GW[2]`.

`/pgfgo/sgf annotations/even` = ⟨*text*⟩ (no default, initially `Even position or its translation`)
Text of `DM`.

`/pgfgo/sgf annotations/unclear` = ⟨*text*⟩ (no default, initially `Unclear position or its translation`)
Text of `UC`.

`\sgfanimation[`⟨*options*⟩`]{`⟨*file*⟩`}`
Steps through the game with the `animate` package: it draws one `goban` per move, and the `animate` buttons go forward, back or play it. Frame $k$ shows the position after move $k$; frame 0, the position before the first move. It is used outside `goban`. The boards have the size of the game (`SZ`), unless `goban` gives another one. It needs `\usepackage{animate}` and two runs.

`animate` animations work in Acrobat Reader and in a few other viewers (Foxit, PDF-XChange). Other viewers only show the first frame. These options can be set for the whole document with `\pgfgoset{sgf animation = {...}}`.

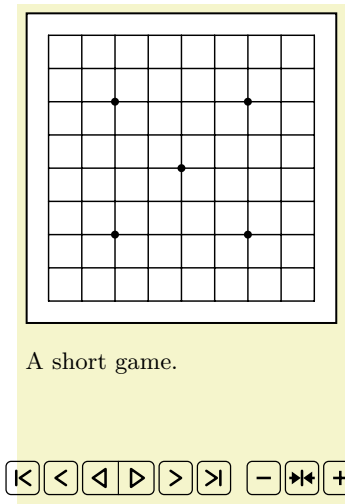

A short game.

```
\sgfanimation[comments, goban = {captures}]{game.sgf}
```

/pgfgo/sgf animation/from = ⟨*number*⟩ (no default, initially 0)

First frame.

/pgfgo/sgf animation/to = ⟨*number*⟩ or last (no default, initially last)

Last frame. With last (or -1), the frame of the last move.

/pgfgo/sgf animation/fps = ⟨*number*⟩ (no default, initially 1)

Frames per second when playing.

/pgfgo/sgf animation/goban = ⟨*goban options*⟩ (no default)


Options of every board, as in \begin{goban}[...].

/pgfgo/sgf animation/animate = ⟨*animate options*⟩ (no default, initially controls)

Options of the animateinline environment of animate, for example controls, loop.

/pgfgo/sgf animation/numbers =⟨*boolean*⟩ (default true, initially false)


Numbers every move, as \sgf does. Without numbers, moves have no numbers and the last one is marked.

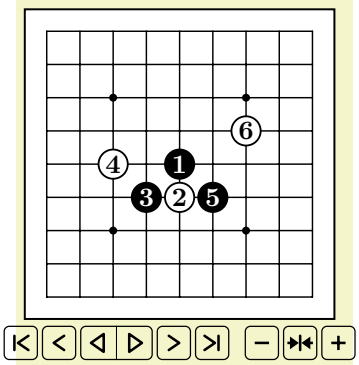


```
\sgfanimation[from = 6, to = 8, numbers, goban = {captures}]{game.sgf}
```

/pgfgo/sgf animation/last mark = ⟨*mark options or false*⟩ (no default, initially circle)

Mark of the last move, in the colour of the player who made it. With false, the last move is not marked. It is not used with numbers, nor when the file already marks that point.

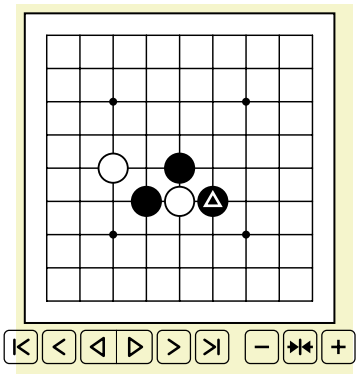

```
\sgfanimation[from = 5, to = 7, last mark = triangle, fps = 2,
 animate = {controls, loop}, goban = {captures}]{game.sgf}
```

/pgfgo/sgf animation/comments =⟨*comments options*⟩ (default `true`)

Shows the comment (`C`) of the move below the board. The one of frame 0 is the comment of the nodes before the first move. It is turned on with `comments` or `comments = true` and off with `false` (the initial value); `height` and `font` do not turn it on: `comments = {true, height = 6em}`.

/pgfgo/sgf animation/comments/true (style, no value)

Shows the comments.

/pgfgo/sgf animation/comments/false (style, no value)


Does not show the comments. It is the initial value.

/pgfgo/sgf animation/comments/height = ⟨*dimension*⟩ (no default, initially `4em`)

Height of the space for the comments. It is the same in every frame, so that frames do not change size.

/pgfgo/sgf animation/comments/font = ⟨*font commands*⟩ (no default, initially `\small`)


Font of the comments.

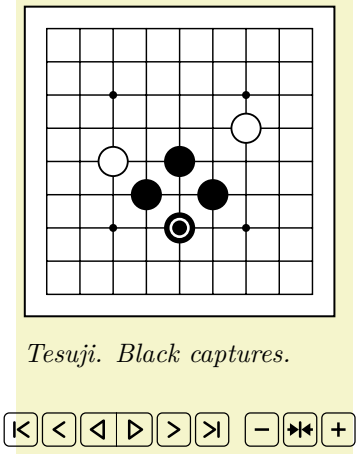


```
\sgfanimation[from = 7, to = 9, goban = {captures},
 comments = {true, height = 2.5em, font = \itshape}]{game.sgf}
```

/pgfgo/sgf animation/variation = ⟨*numbers*⟩ (no default, initially `the main line`)

Like `/pgfgo/sgf/variation`: the animation follows the line that leads to that variation.

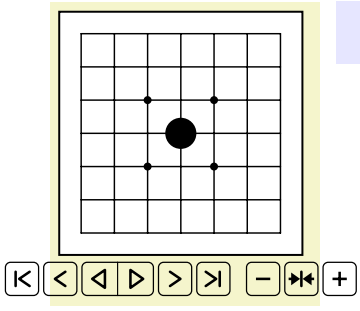

```
\sgfanimation[variation = 2, numbers]{variations.sgf}
```

`/pgfgo/sgf animation/marks` =⟨*boolean*⟩ (default `true`, initially `true`)

Like `/pgfgo/sgf/marks`: each frame shows the marks of its move.

`/pgfgo/sgf animation/step` = ⟨*number*⟩ or ⟨*list of numbers*⟩ (no default, initially `100`)

Like `/pgfgo/sgf/step`.

`/pgfgo/sgf animation/restart` =⟨*restart options*⟩ (default `true`)

Like `/pgfgo/sgf/restart`.

`/pgfgo/sgf animation/restart/true` (no value)

Like `/pgfgo/sgf/restart/true`.

`/pgfgo/sgf animation/restart/false` (no value)

Like `/pgfgo/sgf/restart/false`.

`/pgfgo/sgf animation/restart/auto` (no value)

Like `/pgfgo/sgf/restart/auto`. It is the initial value.

`/pgfgo/sgf animation/restart/from` = ⟨*number*⟩ (no default, initially `1`)

Like `/pgfgo/sgf/restart/from`.

`/pgfgo/sgf animation/annotations` =⟨*boolean*⟩ (default `true`, initially `true`)

With `comments`, it also writes the name and the annotations of each move, like `\sgfcomment`.

`/pgfgo/sgf animation/game` = ⟨*number*⟩ (no default, initially `1`)

Like `/pgfgo/sgf/game`.

`/pgfgo/sgf animation/view` =⟨*boolean*⟩ (default `true`, initially `true`)

If the file has a view (`VW`), the boards only show that part, like `sgf view`. All the frames have the same board: if the view changes during the game, the board covers the views of all the frames (and if one of them shows the whole board, the whole board is shown).

`/pgfgo/sgf animation/layers` =⟨*boolean*⟩ (default `true`, initially `true`)

Builds the animation by layers: the board is drawn only once, and so is every stone, on a transparency that `animate` shows while the stone stays on the board (with the `timeline` option of `animate`). The only things drawn in every frame are the things that change: the mark of the last move, the marks of the file and the comment. So the PDF grows with the number of moves and not with its square: a 200-move game takes less than 1 MB instead of more than 10 MB, and it also compiles faster. With `layers = false`, every frame is a whole `goban`. The `timeline` is saved in an auxiliary file, `<jobname>-pgfgo-<n>.tln`.

`\sgfdiagrams[`⟨*options*⟩`]{`⟨*file*⟩`}`

Draws the game as books do: one diagram every `step` moves (1–50, 51–100, etc.). Each diagram starts from the real position, with the earlier moves without numbers and their captures; stones captured within the diagram are not removed (they are removed in the next one). Below each one go its caption and its "N at M" notes (p. 61). It is used outside `goban`. The options can be set for the whole document with `\pgfgoset{sgf diagrams = {...}}`.

```
\sgfdiagrams[step = 5]{game.sgf}
```





Diagram 1 (1–5)





Diagram 2 (6–10)

/pgfgo/sgf diagrams/step = ⟨*number*⟩ or ⟨*list of numbers*⟩ (no default, initially `50`)

Number of moves of each diagram. With a list, the first diagram has as many moves as the first number, the second one as the second number, and so on, and the last number is repeated: with `step = {5, 10, 3}`, the diagrams have 5, 10, 3, 3, 3... moves.

/pgfgo/sgf diagrams/from = ⟨*number*⟩ (no default, initially `1`)

First move. The diagrams are the same as without `from`, with the same number: only the ones with moves from `from` on are drawn, and the first one starts at `from`. With `step = 50` and `from = 120`, the first one is "Diagram 3 (120–150)".

/pgfgo/sgf diagrams/to = ⟨*number*⟩ or `last` (no default, initially `last`)

Last move. With `last` (or `-1`), the last one of the game.

/pgfgo/sgf diagrams/numbers =⟨*boolean*⟩ (default `true`, initially `true`)

With `false`, the moves of each diagram are drawn without numbers (the "N at M" notes still use the numbers of the game).

/pgfgo/sgf diagrams/last mark = ⟨*mark options*⟩ or `false` (no default, initially `false`)

Like `/pgfgo/sgf/last mark`, on each diagram.

```
\sgfdiagrams[step = 5, to = 10, numbers = false, last mark = circle]{game.sgf}
```




Diagram 1 (1–5)




Diagram 2 (6–10)

/pgfgo/sgf diagrams/restart =⟨*restart options*⟩ (default `true`)

Like `/pgfgo/sgf/restart`, with one diagram per stretch: from the second diagram on, each one is numbered from 1 (or from `restart/from`), as some books do. The first diagram keeps the numbers of the game.

```
\sgfdiagrams[step = {2, 3}, restart = {from = 0}]{game.sgf}
```





Diagram 1 (1–2)





Diagram 2 (3–5)





Diagram 3 (6–8)

/pgfgo/sgf diagrams/restart/true (no value)

Restarts the numbering in each diagram.

/pgfgo/sgf diagrams/restart/false (no value)

Does not restart it: the moves have the numbers of the game.

/pgfgo/sgf diagrams/restart/auto (no value)

Like /pgfgo/sgf/restart/auto: with PM[2], every 100 moves, whatever the diagrams are. It is the initial value.

/pgfgo/sgf diagrams/restart/from = ⟨*number*⟩ (no default, initially 1)

The number of the first move of each diagram, from the second one on. It also turns restart on. With step = 99 and restart = {from = 0}, the first diagram goes from 1 to 99, and in the second one move 100 is shown as 0, 101 as 1, and so on.

/pgfgo/sgf diagrams/notes =⟨*boolean*⟩ (default true, initially true)

Writes the "N at M" notes below each diagram.

/pgfgo/sgf diagrams/title = ⟨*text*⟩ (no default, initially Diagram or its translation)

Word of the caption: "Diagram 2 (51–100)".

/pgfgo/sgf diagrams/caption = ⟨*caption options*⟩ (no default)

Options of the caption and the notes.

/pgfgo/sgf diagrams/caption/font = ⟨*font commands*⟩ (no default, initially \small)

Font of the caption and the notes: caption = {font = \itshape}.

```
\sgfdiagrams[from = 6, title = Figure, caption = {font = \itshape},
 goban = {label = {at = {north, west}}}]{game.sgf}
```





*Figure 1 (6–10)*

/pgfgo/sgf diagrams/goban = ⟨*goban options*⟩ (no default)

Options of every board. By default, the boards have the size of the game and use captures and notes.

/pgfgo/sgf diagrams/layout = ⟨*layout options*⟩ (no default)

How the diagrams are laid out: options of /pgfgo/layout (p. 90) only for \sgfdiagrams. For example, layout = {columns = 3}.

/pgfgo/sgf diagrams/variation = ⟨*numbers*⟩ (no default, initially the main line)

Like /pgfgo/sgf/variation.

/pgfgo/sgf diagrams/comments =⟨*boolean*⟩ (default true, initially false)

Writes below each diagram the comments of its moves, like \sgfcomment, each one with the number of the move.

/pgfgo/sgf diagrams/annotations =⟨*boolean*⟩ (default true, initially true)

With comments, it also writes the name and the annotations of each move.

```
\sgfdiagrams[step = 10, comments]{game.sgf}
\sgfdiagrams[step = 10, comments, annotations = false]{game.sgf}
```




Diagram 1 (1–10)
**7**: Tesuji. Black captures.




Diagram 1 (1–10)
**7**: Black captures.

`/pgfgo/sgf diagrams/figures` =⟨*boolean*⟩ (default `true`, initially `true`)

If the file marks figures (`FG`), each figure is a diagram, with its name as caption, instead of one every `step` moves.

`/pgfgo/sgf diagrams/view` =⟨*boolean*⟩ (default `true`, initially `true`)

If the file has a view (`VW`), each diagram only shows that part, like `sgf view`. If the view changes during the game, each diagram covers the views of its moves.

`/pgfgo/sgf diagrams/game` = ⟨*number*⟩ (no default, initially `1`)

Like `/pgfgo/sgf/game`.

`/pgfgo/sgf diagrams/result` =⟨*result options*⟩ (default `true`)

Writes below the last diagram, if it reaches the end of the game, the result (`RE`) and, if the file marks the territory (`TB`, `TW`), the score of each player: "Result: Black wins by 0.5 points (Black 6, White 5.5)". The score is counted as with `\pgfgoscore` (p. 55), with the komi of the file (`KM`). It is turned off with `result = false`; `title` and `format` do not turn it on.

`/pgfgo/sgf diagrams/result/true` (style, no value)

Writes the result. It is the initial value.

`/pgfgo/sgf diagrams/result/false` (style, no value)

Does not write the result.

`/pgfgo/sgf diagrams/result/title` = ⟨*text*⟩ (no default, initially `Result or its translation`)

Word before the result.

`/pgfgo/sgf diagrams/result/format` = ⟨*text or raw*⟩ (no default, initially `text`)

How the result is written. `text`: in words, in the language of the document (p. 13), "Black wins by resignation"; `raw`: as it is in the file, "B+R". With `text`, `0` or `Draw` (draw), `Void` (no result), `?` (unknown) and `B+` or `W+` followed by nothing, by the difference, by `R` or `Resign`, by `T` or `Time`, or by `F` or `Forfeit` are understood. Any other result is written as it is.

`/pgfgo/sgf diagrams/black name` = ⟨*text*⟩ (no default, initially `Black or its translation`)

Name of Black in the score and in the result.

`/pgfgo/sgf diagrams/white name` = ⟨*text*⟩ (no default, initially `White or its translation`)

Name of White in the score and in the result.

```
\sgfdiagrams[result = {title = Final, format = raw}]{variations.sgf}
\sgfdiagrams[black name = Ann, white name = Bob]{variations.sgf}
```





Diagram 1 (1–5)
Final: B+R





Diagram 1 (1–5)
Result: Ann wins by resignation

`\pgfgowinner`

In the texts of the result (`\pgfgodefinelanguage`), the name of the winner: `black name` or `white name`.


`\pgfgopoints`

In the texts of the result, the difference in points, as it is in the file.


`\sgfproblem[`⟨*options*⟩`]{`⟨*file*⟩`}`

Draws a problem (tsumego). First, the statement: the initial position with its marks, who plays (`PL`, or the color of the first move) and the comment at the start. Then, one diagram for each line of the tree of the file (each variation of the solution, right or wrong), numbered from 1, with its "N at M" notes and the comments and annotations of its moves, which usually say whether the variation is right. The diagrams are drawn like those of `\sgfdiagrams`. If the file has no view (`VW`), only the part of the board that the problem uses is shown. It is used outside `goban`. The options can be set for the whole document with `\pgfgoset{sgf problem = {...}}`.


```
\sgfproblem[title = Problem 1]{problem.sgf}
```




Problem 1: Black to play
Black to kill.





Variation 1
**1**: Tesuji. Correct: the vital point.




Variation 2
**1**: Tesuji. Correct: the vital point.
**3**: White has only one eye.




Variation 3
**1**: Bad move. Wrong: White lives.




Variation 4
**1**: Wrong.


`/pgfgo/sgf problem/statement =`⟨*true, false or alone*⟩ (default `true`, initially `true`)

Draws the statement. With `alone`, the statement goes alone in its row, centered, and the variations below.

`/pgfgo/sgf problem/solutions =`⟨*boolean*⟩ (default `true`, initially `true`)

Draws the variations. With `solutions = false`, only the statement is left, to put the solutions somewhere else (for example, with `statement = false` at the end of the chapter).

```
\sgfproblem[solutions = false, title = Problem 2]{problem.sgf}
```



Problem 2: Black to play
Black to kill.

`/pgfgo/sgf problem/title` = ⟨*text*⟩ (no default, initially `empty`)

Beginning of the caption of the statement: "Problem 1: Black to play".

`/pgfgo/sgf problem/variation title` = ⟨*text*⟩ (no default, initially `Variation or its translation`)

Word of the caption of each variation: "Variation 2".

`/pgfgo/sgf problem/black to play` = ⟨*text*⟩ (no default, initially `Black to play or its translation`)

Text of the statement when Black plays.

`/pgfgo/sgf problem/white to play` = ⟨*text*⟩ (no default, initially `White to play or its translation`)

Text of the statement when White plays.

`/pgfgo/sgf problem/comments` =⟨*boolean*⟩ (default `true`, initially `true`)

Writes the comment at the start below the statement, and those of each variation below its diagram, like `/pgfgo/sgf diagrams/comments`.

`/pgfgo/sgf problem/annotations` =⟨*boolean*⟩ (default `true`, initially `true`)

With `comments`, it also writes the name and the annotations of each move (`TE`, `BM`, etc.).

`/pgfgo/sgf problem/notes` =⟨*boolean*⟩ (default `true`, initially `true`)

Writes the "N at M" notes of each variation.


`/pgfgo/sgf problem/caption` = ⟨*caption options*⟩ (no default)

Options of the captions, the notes and the comments.


`/pgfgo/sgf problem/caption/font` = ⟨*font commands*⟩ (no default, initially `\small`)

Font of the captions, the notes and the comments.


```
\sgfproblem[statement = alone, comments = false, notes = false,
 caption = {font = \itshape}]{problem.sgf}
```




*Black to play*




*Variation 1*



*Variation 2*



*Variation 3*



*Variation 4*

`/pgfgo/sgf problem/goban` = ⟨*goban options*⟩ (no default)

Options of every board, like `/pgfgo/sgf diagrams/goban`.

`/pgfgo/sgf problem/layout` = ⟨*layout options*⟩ (no default)

How the statement and the variations are laid out: options of `/pgfgo/layout` (p. 90) only for `\sgfproblem`.

`/pgfgo/sgf problem/view` =⟨*boolean*⟩ (default `true`, initially `true`)

If the file has a view (`VW`) at the start, all the diagrams show that part.


`/pgfgo/sgf problem/crop` =⟨*boolean*⟩ (default `true`, initially `true`)

If the view of the file is not used, it only shows the part of the board with stones, moves or marks in some line of the problem, plus `margin` lines. A side that is two lines or less from the edge reaches the edge. It is the same in all the diagrams. With `crop = false`, the whole board is shown.

`/pgfgo/sgf problem/margin` = ⟨*number*⟩ (no default, initially `1`)

Lines that `crop` adds around the problem.

```
\sgfproblem[solutions = false, margin = 3]{problem.sgf}
```



Black to play

Black to kill.

`/pgfgo/sgf problem/game` = ⟨*number*⟩ (no default, initially `1`)

Like `/pgfgo/sgf/game`: in a collection, the problem that is drawn.

## 5.4 Layout of the Diagrams

`\sgfdiagrams` and `\sgfproblem` draw several diagrams. By default they go in the paragraph, side by side, and move to the next line when they do not fit. With `columns`, they go in a grid of columns of the same width: each row is a separate line (the page can break between rows), the boards of a row are aligned at the top and an incomplete row leaves its last columns empty. With `fit`, the boards are also scaled to fill the width of their column.

```
\sgfdiagrams[step = 2, to = 6, layout = {columns = 3, fit}]{game.sgf}
```

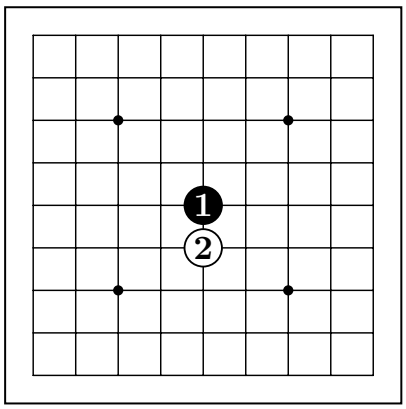



Diagram 1 (1–2)

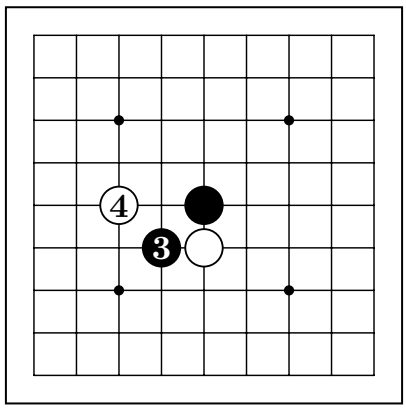



Diagram 2 (3–4)

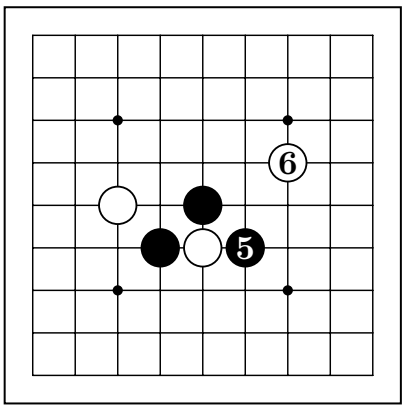



Diagram 3 (5–6)

`/pgfgo/layout` = ⟨*layout options*⟩ (style, no default)

Layout options for the whole document, for example `\pgfgoset{layout = {columns = 3, fit}}`. For a single command, `/pgfgo/sgf diagrams/layout` and `/pgfgo/sgf problem/layout`; also for the whole document, `\pgfgoset{sgf diagrams = {layout = {...}}}`.

/pgfgo/layout/columns = ⟨*number or auto*⟩ (no default, initially `auto`)

Number of columns of the grid. With `auto`, the diagrams go in the paragraph, without a grid.

/pgfgo/layout/width = ⟨*dimension*⟩ (no default, initially `\linewidth`)

Width of the grid. If it is less than the width of the line, the grid is centered.

/pgfgo/layout/column sep = ⟨*dimension*⟩ (no default, initially `1em`)

Space between columns.

/pgfgo/layout/row sep = ⟨*skip*⟩ (no default, initially `\medskipamount`)

Space between rows.

/pgfgo/layout/fit =⟨*boolean*⟩ (default `true`, initially `false`)

Scales each board to fill the width of its column; it replaces the `scale` of the board. The lines keep their width. In `\sgfdiagrams` and `\sgfproblem`, all the boards use the scale that fills the column with the first one, so the stones have the same size in all of them. Only with `columns`.

/pgfgo/layout/align = ⟨*center, left or right*⟩ (no default, initially `center`)

Where each diagram goes within its column, with its caption and its notes. The comments are always aligned to the left.

```
\sgfdiagrams[step = 2, to = 6, layout = {columns = 2, width = 0.6\linewidth,
 column sep = 3em, row sep = 2em, align = left}]{game.sgf}
```





Diagram 1 (1–2)





Diagram 2 (3–4)





Diagram 3 (5–6)

`\begin{pgfgolayout}`[⟨*layout options*⟩]
⟨*environment contents*⟩
`\end{pgfgolayout}`

Lays out in a grid the `gobans` it contains, and the diagrams of the `\sgfdiagrams` and `\sgfproblem` it contains, in the order in which they appear. So boards drawn by hand and diagrams of different files can be put together in a grid. The options are those of `/pgfgo/layout`; the `layout` options of the commands inside are not used. There must be no text inside, only the boards and the commands. With `fit`, each `goban` is drawn several times to measure it: its contents should have no effects outside the board (for example, counters that are stepped).

```
\begin{pgfgolayout}[columns = 4, fit]
 \begin{goban}[5]\stones[b]{C3}\end{goban}
 \begin{goban}[5]\stones[w]{C3}\end{goban}
 \sgfdiagrams[step = 5]{game.sgf}
\end{pgfgolayout}
```

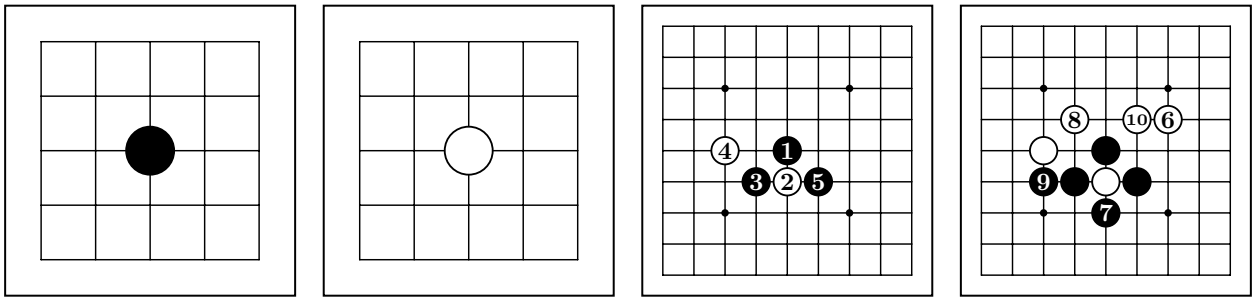



Diagram 1 (1–5) Diagram 2 (6–10)

## 5.5 Prisoners

PGFGO provides specific commands to represent prisoners, typically with reduced opacity to distinguish them from active stones.

`\prisoner[`⟨*options*⟩`]{`⟨*intersection*⟩`}`


Draws a prisoner stone at a specific intersection, with options to customize its style.

`\prisoners[`⟨*options*⟩`]{`⟨*intersection , intersection, ...*⟩`}`

Places multiple prisoner stones in a single line, efficient for showing captured groups.

`/pgfgo/prisoner=`⟨*stone options*⟩ (default `fill opacity = 0.5`)

Defines the characteristics of prisoner stones, with a default fill opacity of 0.5 to indicate their status. Other `\stone` options, such as color or size, can be applied. It applies to the prisoners of the three players; the style of each one (`/pgfgo/players/white/stone/prisoner`) comes after it.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2}
 \prisoners[b]{D3}
 \prisoner[w]{B4}
\end{goban}

\pgfgoset{prisoner = {fill = {opacity = 0.2}, line = {color = red}}}

\begin{goban}
 \stones[b]{C2}
 \prisoners[b]{D3}
 \prisoner[w]{B4}
\end{goban}
```

# 6 Marks

Marks are graphical elements placed at the intersections of the board to highlight specific positions, indicate points of interest, or number sequences without the need to add stones. PGFGO offers versatile commands and options to customize these marks, ranging from predefined shapes to custom labels.

`\mark[`⟨*options*⟩`]{`⟨*intersection*⟩`}`


Draws an individual mark at the specified intersection (e.g., "C3"). Options allow defining its shape, color, and other attributes.

`\marks[`⟨*options*⟩`]{`⟨*intersection , intersection, ...*⟩`}`

Similar to `\mark`, but applies the same mark to multiple intersections using the coordinate syntax.

`/pgfgo/mark =`⟨*options*⟩ (default `cross`)

Defines the type of mark to be placed, with a cross (”cross”) as the default value if no other option is specified.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark{C3}
\end{goban}
```

`/pgfgo/mark/circle` (no value)

Places a hollow circle as a mark.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[circle]{C3}
\end{goban}
```

`/pgfgo/mark/triangle` (no value)

Draws a hollow triangle.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[triangle]{C3}
\end{goban}
```

`/pgfgo/mark/square` (no value)

Places a hollow square.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[square]{C3}
\end{goban}
```

/pgfgo/mark/cross (no value)

Draws a cross.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[cross]{C3}
\end{goban}
```

/pgfgo/mark/filled square (no value)

Places a filled square.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[filled square]{C3}
\end{goban}
```

/pgfgo/mark/filled circle (no value)

Draws a filled circle.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[filled circle]{C3}
\end{goban}
```

/pgfgo/mark/t-circle (no value)

Places a small circle with a thicker border, specifically designed for marking territories.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[t-circle]{C3}
\end{goban}
```

/pgfgo/mark/t-square (no value)

Draws a small square with a thick border, similar to "t-circle," used to mark territories.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[t-square]{C3}
\end{goban}
```

/pgfgo/mark/hatched lines (no value)

Places a pattern of crossed (hatched) lines.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[hatched lines]{C3}
\end{goban}
```

/pgfgo/mark/sequence=⟨*options*⟩ (default `from = 1`)

Allows numbering a series of marks in order.




```
\begin{goban}[5, partial = B2:D4]
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \marks[sequence]{C3,B3,C4}
 \marks[sequence = {format = Alph}]{B2,D2,D4}
\end{goban}
```

/pgfgo/mark/sequence/true (no value)

Turns the sequence on. It is the same as `sequence` alone.

/pgfgo/mark/sequence/false (no value)


Turns the sequence off (for example, one turned on with `\pgfgoset`).

/pgfgo/mark/sequence/format = ⟨*format*⟩ (no default)

Turns the sequence on and chooses the number format. It is the same as `sequence, label = {format = ...}` (see `label/format`).

/pgfgo/mark/sequence/from=⟨*number*⟩ (no default)

Sets the starting number of a numbered mark sequence, allowing continuation from a specific point instead of 1.





```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \marks[sequence = {from = 3}]{C3,B3,C4}
\end{goban}
```

/pgfgo/mark/dim (no value)


Dims the point: it covers it with the color of the background of the board, translucent, over the stone and the grid. It is what `\sgf` draws for the `DD` property.



```
\begin{goban}[5]
 \stones[b]{B2, C3}\stone[w]{D4}
 \marks[dim]{A1:5, B2}
\end{goban}
```

/pgfgo/mark/custom=⟨*token list*⟩ (no default)

Allows defining a custom mark using text or symbols (e.g., "!" or "?") and even images.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[custom = {!}]{C3}
\end{goban}


\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[custom = {\tikz{\node[rounded corners, draw, inner sep = 1em, red]{\dots};}}]{C3}
\end{goban}
```

`\pgfgodefinemark[`⟨*options*⟩`]{`⟨*name*⟩`}{`⟨*pgf code*⟩`}`

Defines a new mark, called ⟨*name*⟩, which is used like the others: in `\marks`, in the `mark` option of stones and players, and in `\territory`. It is drawn on the same layers as the other marks; on an empty point, it covers the grid with a circle of the color of the background. A mark with the name of another one replaces it.

The ⟨*pgf code*⟩ is drawn with the origin on the point. Coordinates without units (those of `\pgfpointxy` and of Ti*k*Z) are measured in stone radii: `(0,0) circle (1)` has the size of the stone. The line color is `mark/line/color` of the player; the fill color, `mark/fill/color`; and the line width, `mark/line/width`. These two colors are also called `pgfgomarkline` and `pgfgomarkfill`. With `mark/scale`, the mark changes its size like the others.

With `\pgfgodefinemark[image = {file =` ⟨*file*⟩`, width =` ⟨*dimension*⟩`}]{`⟨*name*⟩`}`, without ⟨*pgf code*⟩, the mark is an image: see `image` below.



```
\pgfgodefinemark{diamond}{
 \pgfpathmoveto{\pgfpointxy{0}{0.7}}
 \pgfpathlineto{\pgfpointxy{0.7}{0}}
 \pgfpathlineto{\pgfpointxy{0}{-0.7}}
 \pgfpathlineto{\pgfpointxy{-0.7}{0}}
 \pgfpathclose
 \pgfusepath{fill, stroke}}
\pgfgodefinemark{slash}{\draw (-0.5,-0.5) -- (0.5,0.5);}
\pgfgodefinemark[image = {file = star.pdf}]{star}

\begin{goban}[5, partial = B2:D4]
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \marks[diamond]{C2, B4, B2}
 \marks[slash]{D3, C3}
 \marks[star]{D4}
\end{goban}
```

`/pgfgo/define mark/image` = ⟨*options*⟩ (no default)


The image (PNG, JPG or PDF) of a mark defined with `\pgfgodefinemark`. It is drawn centered on the point; the colors of the marks do not apply.

`/pgfgo/define mark/image/file` = ⟨*file*⟩ (no default)

The file of the image.

`/pgfgo/define mark/image/width` = ⟨*dimension*⟩ (no default, initially `1.2 stone radii`)

The width of the image; the height keeps the proportions. Without this key, the mark has the size of the circle (`circle`), and changes with the radius of the stones.




```
\pgfgodefinemark[image = {file = star.pdf}]{star}
\pgfgodefinemark[image = {file = star.pdf, width = 0.6em}]{starlet}

\begin{goban}[5, partial = B2:D4]
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \marks[star]{C3, B4}
 \marks[starlet]{B3, D3}
\end{goban}
```

`/pgfgo/mark/scale` = ⟨*float*⟩ (no default, initially `1`)

The size of the mark compared with the usual one: the shapes, the images and the text.




```
\begin{goban}[5, partial = B2:D4]
 \stones[b]{C2}
 \marks[triangle, scale = 1.5]{C2, B3}
 \marks[circle, scale = 0.6]{D4}
\end{goban}
```

/pgfgo/mark/line = ⟨*options*⟩ (no default)

Controls the outline of the mark.

/pgfgo/mark/line/color = ⟨*color*⟩ (no default)

Defines the outline color of the mark.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[triangle, line = {color = red}]{C3}
\end{goban}
```

/pgfgo/mark/line/width = ⟨*dimension*⟩ (no default)

Adjusts the thickness of the mark's outline.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[triangle]{C3}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[triangle, line = {width = 0.1pt}]{C3}
\end{goban}
```

/pgfgo/mark/fill =⟨*options*⟩ (default `true`)

Controls the fill of the filled marks (`filled square`, `filled circle` and `hatched lines`).

/pgfgo/mark/fill/true (no value)


Filled marks are filled with `fill/color`. It is the initial value.

/pgfgo/mark/fill/false (no value)

Filled marks are not filled, so they are not seen.

/pgfgo/mark/fill/color = ⟨*color*⟩ (no default)

Sets the fill color of a mark (gray, initially).



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}


\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[filled circle, fill = {true, color = red}]{C3}
\end{goban}
```

/pgfgo/mark/label = ⟨*option*⟩ (no default)

Controls the appearance of labels for marks that have them.

/pgfgo/mark/label/color = ⟨*color*⟩ (no default)

Controls the color of the text or symbol in custom marks (e.g., with `custom`).




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[custom = {!}, label = {color = red}]{C3}
\end{goban}
```

/pgfgo/mark/label/font = ⟨*font commands*⟩ (no default)

Font of the labels of marks (`sequence` and `custom`).



```
\pgfgoset{goban = {5, partial = B2:D4}}


\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \marks[sequence, label = {font = \itshape}]{C3,B3,C4}
\end{goban}
```

/pgfgo/mark/label/format=⟨*options*⟩ (no default, initially `arabic`)

Controls the numbering style of enumeration labels (e.g., `sequence`), with options such as Arabic numerals, letters, or Roman numerals.

/pgfgo/mark/label/format/arabic (no value)

Uses Arabic numerals for sequences.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \marks[label = {format = arabic}, sequence]{C3,B3,C4}
\end{goban}
```

/pgfgo/mark/label/format/alph (no value)

Uses lowercase letters for the sequence.




```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \marks[label = {format = alph}, sequence]{C3,B3,C4}
\end{goban}
```

/pgfgo/mark/label/format/Alph (no value)

Uses uppercase letters.





```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \marks[label = {format = Alph}, sequence]{C3,B3,C4}
\end{goban}
```

/pgfgo/mark/label/format/roman (no value)

Uses lowercase Roman numerals.





```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \marks[label = {format = roman}, sequence]{C3,B3,C4}
\end{goban}
```

/pgfgo/mark/label/format/Roman (no value)

Uses uppercase Roman numerals.





```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
\end{goban}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \marks[label = {format = Roman}, sequence]{C3,B3,C4}
\end{goban}
```

/pgfgo/mark/black (no value)

Applies the properties of the first player (black) to the mark.



```
\pgfgoset{goban = {5, partial = B2:D4}}

\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[triangle]{C3}
\end{goban}


\begin{goban}
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \mark[black, t-square]{C3}
\end{goban}
```

/pgfgo/mark/white (no value)

Applies the properties of the second player (white) to the mark.

/pgfgo/mark/neutral (no value)

Keeps the mark unassociated with any player.



```
\begin{goban}[5, partial = B2:D4]
 \stones[b]{C2,D3}
 \stone[w]{B4}
 \marks[b, t-square]{B2, C3}
 \marks[w, t-square]{D2, B3}
 \marks[n, t-square]{D4}
 \marks[b, triangle]{C2, D3}
 \marks[w, triangle]{B4}
\end{goban}
```

/pgfgo/mark/b (no value)

Short for `black`.

/pgfgo/mark/w (no value)

Short for `white`.

/pgfgo/mark/n (no value)

Short for `neutral`.

/pgfgo/mark/forget (no value)


`resume` does not bring this mark, even with `marks` (p. 62).

## 6.1 Arrows and Lines

Arrows and lines join two intersections. They are drawn above the stones, with a halo in the color of the background of the board that separates them from the stones and the grid. Like `\mark`, `\arrow` and `\line` only exist inside `goban`: outside, `\line` is still the LaTeX command. `\sgf` draws the arrows (`AR`) and lines (`LN`) of the file.

`\arrow[`⟨*options*⟩`]{`⟨*from*⟩`}{`⟨*to*⟩`}`


Draws an arrow from one intersection to another.



```
\begin{goban}[9]
 \stones[b]{C3, D3}\stone[w]{E5}
 \arrow{B3}{F3}
 \arrow[color = red, halo = false]{C7}{G9}
\end{goban}
```

`\line[`⟨*options*⟩`]{`⟨*from*⟩`}{`⟨*to*⟩`}`

Draws a line from one intersection to another.



```
\begin{goban}[9]
 \stones[b]{C3, D4}\stone[w]{E5}
 \line{C3}{G7}
 \line[color = blue, width = 2pt]{A9}{J9}
\end{goban}
```

/pgfgo/arrow/color=⟨*color*⟩ (no default, initially `black`)


Color of the arrow.

/pgfgo/arrow/width=⟨*dimension*⟩ (no default, initially `1.2pt`)

Width of the arrow. The tip grows with it.

/pgfgo/arrow/opacity=⟨*number*⟩ (no default, initially `1`)

Opacity of the arrow.




```
\begin{goban}[5]
 \stones[b]{C2, C4}\stone[w]{D3}
 \arrow[width = 0.4pt]{A1}{E1}
 \arrow[color = blue, width = 2.5pt]{A3}{E3}
 \arrow[color = red, opacity = 0.4, width = 2.5pt]{A5}{E5}
\end{goban}
```

/pgfgo/arrow/dash=⟨*solid, dashed or dotted*⟩ (no default, initially `solid`)

The stroke: solid, dashed or dotted. The halo and the tip are always solid.

/pgfgo/arrow/shorten=⟨*dimension*⟩ (no default, initially `0pt`)


Shortens both ends, for example so that the arrow does not cover the stones.



```
\begin{goban}[5]
 \stones[b]{B2}\stones[w]{D4}
 \arrow[shorten = 5pt]{B2}{D4}
 \arrow[dash = dashed, tips = both]{A5}{E5}
 \line[dash = dotted]{A1}{E1}
\end{goban}
```

/pgfgo/arrow/bend=⟨*angle*⟩ (no default, initially `0`)

Draws an arc instead of a straight line: the arrow leaves turned that angle to the left and arrives turned the same, like `bend left` in Ti*k*Z. With a negative angle, it bends to the right.




```
\begin{goban}[5]
 \stones[b]{B2}\stones[w]{D4}
 \arrow[bend = 40, shorten = 5pt]{B2}{D4}
 \line[bend = -30]{A1}{E1}
\end{goban}
```

/pgfgo/arrow/tip=⟨*arrow tip*⟩ (no default, initially `Stealth`)

The tip of the arrow, one of the tips of the `arrows.meta` library of Ti*k*Z, like `Latex` or `Triangle`.

/pgfgo/arrow/tips=⟨*end or both*⟩ (no default, initially `end`)

Where the tip goes: only at the end, or at both ends.



```
\begin{goban}[5]
 \arrow[tip = Latex]{A1}{E1}
 \arrow[tip = Triangle, tips = both]{A3}{E3}
 \arrow[tip = {Circle[open]}]{A5}{E5}
\end{goban}
```

/pgfgo/arrow/halo=⟨*halo options*⟩ (default `true`)

The halo around the arrow.

/pgfgo/arrow/halo/true (style, no value)

Draws the halo. It is the initial value.

/pgfgo/arrow/halo/false (style, no value)


Does not draw the halo.

/pgfgo/arrow/halo/color=⟨*color*⟩ (no default)

Color of the halo. Without this *key*, it is the color of the background of the board.

/pgfgo/arrow/halo/width=⟨*dimension*⟩ (no default, initially `0.8pt`)

Width of the halo on each side of the arrow.



```
\begin{goban}[5]
 \stones[b]{B1, B3, B5}\stones[w]{D1, D3, D5}
 \arrow[halo = false]{A1}{E1}
 \arrow{A3}{E3}
 \arrow[halo = {color = yellow, width = 2pt}]{A5}{E5}
\end{goban}
```

/pgfgo/arrow/forget (no value)

`resume` does not bring this arrow, even with `marks`.

Lines have the same options, except `tip`:

/pgfgo/line/color=⟨*color*⟩ (no default, initially `black`)

Like `/pgfgo/arrow/color`.

/pgfgo/line/width=⟨*dimension*⟩ (no default, initially `1.2pt`)

Like `/pgfgo/arrow/width`.

/pgfgo/line/opacity=⟨*number*⟩ (no default, initially `1`)

Like `/pgfgo/arrow/opacity`.

/pgfgo/line/dash=⟨*solid, dashed or dotted*⟩ (no default, initially `solid`)

Like `/pgfgo/arrow/dash`.

/pgfgo/line/shorten=⟨*dimension*⟩ (no default, initially `0pt`)

Like `/pgfgo/arrow/shorten`.

/pgfgo/line/bend=⟨*angle*⟩ (no default, initially `0`)

Like `/pgfgo/arrow/bend`.

/pgfgo/line/halo=⟨*halo options*⟩ (default `true`)

Like `/pgfgo/arrow/halo`.

/pgfgo/line/halo/true (style, no value)

Like `/pgfgo/arrow/halo/true`.

/pgfgo/line/halo/false (style, no value)

Like `/pgfgo/arrow/halo/false`.

/pgfgo/line/halo/color=⟨*color*⟩ (no default)

Like `/pgfgo/arrow/halo/color`.


/pgfgo/line/halo/width=⟨*dimension*⟩ (no default, initially `0.8pt`)

Like `/pgfgo/arrow/halo/width`.

/pgfgo/line/forget (no value)


Like `/pgfgo/arrow/forget`.

# 7 Other Examples

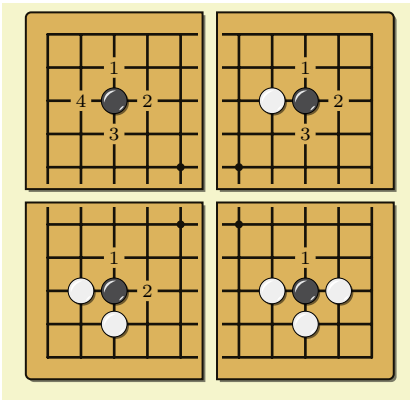


```
\setlength{\tabcolsep}{2pt}

\begin{tabular}{cc}
 \begin{goban}[partial = A9:E5]
  \stone[b]{C7}
  \marks[sequence]{C8, D7, C6, B7}
 \end{goban} &
 %
 \begin{goban}[partial = E9:I5]
  \stone[b]{G7}
  \stone[w]{F7}
  \marks[sequence]{G8, H7, G6}
 \end{goban} \\
 %
 \begin{goban}[partial = A1:E5]
  \stone[b]{C3}
  \stones[w]{B3,C2}
  \marks[sequence]{C4, D3}
 \end{goban} &
 %
 \begin{goban}[partial = E1:I5]
  \stone[b]{G3}
  \stones[w]{F3,G2, H3}
  \marks[sequence]{G4}
 \end{goban}\\
\end{tabular}
```

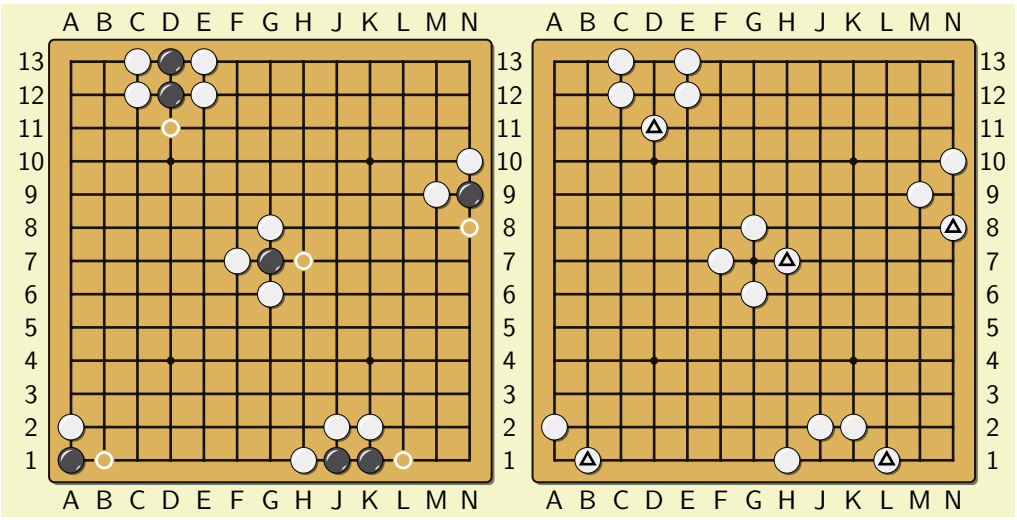



```
\pgfgoset{goban = {use i = false}}

\begin{goban}[13, label = {at = {all}}]
 \stones[b]{A1, J1, K1, G7, N9, D12, D13}
 \stones[w]{A2, H1, J2, K2, G6, F7, G8, M9, N10, C12, C13, E12, E13}
 \marks[circle, line = {color = white}]{B1, L1, N8, H7, D11}
\end{goban}
\begin{goban}[13, label = {at = {north, east, south}}]
 \stones[w]{A2, H1, J2, K2, G6, F7, G8, M9, N10, C12, C13, E12, E13}
 \stones[w,mark = triangle]{B1, L1, N8, H7, D11}
\end{goban}
```

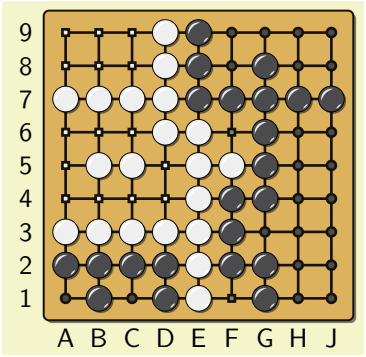



```
\pgfgoset{goban = {use i = false}}


\begin{goban}[9, label = {at = {south, west}}]
 \stones[b]{A2-|D1, B1, G1|-F2|-G4|-J7-|E9, G8}
 \stones[w]{E1|-D6|-A7, D 8:9, F5, B:C 5, A:D 3}
 \marks[b, t-circle]{J1 R H6, G3, F8 R J9; G8; A1, C1}
 \marks[b, t-square, white]{A9 R C8, A4 R D6; B:C 5, D6}
 \marks[t-square, neutral]{F1,F6}
\end{goban}
```




```
\begin{goban}[9, label = {at = {south, west}}]
 \stones[b]{C7}
 \stones[w]{B6,B7,C8,D7}
 \moves*{C6,C5,D6,E6,D5,D4,E5,F5,E4,E3}
\end{goban}
```



```
\begin{goban}[9, partial = A2:H9]
 \stones[b]{A7,B6,C8,C7}
 \stones[b, mark = triangle]{D6,D5,D4}
 \stones[w]{C3,C4,C5,C6,D7,E7,E6}
 \stone[w, mark = {custom = 1}]{E3}
 \marks[b, circle, line = {color = red!80!black}] {D3,E4, E5}
\end{goban}
```

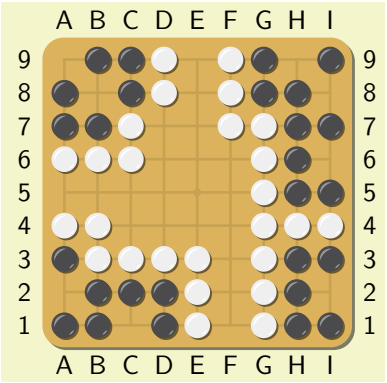



```
\pgfgoset{profile = pgfgosmooth}

\begin{goban}[label = {at = all}]
 \stones[b]{A8 |- B7, B9 -| C8, H:I 1:9, G8:9, A:D 1:2, A3; I2, I6, I8, H9, C1, A2, H:J4;}
 \stones[w]{E1 |- B3 |- A4, A6 -| C7 -| D9, G1 |- I4 -| G7 -| F9; D7;}
\end{goban}
```

# 8 Catalog

## 8.1 Profiles


### 8.1.1 default



```
\pgfgoset{profile = default}

\begin{goban}[partial = A1:G3]
 \moves*[from = 1]{A:F 3}
 \stones[w]{A1:2}
 \stones[b]{B1:2}
 \stones[n]{C1:2}
 \stone[w, mark = circle]{D1}
 \mark[w, circle]{D2}
 \stone[b, mark = circle]{E1}
 \mark[b, circle]{E2}
 \stone[n, mark = circle]{F1}
 \mark[n, circle]{F2}
 \mark[w, t-square]{G1}
 \mark[b, t-circle]{G2}
 \mark[n, t-square]{G3}
\end{goban}
```


### 8.1.2 pgfgo



```
\pgfgoset{profile = pgfgo}

\begin{goban}[partial = A1:G3]
 \moves*[from = 1]{A:F 3}
 \stones[w]{A1:2}
 \stones[b]{B1:2}
 \stones[n]{C1:2}
 \stone[w, mark = circle]{D1}
 \mark[w, circle]{D2}
 \stone[b, mark = circle]{E1}
 \mark[b, circle]{E2}
 \stone[n, mark = circle]{F1}
 \mark[n, circle]{F2}
 \mark[w, t-square]{G1}
 \mark[b, t-circle]{G2}
 \mark[n, t-square]{G3}
\end{goban}
```


### 8.1.3 pgfgosmooth



```
\pgfgoset{profile = pgfgosmooth}

\begin{goban}[partial = A1:G3]
 \moves*[from = 1]{A:F 3}
 \stones[w]{A1:2}
 \stones[b]{B1:2}
 \stones[n]{C1:2}
 \stone[w, mark = circle]{D1}
 \mark[w, circle]{D2}
 \stone[b, mark = circle]{E1}
 \mark[b, circle]{E2}
 \stone[n, mark = circle]{F1}
 \mark[n, circle]{F2}
 \mark[w, t-square]{G1}
 \mark[b, t-circle]{G2}
 \mark[n, t-square]{G3}
\end{goban}
```


### 8.1.4 wain



```
\pgfgoset{profile = wain}

\begin{goban}[partial = A1:G3]
 \moves*[from = 1]{A:F 3}
 \stones[w]{A1:2}
 \stones[b]{B1:2}
 \stones[n]{C1:2}
 \stone[w, mark = circle]{D1}
 \mark[w, circle]{D2}
 \stone[b, mark = circle]{E1}
 \mark[b, circle]{E2}
 \stone[n, mark = circle]{F1}
 \mark[n, circle]{F2}
 \mark[w, t-square]{G1}
 \mark[b, t-circle]{G2}
 \mark[n, t-square]{G3}
\end{goban}
```

### 8.1.5 simple




```
\pgfgoset{profile = simple}

\begin{goban}[partial = A1:G3]
 \moves*[from = 1]{A:F 3}
 \stones[w]{A1:2}
 \stones[b]{B1:2}
 \stones[n]{C1:2}
 \stone[w, mark = circle]{D1}
 \mark[w, circle]{D2}
 \stone[b, mark = circle]{E1}
 \mark[b, circle]{E2}
 \stone[n, mark = circle]{F1}
 \mark[n, circle]{F2}
 \mark[w, t-square]{F1}
 \mark[b, t-circle]{F1}
 \mark[n, t-square]{F1}
\end{goban}
```

# 9 Definitions of Stones and Boards

## 9.1 Stones and Players

### 9.1.1 pgfgo

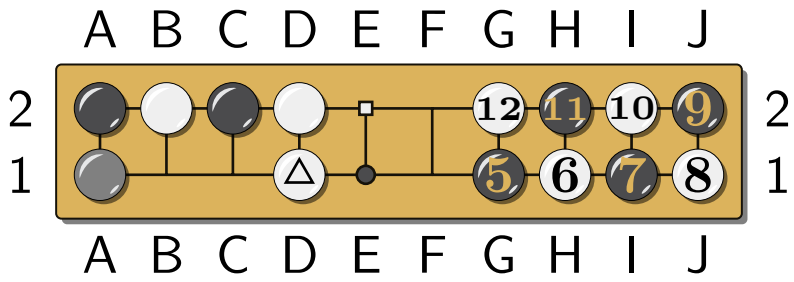


We declare all players and start by defining the appearance of the neutral one.


```
\pgfgodefineplayer{pgfgo-neutral}{
 stone = {
  line = {
   true,
   color = black,
   width = 0.3pt,
   opacity = 1,
  },
  fill = {
   true,
   color = gray,
   opacity = 1,
  },
  radius = 0.17cm,
  scale = 1,
  drop shadow = {true, opacity = 0.5, offset = 1pt, angle = -45},
  shine = {true, angle = 45, color = wainshade}
 },
 move = {
  label = {
   color = black,
   format = arabic,
  }
 },
 mark = {
  line = {
   color = black,
   width = 1pt,
  },
  fill = {true, color = gray},
  label = {
   color = black,
   format = arabic
  }
 }
}
```

Some properties such as line thickness, opacity, and others should be preserved for all stones, so we copy the neutral player template.

```
\pgfgodefineplayer[from = pgfgo-neutral]{pgfgo-white}{
 stone = {
  fill = {color = wainwhite},
  shine = {color = white}
 },
 move = {
  label = {
   color = black
  }
 },
 mark = {
  line  = {color = black},
  label = {color = black}
 }
}

\pgfgodefineplayer[from = pgfgo-neutral]{pgfgo-black}{
 stone = {
  fill = {
   color = wainblack
  }
 },
 move = {
  label = {
   color = pgfgo
  }
 },
 mark = {
  line = {
   color = pgfgo,
  },
  label = {color = black}
 }
}
```

### 9.1.2 pgfgosmooth

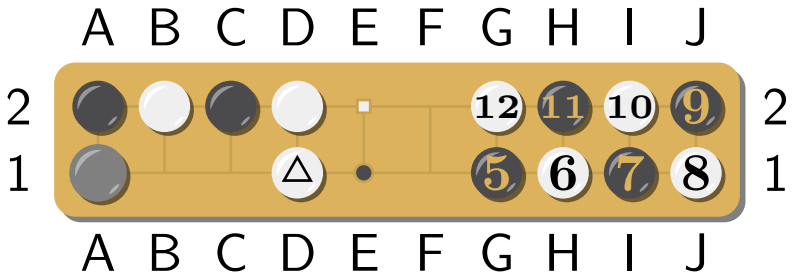



```
\pgfgodefineplayer[from = pgfgo-neutral]{pgfgosmooth-neutral}{
 stone = {
  line = false,
  radius = 0.19cm,
  shine = {opacity = 0.5}}
}
```

```
\pgfgodefineplayer[from = pgfgo-black]{pgfgosmooth-black}{
 stone = {line = false, shine = {opacity = 0.5}}
}
```

```
\pgfgodefineplayer[from = pgfgo-white]{pgfgosmooth-white}{
 stone = {line = false}
}
```

### 9.1.3 wain

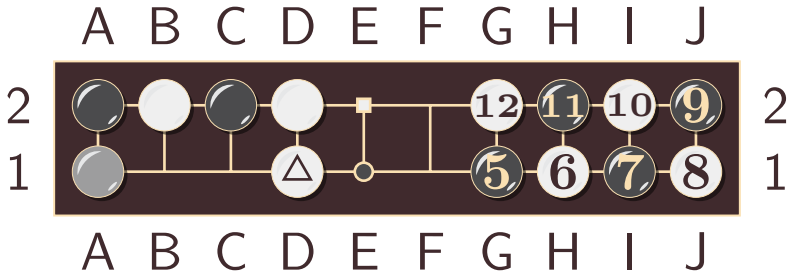


```
\definecolor{waingoban}{HTML}{402A2D}
\definecolor{waingoban-s}{HTML}{493739}
\definecolor{waingrid}{HTML}{FAE0B2}
\definecolor{wainblack}{HTML}{4B4B4D} %BLACK STONE
\definecolor{wainshade}{HTML}{E6E7E8}
\definecolor{wainwhite}{HTML}{EFEFEF} %WHITE STONE
```


```
\pgfgodefineplayer[from = default-neutral]{wain-neutral}{
 stone = {
  line = {
   true,
   color = waingrid,
   width = 0.2pt,
   opacity = 1,
  },
  fill = {
   true,
   color = wainblack!50!wainwhite,
   opacity = 1,
  },
  radius = 0.17cm,
  scale = 1,
  drop shadow = {true, opacity = 0.5, offset = 1pt, angle = -45},
  shine = {true, angle = 45, color = wainshade}
 },
 move = {
  label = {
   color = black,
   format = arabic,
  }
 },
 mark = {
  line = {
   color = waingoban,
   width = 1pt,
  },
  label = {
   color = waingoban,
   format = arabic
  },
 }
}
```

```
\pgfgodefineplayer[from = wain-neutral]{wain-white}{
 stone = {
  fill = {
   color = wainwhite
  }
 },
 move = {
  label = {
   color = waingoban
  }
 },
 mark = {
  line = {
   color = waingoban,
  },
  label = {color = waingoban}
 }
}
```

```
\pgfgodefineplayer[from = wain-neutral]{wain-black}{
 stone = {
  fill = {
   color = wainblack
  }
 },
 move = {
  label = {
   color = waingrid
  }
 },
 mark = {
  line = {
   color = waingrid,
  },
  label = {color = waingrid}
 }
}
```


## 9.2 Boards

### 9.2.1 pgfgo

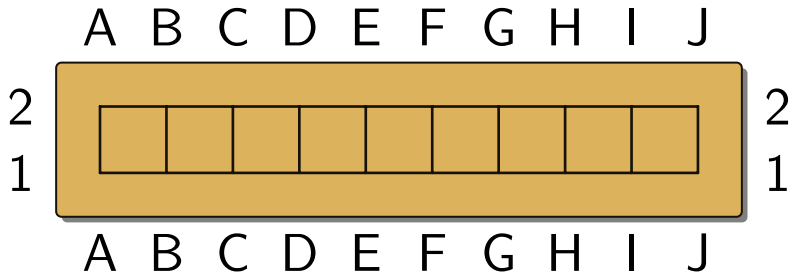


```
\pgfgodefinegoban{pgfgo}{
 background = {
  fill = {
   color = pgfgo,
   opacity = 1},
  line = {
   color = pgfgo!10!black,
   opacity = 1},
  drop shadow = {true},
  rounded corners = {
   inner = 0pt,
   outer = 2pt
  }},
 grid = {
  line = {
   color = pgfgo!10!black,
   width = 1pt}},
 label = {
  color = black
 }
}
```


### 9.2.2 pgfgosmooth

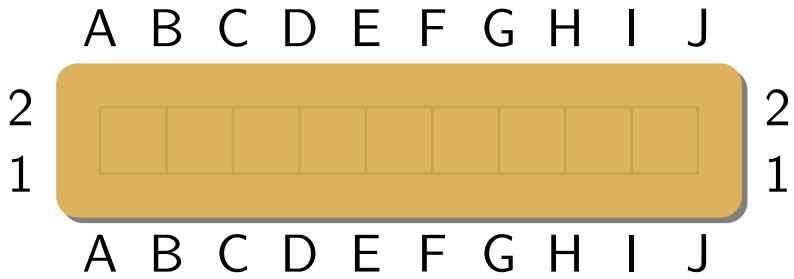


```
\definecolor{pgfgosmooth-grid}{HTML}{C7A253}

\pgfgodefinegoban[from = pgfgo]{pgfgosmooth}{
 background = {
  line = false,
  rounded corners = {
   inner = 2pt,
   outer = 8pt
  },
  drop shadow = {true}},
 grid = {
  line = {color = pgfgosmooth-grid}
  }
}
```


### 9.2.3 wain

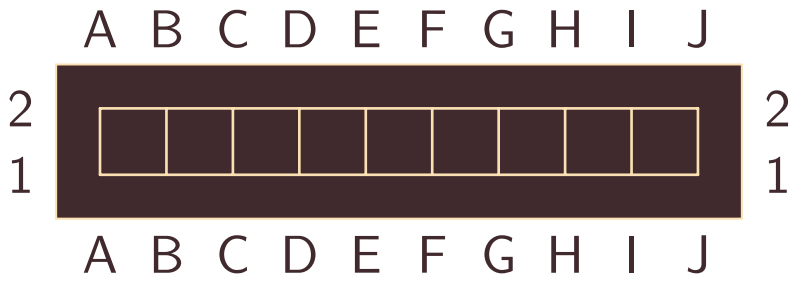


```
\pgfgodefinegoban[from = default]{wain}{
 background = {
  fill = {
   color = waingoban,
   opacity = 1},
  line = {
   color = waingrid,
   opacity = 1}},
 grid = {
  line = {
   color = waingrid,
   width = 1pt}
  },
 label = {color = waingoban}
}
```

## 9.3 Whole Profiles

### 9.3.1 simple

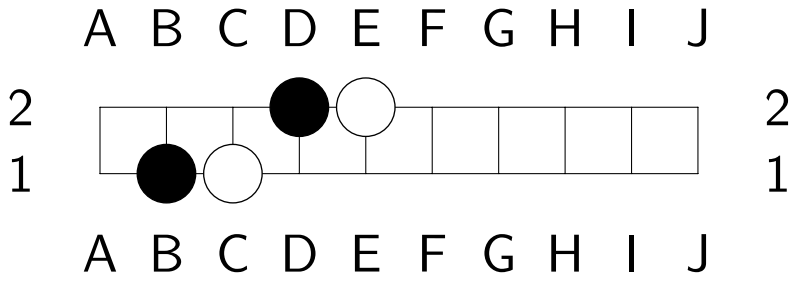


```
\pgfgodefineprofile[from = default]{simple}{
 goban = {
  background = {line = false},
  grid = {line = {width = 0.4pt}}
 },
 all = {stone = {line = {width = 0.5pt}}}
}
```